


# PHILIPS ADVANCE

## Electrical Specifications

|                      |                         |
|----------------------|-------------------------|
| <b>ICN-2S86@120V</b> |                         |
| Brand Name           | <b>CENTIUM</b>          |
| Ballast Type         | <b>Electronic</b>       |
| Starting Method      | <b>Programmed Start</b> |
| Lamp Connection      | <b>Series</b>           |
| Input Voltage        | <b>120</b>              |
| Input Frequency      | <b>50/60HZ</b>          |
| Status               | <b>Active</b>           |

| Lamp Type  | Num. of Lamps | Rated Lamp Watts | Min. Start Temp (°F/°C) | Input Current (Amps) | Input Power (ANSI Watts) | Ballast Factor | MAX THD % | Power Factor | MAX Lamp Current Crest Factor | B.E.F. |
|------------|---------------|------------------|-------------------------|----------------------|--------------------------|----------------|-----------|--------------|-------------------------------|--------|
| F48T8/HO   | 1             | 44               | -20/-29                 | 0.50                 | 59                       | 1.02           | 20        | 0.98         | 1.5                           | 1.73   |
| F48T8/HO   | 2             | 44               | -20/-29                 | 0.84                 | 98                       | 0.95           | 10        | 0.98         | 1.5                           | 0.97   |
| F60T8/HO   | 1             | 55               | -20/-29                 | 0.58                 | 70                       | 1.00           | 20        | 0.98         | 1.5                           | 1.43   |
| F60T8/HO   | 2             | 55               | -20/-29                 | 1.04                 | 118                      | 0.92           | 10        | 0.98         | 1.4                           | 0.78   |
| F72T8/HO   | 1             | 65               | -20/-29                 | 0.68                 | 81                       | 1.00           | 15        | 0.98         | 1.5                           | 1.23   |
| F72T8/HO   | 2             | 65               | -20/-29                 | 1.21                 | 140                      | 0.94           | 10        | 0.98         | 1.4                           | 0.67   |
| F96T8/HO   | 1             | 86               | -20/-29                 | 0.84                 | 100                      | 1.00           | 10        | 0.98         | 1.5                           | 1.00   |
| * F96T8/HO | 2             | 86               | -20/-29                 | 1.57                 | 185                      | 0.95           | 10        | 0.98         | 1.4                           | 0.51   |

### Wiring Diagram

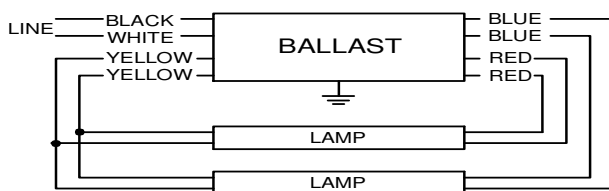


Diag. 21

The wiring diagram that appears above is for the lamp type denoted by the asterisk (\*)

### Standard Lead Length (inches)

|        | in. | cm.   |              | in. | cm. |
|--------|-----|-------|--------------|-----|-----|
| Black  | 22  | 55.9  | Yellow/Blue  |     | 0   |
| White  | 22  | 55.9  | Blue/White   |     | 0   |
| Blue   | 46  | 116.8 | Brown        |     | 0   |
| Red    | 46  | 116.8 | Orange       |     | 0   |
| Yellow | 70  | 177.8 | Orange/Black |     | 0   |
| Gray   |     | 0     | Black/White  |     | 0   |
| Violet |     | 0     | Red/White    |     | 0   |

### Enclosure

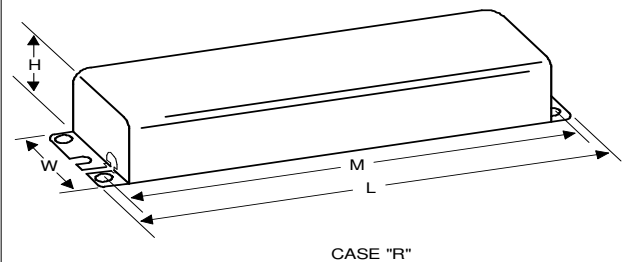

### Enclosure Dimensions

| OverAll (L) | Width (W) | Height (H) | Mounting (M) |
|-------------|-----------|------------|--------------|
| 11.75 "     | 2.875 "   | 1.78125 "  | 11.14062 "   |
| 11 3/4      | 2 7/8     | 1 25/32    | 11 9/64      |
| 29.8 cm     | 7.3 cm    | 4.5 cm     | 28.3 cm      |



Revised 09/21/05

Data is based upon tests performed by Philips Lighting N.A in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

## Philips Lighting Electronic N.A

10275 West Higgins Road Rosemont, IL 60018 Tel.: 800-322-2086 Fax: 888-432-1882  
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886

# PHILIPS ADVANCE

|                      |                         |
|----------------------|-------------------------|
| <b>ICN-2S86@120V</b> |                         |
| Brand Name           | <b>CENTIUM</b>          |
| Ballast Type         | <b>Electronic</b>       |
| Starting Method      | <b>Programmed Start</b> |
| Lamp Connection      | <b>Series</b>           |
| Input Voltage        | <b>120</b>              |
| Input Frequency      | <b>50/60HZ</b>          |
| Status               | <b>Active</b>           |

## Electrical Specifications

### Notes:

#### Section I - Physical Characteristics

- 1.1 Ballast shall be physically interchangeable with standard electromagnetic or standard electronic ballasts, where applicable.
- 1.2 Ballast shall be provided with integral leads color-coded per ANSI C82.11.

#### Section II - Performance

- 2.1 Ballast shall be \_\_\_\_\_ (Instant, Rapid or Programmed) Start.
- 2.2 Ballast shall provide Independent Lamp Operation (ILO) for Instant Start ballasts allowing remaining lamp(s) to maintain full light output when one or more lamps fail.
- 2.3 Ballast shall contain auto restart circuitry in order to restart lamps without resetting power (except T8/HO ballast).
- 2.4 Ballast shall operate from 50/60 Hz input source of \_\_\_\_\_ (120V through 277V or 347V through 480V) with sustained variations of +/- 10% (voltage and frequency).
- 2.5 Ballast shall be high frequency electronic type and operate lamps at a frequency above 42 kHz to avoid interference with infrared devices and eliminate visible flicker.
- 2.6 Ballast shall have a Power Factor greater than 0.98 for primary lamp.
- 2.7 Ballast shall have a minimum ballast factor for primary lamp application as follows: 0.75 for Low Watt, 0.85 for Normal Light Output and 1.20 for High Light.
- 2.8 Ballast shall provide for a Lamp Current Crest Factor of 1.7 or less.
- 2.9 Ballast input current shall have Total Harmonic Distortion (THD) of less than 10% when operated at nominal line voltage with primary lamp.
- 2.10 Ballast shall have a Class A sound rating for all 4-foot lamps and smaller.
- 2.11 Ballast shall have a minimum starting temperature of \_\_\_\_\_ [-18C (0F) for standard T8 and Long Twin Tube lamps, 10C (50F) for standard T12 lamps, 0C (32F) for Slimline T8 lamps, -29C (-20F) for HO lamps.] for primary lamp application. Ballast shall have a minimum starting temperature of 16C (60F) for energy-saving lamps.
- 2.12 Ballast shall tolerate sustained open circuit and short circuit output conditions.
- 2.13 Ballast for T8 lamps shall provide lamp striation-reduction circuitry.
- 2.14 Ballast for FT5 lamps shall provide lamp EOL protection circuitry.

#### Section III - Regulatory

- 3.1 Ballast shall not contain any Polychlorinated Biphenyl (PCB).
- 3.2 Ballast shall be Underwriters Laboratories (UL) listed, Class P and Type 1 Outdoor; and Canadian Standards Association (CSA) certified where applicable.
- 3.3 Ballast shall comply with ANSI C62.41 Category A for Transient protection.
- 3.4 Ballast shall comply with ANSI C82.11 where applicable.
- 3.5 Ballast shall comply with applicable requirements of the Federal Communications Commission (FCC) rules and regulations, Title 47 CFR part 18, for Non-Consumer equipment.
- 3.6 Ballast shall comply with NEMA 410 for in-rush current limits.
- 3.7 Ballast for T8 lamps shall meet NEMA Premium/CEE High Performance T8 Lighting System Specifications.
- 3.8 Ballast shall meet RoHS Compliance Standards

#### Section IV - Other

- 4.1 Ballast shall be manufactured in a factory certified to ISO 9001 Quality System Standards.
- 4.2 Ballast shall carry a five-year warranty from date of manufacture against defects in material or workmanship, including replacement, for operation at a maximum case temperature of 70C.
- 4.3 Manufacturer shall have a twenty-year history of producing electronic ballasts for the North American market.
- 4.4 Energy saving T8 lamps (25W, 28W or 30W) may experience lamp striations if operated on ballasts not rated for their use.



Revised 09/21/05

Data is based upon tests performed by Philips Lighting Electronic N.A. in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

### **Philips Lighting Electronic N.A.**

10275 West Higgins Road Rosemont, IL 60018 Tel.: 800-322-2086 Fax: 888-432-1882  
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886


# PHILIPS ADVANCE

## Electrical Specifications

|                      |                         |
|----------------------|-------------------------|
| <b>ICN-2S86@277V</b> |                         |
| Brand Name           | <b>CENTIUM</b>          |
| Ballast Type         | <b>Electronic</b>       |
| Starting Method      | <b>Programmed Start</b> |
| Lamp Connection      | <b>Series</b>           |
| Input Voltage        | <b>277</b>              |
| Input Frequency      | <b>50/60HZ</b>          |
| Status               | <b>Active</b>           |

| Lamp Type  | Num. of Lamps | Rated Lamp Watts | Min. Start Temp (°F/°C) | Input Current (Amps) | Input Power (ANSI Watts) | Ballast Factor | MAX THD % | Power Factor | MAX Lamp Current Crest Factor | B.E.F. |
|------------|---------------|------------------|-------------------------|----------------------|--------------------------|----------------|-----------|--------------|-------------------------------|--------|
| F48T8/HO   | 1             | 44               | -20/-29                 | 0.23                 | 59                       | 1.02           | 20        | 0.98         | 1.5                           | 1.73   |
| F48T8/HO   | 2             | 44               | -20/-29                 | 0.36                 | 98                       | 0.95           | 10        | 0.98         | 1.5                           | 0.97   |
| F60T8/HO   | 1             | 55               | -20/-29                 | 0.26                 | 70                       | 1.00           | 20        | 0.98         | 1.5                           | 1.43   |
| F60T8/HO   | 2             | 55               | -20/-29                 | 0.45                 | 118                      | 0.92           | 10        | 0.98         | 1.4                           | 0.78   |
| F72T8/HO   | 1             | 65               | -20/-29                 | 0.30                 | 81                       | 1.00           | 15        | 0.98         | 1.5                           | 1.23   |
| F72T8/HO   | 2             | 65               | -20/-29                 | 0.54                 | 140                      | 0.94           | 10        | 0.98         | 1.4                           | 0.67   |
| * F96T8/HO | 1             | 86               | -20/-29                 | 0.36                 | 100                      | 1.00           | 10        | 0.98         | 1.5                           | 1.00   |
| F96T8/HO   | 2             | 86               | -20/-29                 | 0.68                 | 185                      | 0.95           | 10        | 0.98         | 1.4                           | 0.51   |

### Wiring Diagram

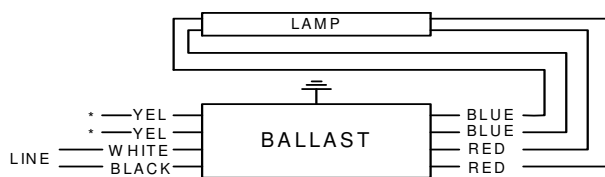

\*FOR SINGLE LAMP OPERATION, INSULATE YELLOW LEADS INDIVIDUALLY FOR 1000V

Diag. 39A


The wiring diagram that appears above is for the lamp type denoted by the asterisk (\*)

### Standard Lead Length (inches)

|        | in. | cm.   |
|--------|-----|-------|
| Black  | 22  | 55.9  |
| White  | 22  | 55.9  |
| Blue   | 46  | 116.8 |
| Red    | 46  | 116.8 |
| Yellow | 70  | 177.8 |
| Gray   |     | 0     |
| Violet |     | 0     |

|              | in. | cm. |
|--------------|-----|-----|
| Yellow/Blue  |     | 0   |
| Blue/White   |     | 0   |
| Brown        |     | 0   |
| Orange       |     | 0   |
| Orange/Black |     | 0   |
| Black/White  |     | 0   |
| Red/White    |     | 0   |

### Enclosure

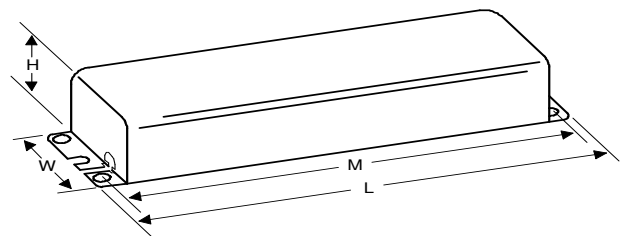

CASE "R"

### Enclosure Dimensions

| OverAll (L) | Width (W) | Height (H) | Mounting (M) |
|-------------|-----------|------------|--------------|
| 11.75 "     | 2.875 "   | 1.78125 "  | 11.14062 "   |
| 11 3/4      | 2 7/8     | 1 25/32    | 11 9/64      |
| 29.8 cm     | 7.3 cm    | 4.5 cm     | 28.3 cm      |



Revised 01/26/04

Data is based upon tests performed by Philips Lighting N.A in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

### Philips Lighting Electronic N.A

10275 West Higgins Road Rosemont, IL 60018 Tel.: 800-322-2086 Fax: 888-432-1882  
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886

# PHILIPS ADVANCE

|                      |                         |
|----------------------|-------------------------|
| <b>ICN-2S86@277V</b> |                         |
| Brand Name           | <b>CENTIUM</b>          |
| Ballast Type         | <b>Electronic</b>       |
| Starting Method      | <b>Programmed Start</b> |
| Lamp Connection      | <b>Series</b>           |
| Input Voltage        | <b>277</b>              |
| Input Frequency      | <b>50/60HZ</b>          |
| Status               | <b>Active</b>           |

## Electrical Specifications

### Notes:

#### Section I - Physical Characteristics

- 1.1 Ballast shall be physically interchangeable with standard electromagnetic or standard electronic ballasts, where applicable.
- 1.2 Ballast shall be provided with integral leads color-coded per ANSI C82.11.

#### Section II - Performance

- 2.1 Ballast shall be \_\_\_\_\_ (Instant, Rapid or Programmed) Start.
- 2.2 Ballast shall provide Independent Lamp Operation (ILO) for Instant Start ballasts allowing remaining lamp(s) to maintain full light output when one or more lamps fail.
- 2.3 Ballast shall contain auto restart circuitry in order to restart lamps without resetting power (except T8/HO ballast).
- 2.4 Ballast shall operate from 50/60 Hz input source of \_\_\_\_\_ (120V through 277V or 347V through 480V) with sustained variations of +/- 10% (voltage and frequency).
- 2.5 Ballast shall be high frequency electronic type and operate lamps at a frequency above 42 kHz to avoid interference with infrared devices and eliminate visible flicker.
- 2.6 Ballast shall have a Power Factor greater than 0.98 for primary lamp.
- 2.7 Ballast shall have a minimum ballast factor for primary lamp application as follows: 0.75 for Low Watt, 0.85 for Normal Light Output and 1.20 for High Light.
- 2.8 Ballast shall provide for a Lamp Current Crest Factor of 1.7 or less.
- 2.9 Ballast input current shall have Total Harmonic Distortion (THD) of less than 10% when operated at nominal line voltage with primary lamp.
- 2.10 Ballast shall have a Class A sound rating for all 4-foot lamps and smaller.
- 2.11 Ballast shall have a minimum starting temperature of \_\_\_\_\_ [-18C (0F) for standard T8 and Long Twin Tube lamps, 10C (50F) for standard T12 lamps, 0C (32F) for Slimline T8 lamps, -29C (-20F) for HO lamps.] for primary lamp application. Ballast shall have a minimum starting temperature of 16C (60F) for energy-saving lamps.
- 2.12 Ballast shall tolerate sustained open circuit and short circuit output conditions.
- 2.13 Ballast for T8 lamps shall provide lamp striation-reduction circuitry.
- 2.14 Ballast for FT5 lamps shall provide lamp EOL protection circuitry.

#### Section III - Regulatory

- 3.1 Ballast shall not contain any Polychlorinated Biphenyl (PCB).
- 3.2 Ballast shall be Underwriters Laboratories (UL) listed, Class P and Type 1 Outdoor; and Canadian Standards Association (CSA) certified where applicable.
- 3.3 Ballast shall comply with ANSI C62.41 Category A for Transient protection.
- 3.4 Ballast shall comply with ANSI C82.11 where applicable.
- 3.5 Ballast shall comply with applicable requirements of the Federal Communications Commission (FCC) rules and regulations, Title 47 CFR part 18, for Non-Consumer equipment.
- 3.6 Ballast shall comply with NEMA 410 for in-rush current limits.
- 3.7 Ballast for T8 lamps shall meet NEMA Premium/CEE High Performance T8 Lighting System Specifications.
- 3.8 Ballast shall meet RoHS Compliance Standards

#### Section IV - Other

- 4.1 Ballast shall be manufactured in a factory certified to ISO 9001 Quality System Standards.
- 4.2 Ballast shall carry a five-year warranty from date of manufacture against defects in material or workmanship, including replacement, for operation at a maximum case temperature of 70C.
- 4.3 Manufacturer shall have a twenty-year history of producing electronic ballasts for the North American market.
- 4.4 Energy saving T8 lamps (25W, 28W or 30W) may experience lamp striations if operated on ballasts not rated for their use.



Revised 01/26/04

Data is based upon tests performed by Philips Lighting Electronic N.A. in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

### **Philips Lighting Electronic N.A.**

10275 West Higgins Road Rosemont, IL 60018 Tel.: 800-322-2086 Fax: 888-432-1882  
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886