

SPECIFICATION

NEXLEDS®

NEXLEDS LTD




18W

2700K (1389 LM)	3000K (1409 LM)	3500K (1437 LM)	4000K (1460 LM)	5000K (1426 LM)
---------------------------	---------------------------	---------------------------	---------------------------	---------------------------

24W

2700K (2191 LM)	3000K (2203 LM)	3500K (2217 LM)	4000K (2256 LM)	5000K (2231 LM)
---------------------------	---------------------------	---------------------------	---------------------------	---------------------------

5 CCT
Changeable



VIDEO



9" / 11" Die-cast Flush Mount Panel

NX-9SMPL18W-5CCT-WH

NX-11SMPL24W-5CCT-WH

Specification


PRODUCT NAME :	9" Die-cast Flush Mount Panel	11" Die-cast Flush Mount Panel
MODEL NO. :	NX-9SMPL18W-5CCT-WH	NX-11SMPL24W-5CCT-WH
SPECIFICATION :	AC120V; 50/60Hz; 18W;	AC120V; 50/60Hz; 24W;
WORKING TEMP :	-4(°F)~+122(°F)	-4(°F)~+122(°F)
POWER FACTOR :	>0.90; Flicker free	>0.90; Flicker free
CRI(RA) :	>90	>90
COLOR :	White Color	White Color
LIGHT SOURCE :	SMD2835 Chip	SMD2835 Chip
LUMEN :	1460lm	2256lm
LIFE TIME :	50000 hrs	50000 hrs
BEAM ANGLE :	120°	120°
PRODUCT SIZE :	D(8.86 inch)*H(0.79inch)	D(10.98 inch)*H(0.98inch)
IP :	Suitable for Damp location	Suitable for Damp location
APPLICATION :	Home, Shop, Hotel	Home, Shop, Hotel
WARRANTY :	5 years	5 years
STANDARD :	ETL	ETL
DIMMABLE :	Triac Dimming	Triac Dimming
COLOR TEMP :	2700K-3000K-3500K-4000K-5000K Changleable	

Feature:

- Emits evenly, without halo and shadow;
- Fit 2.75 or 3.5 inch J-Box;
- Support surface mount;
- Die-cast trim;
- Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.

Die-cast trim

Precision casting, excellent heat dissipation, high corrosion; 9" lamp thickness only 0.79"; 11" lamp thickness only 0.98"

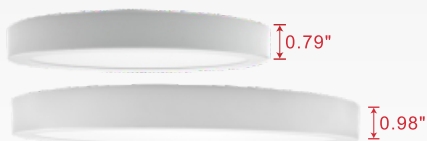


Color temperature optional
2700K-5000K



Mounting bracket



With multiple apertures, can be installed into any 2.75 or 3.5inch junction box.

2.75" Junction Box installation hole



3.5" Junction Box installation hole

Dimension:

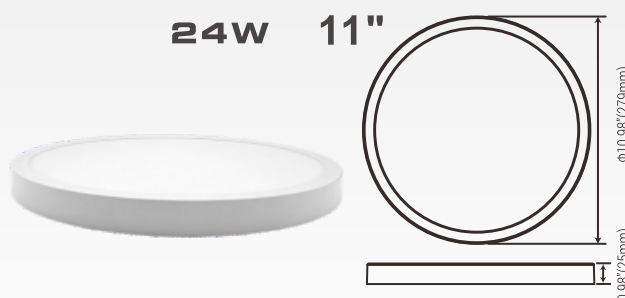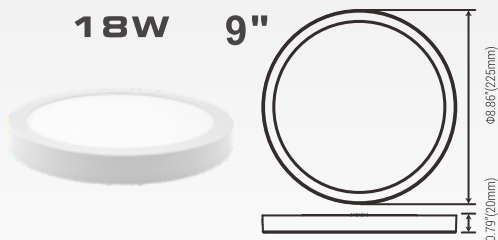


Installation :

1.Remove the bracket from the fixture by twisting in anticlockwise direction, see Fig1.



2.Refer to the hole position on the bracket and do the matching to J-Box. Attach them with screws, see Fig2.

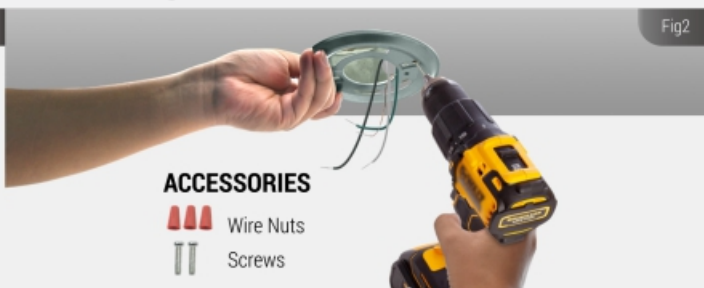

3.Connect supply wires to wires on fixture/bracket with wire nuts. Attach white to white, black to black, and copper wire to green wire as grounding connection, select lamp color desired with the CCT switch, see Fig3.



4.Arrange the wires into the J-Box. Align the 2 screw points on fixture to the wider side of long holes on the bracket, twist in clockwise direction until fixing stable. Turn on the power after installation, check the fixture can work well, see Fig4.

