

⚠ Risk of fire and electricity The installation must be done by electricians or professionals. Turn off the power supply before operation.

Pendant Mounting for Drywall Ceiling


➤ Safety Instructions

1. Read these instructions carefully before installation. Ensure the installation complies with national and local electrical laws and regulations.
2. The product must be installed by a qualified and licensed electrician.
3. Do not install in humid areas; this product is designed for dry, non-humid environments only.
4. Always turn off the power supply before installation or maintenance.
5. To reduce the risk of fire and overheating, ensure all connections are secure.
6. Fixtures must not be covered with thermal insulation pads or similar materials under any circumstances.
7. This product is not suitable for outdoor use.


➤ Parts List:



Screws




Embedded Side Cover

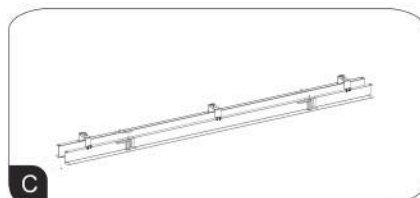

Embedded Mounting Bracket

Mounting Steps

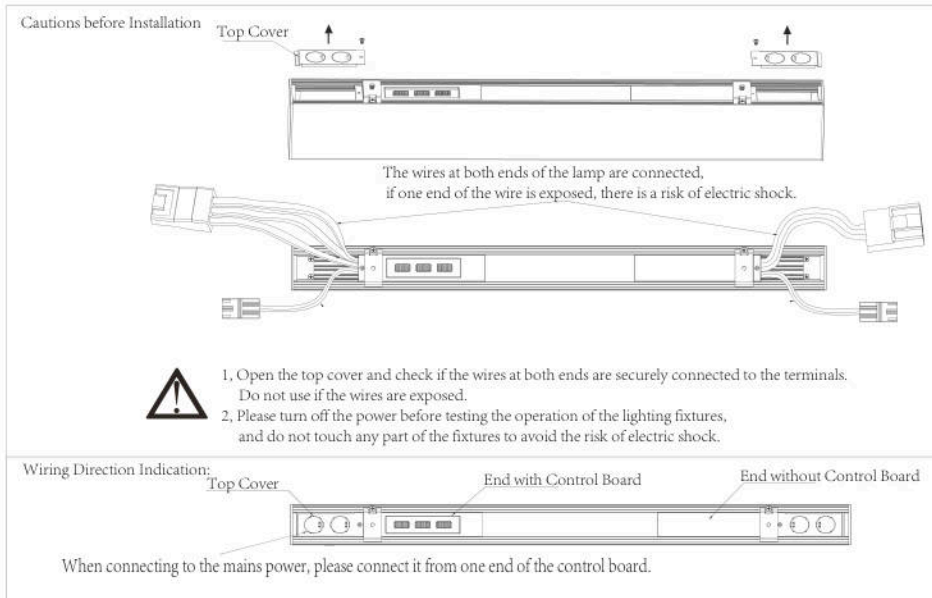


1 Precautions before installation


When unsure of the stability of the installation surface, please use a safety rope for protection. Verify the stability of surface for safety rope before proceeding, with the installation to prevent any potential falls.

Notes:


1. This mounting kit is suitable for walls with a thickness of 3-30mm. Please check if the mounting surface is firm and capable of bearing the weight of fixture before installation. Do not install in flammable environments.
2. Check the mounting kit for any damage before installation. Ensure to disconnect the power supply before installation.

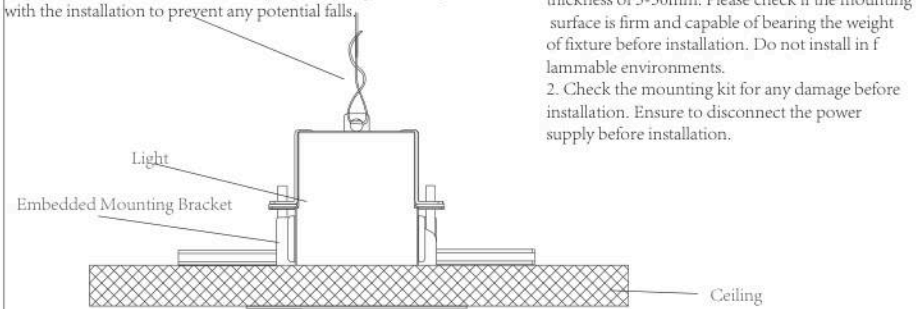

2 Reserve installation holes in the ceiling.

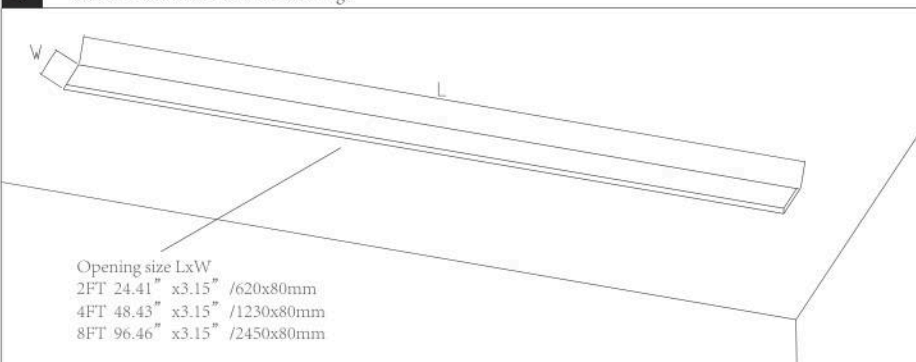


3 Remove the rubber plugs from the embedded mounting bracket, then fit the embedded mounting bracket onto the fixture.

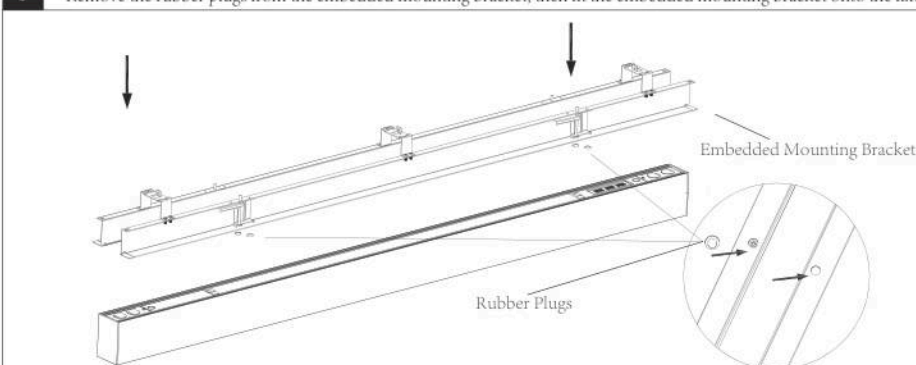


! Risk of fire and electricity The installation must be done by electricians or professionals Turn off the power supply before operation.

4 Put on the embedded side cover.

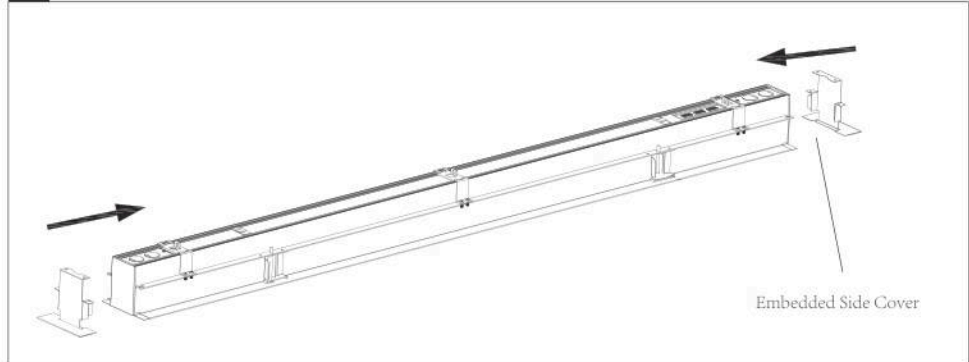


5 Fix the fixture onto the embedded mounting bracket with screws.

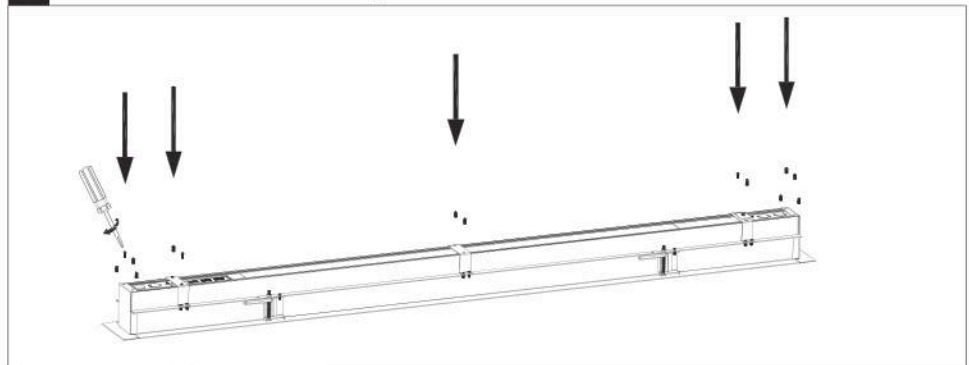

6 Cut off the corresponding terminals as required.

Three-position terminal: BLACK (LINE)
WHITE (NEUTRAL)
GREEN (GRD)

Two terminal: PURPLE (DIM +)
PINK (DIM -)

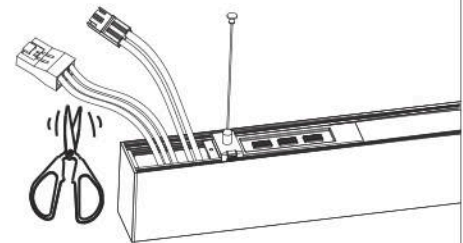

1. After cutting off the connecting terminals, the lighting fixture will no longer be able to link with other fixtures through terminals.
2. After cutting the wires, please ensure proper protection and labeling, and avoid using them for secondary wiring.


Wiring Diagram

Line Voltage		Fixture
LINE		LINE-BLACK
DREEN		GROUND-GREEN
NEUTRAL		NEUTRAL-WHITE
DIM(+)/VIOLET		VIOOLET
DIM(-)/PINK		PINK




1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation.

7 Cut off the fixture's connectors for wiring to line voltage if needed, make wiring according to the wiring diagram in the left.

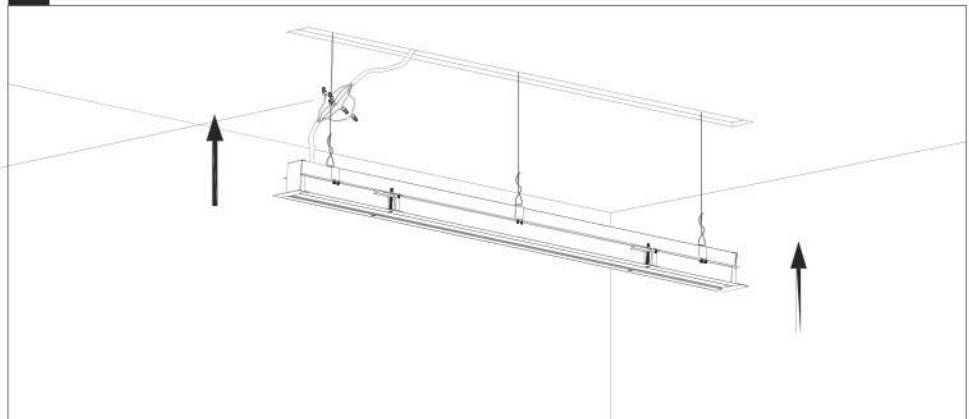


! Risk of fire and electricity The installation must be done by electricians or professionals Turn off the power supply before operation.


- 7** Use a Phillips screwdriver or electric screwdriver to clockwise rotate the holes on the embedded mounting bracket until the fixture is securely fixed to the ceiling.

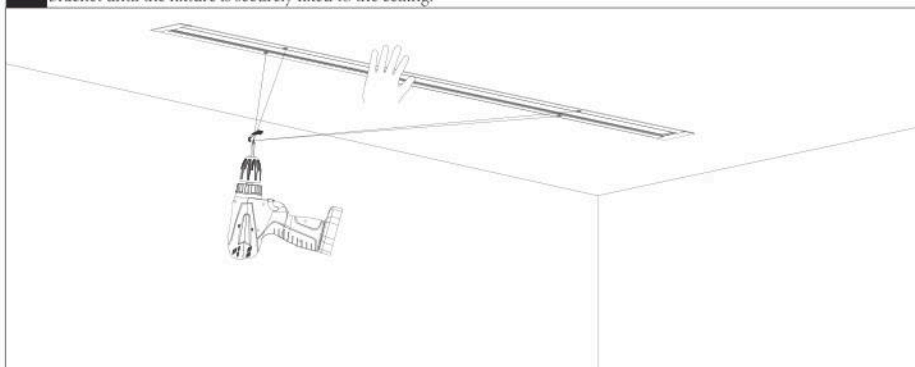


8

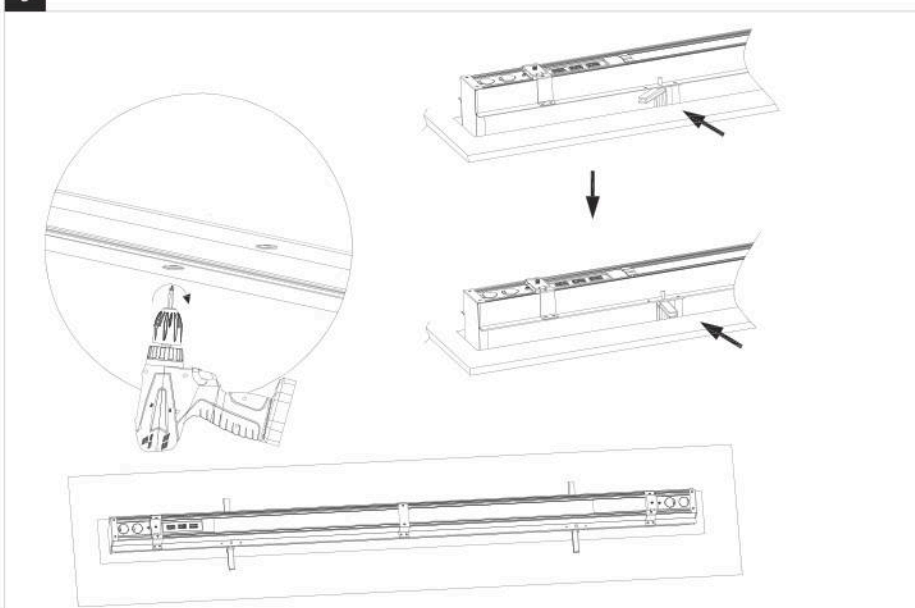

- 9** Put the rubber plug back in place to complete the installation.

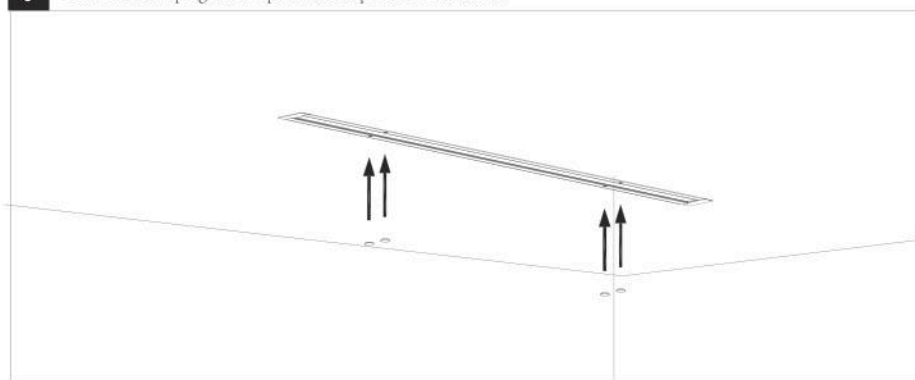

! Risk of fire and electricity The installation must be done by electricians or professionals Turn off the power supply before operation.

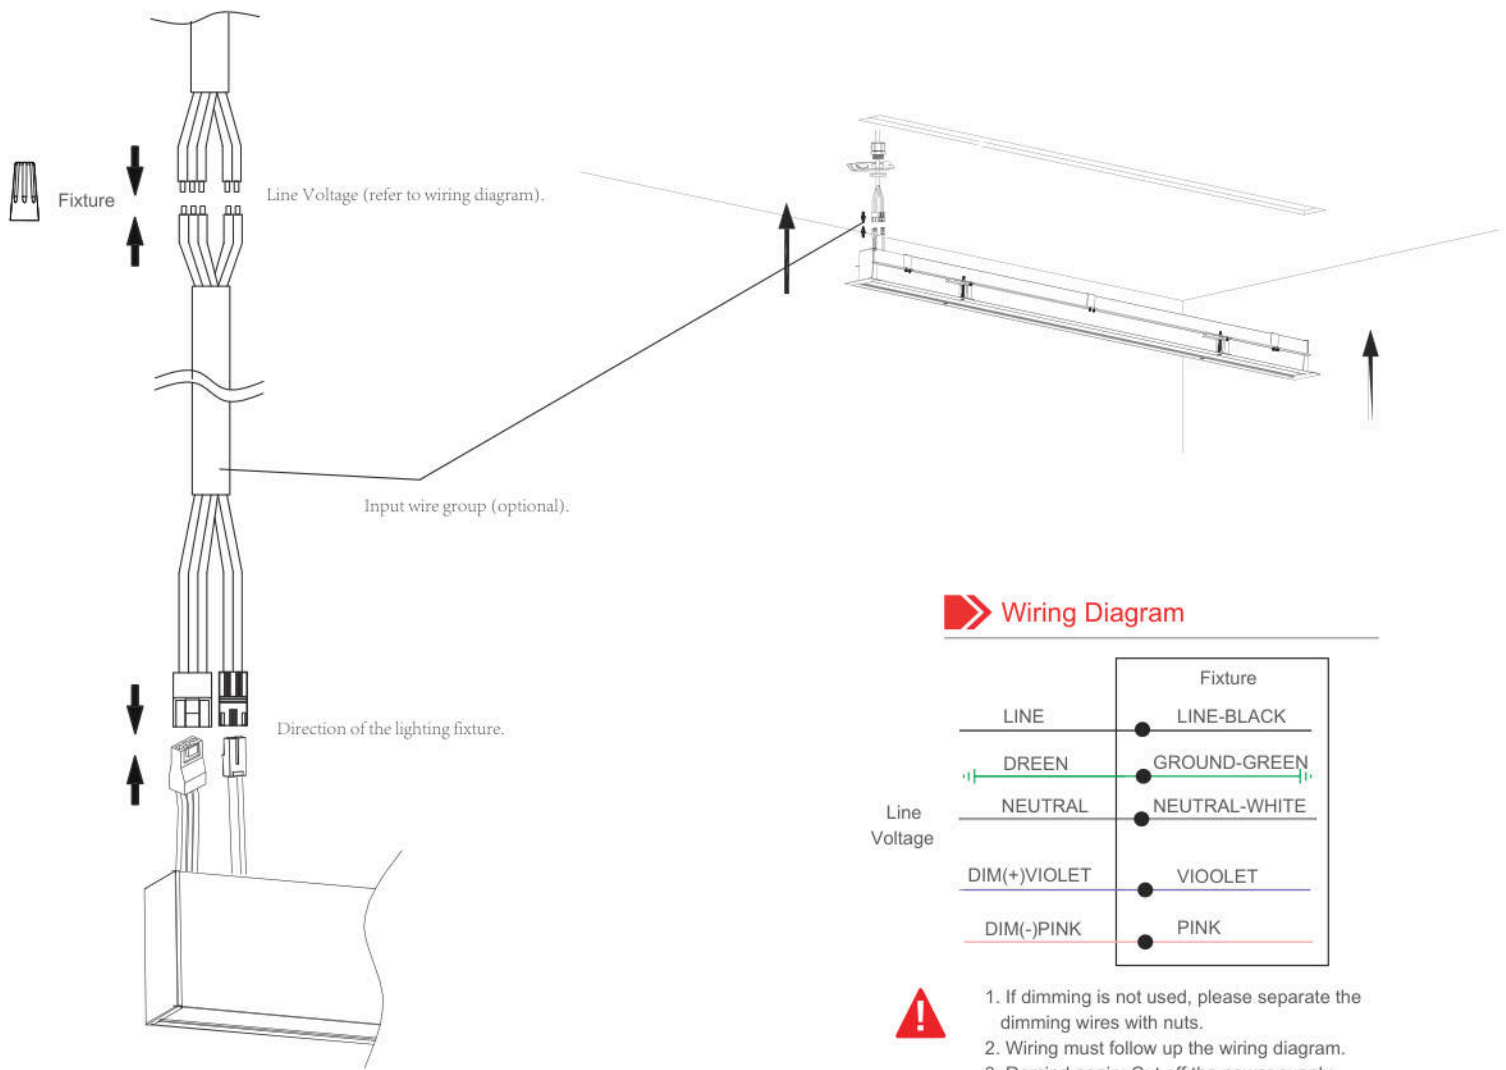

Three terminals: neutral wire, live wire, ground wire
Two terminals: DMI+ (purple), DIM- (pink)

Wiring Diagram


Line Voltage		Fixture	
LINE		●	LINE-BLACK
DEEN		●	GROUND-GREEN
NEUTRAL		●	NEUTRAL-WHITE
DIM(+)VIOLET		●	VIOOLET
DIM(-)PINK		●	PINK




1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation.

Wiring Diagram B


Driver's wires package(optional)



Wire Nuts



Ties



Wires accessories