

ER454480HT-W



Ballast Type:	Electronic	Starting Method:	Programmed Start
Lamp Connection:	Series	Input Voltage:	480
Input Frequency:	50/60 Hz	Sound Rating:	A
Remote Mounting:	18 ft Maximum	Warranty:	Five Years
End-of-Life Protection:	Yes	Max. Case Temperature:	90°C

ELECTRICAL SPECIFICATIONS

Lamp Type	# of Lamps	Rated Lamp Watts	Min. Start Temp. (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	Max THD %	Power Factor	Max. L.C.C.F.	B.E.F
T5 54W	3	54	-20 / -29	0.36	169	1.00	10	0.99	1.70	0.59
	4			0.46	220	1.00				0.45
T5 49W	3	49		0.34	161	1.00				0.62
	4			0.43	206	1.00				0.49
FT 55W	3	55		0.32	152	0.90				0.59
	4			0.43	202	0.89				0.44
FT 50W	3	50		0.32	150	0.96				0.64
	4			0.42	198	0.95				0.48

REGULATORY COMPLIANCE

- Meets ANSI Standard C82.11
- Meets ANSI Standard C62.41
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)
- No PCB's
- cULus Listed (Class P, Type 1 Outdoor, Type HL)
- RoHS Compliant



ULTRASAVE LIGHTING LTD.

12-140 AMBER STREET, MARKHAM, ON L3R 3J8

TEL 905.940.0888


FAX 905.940.0338

WWW.ULTRASAVE.CA


PHYSICAL CHARACTERISTICS

WIRING DIAGRAM

T5HO

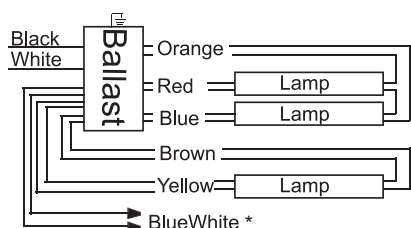


* Cap off each BlueWhite wire separately

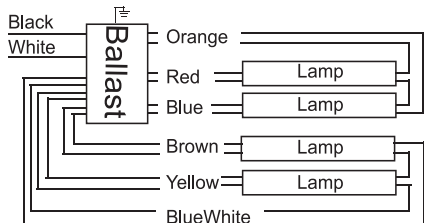


WIRING DIAGRAM

BIAX / PL-L

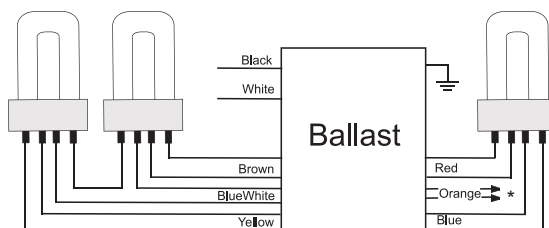

* Cap off each Orange wire separately

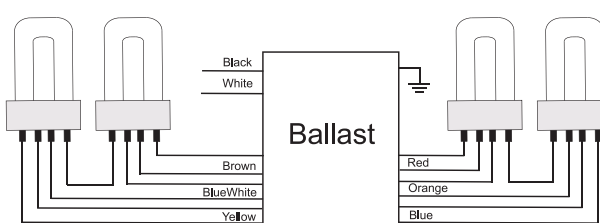


CASE DIMENSIONS

Overall (L)	15.55"
Width (W)	1.54"
Height (H)	1.18"
Mounting (M)	15.28"

LEAD LENGTH

Wire	Black	White	Blue	Red	Yellow	BlueWhite	Orange	Brown
in	18	18	30	30	30	48	56	40

HOT SPOT LOCATION

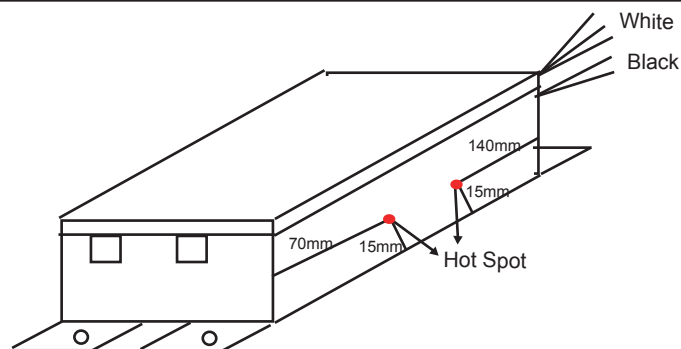

ORDERING INFORMATION

Model #	Carton Weight	Carton Dimensions LxWxH	Carton Quantity	Skid Quantity
ER454480HT-W	27.12 lbs	18.90" x 10.24" x 5.91"	10	1000

ULTRASAVE LIGHTING LTD.

12-140 AMBER STREET, MARKHAM, ON L3R 3J8

TEL 905.940.0888

FAX 905.940.0338

WWW.ULTRASAVE.CA