

PR232347-PP-HE



Ballast Type:	Electronic	Starting Method:	Programmed Start
Lamp Connection:	Parallel	Input Voltage:	347
Input Frequency:	50/60 Hz	Sound Rating:	A
Remote Mounting:	18 ft Maximum	Warranty:	Five Years
End-of-Life Protection:	No	Max. Case Temperature:	90°C

ELECTRICAL SPECIFICATIONS

Lamp Type	# of Lamps	Rated Lamp Watts	Min. Start Temp. (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	Max THD %	Power Factor	Max. L.C.C.F.	B.E.F
F40T8	1	40	0 / -18	0.12	43	0.88	10	0.99	1.60	2.05
*F32T8	2	32		0.17	60	0.91				1.52
	1			0.11	35	1.00				2.86
F32T8/ES (30W)	2	30	60 / 16	0.17	57	0.91				1.60
	1			0.10	35	0.98				2.80
F32T8/ES (28W)	2	28		0.15	52	0.91				1.75
	1			0.10	33	0.98				2.97
F32T8/ES (25W)	2	25		0.14	50	0.91				1.82
	1			0.10	31	0.98				3.16
F25T8	2	25		0 / -18	0.14	48				0.92
	1				0.10	31	0.99	3.19		
F17T8	2	17			0.11	36	0.94	2.61		
	1				0.08	24	1.05	4.38		

*Main Lamp Type

REGULATORY COMPLIANCE

- Meets ANSI Standard C82.11
- Meets ANSI Standard C62.41
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)
- No PCB's
- cULus Listed (Class P, Type 1 Outdoor, Type HL)
- RoHS Compliant



ULTRASAVE LIGHTING LTD.

12-140 AMBER STREET, MARKHAM, ON L3R 3J8


TEL 905.940.0888

FAX 905.940.0338


WWW.ULTRASAVE.CA

PHYSICAL CHARACTERISTICS

WIRING DIAGRAM

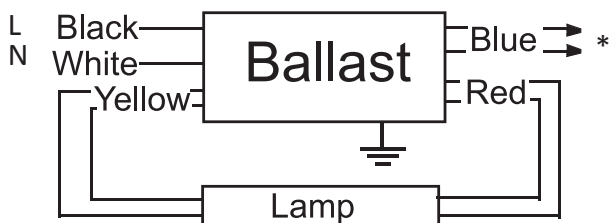

* Cap off each Blue wire separately

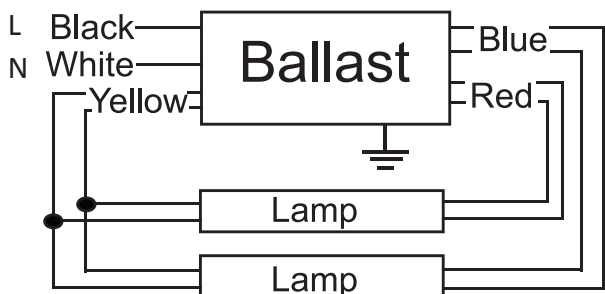

LEAD LENGTH

Wire	in
Black	20
White	20
Blue	31
Red	31
Yellow	47

CASE DIMENSIONS

Overall (L)	9.50"
Width (W)	1.72"
Height (H)	1.18"
Mounting (M)	8.90"

ORDERING INFORMATION

Model #	Carton Weight	Carton Dimensions LxWxH	Carton Quantity	Skid Quantity
PR232347-PP-HE	28.66 lbs	11.02" x 10.63" x 9.06"	20	1000

ULTRASAVE LIGHTING LTD.

12-140 AMBER STREET, MARKHAM, ON L3R 3J8

TEL 905.940.0888

FAX 905.940.0338

WWW.ULTRASAVE.CA