
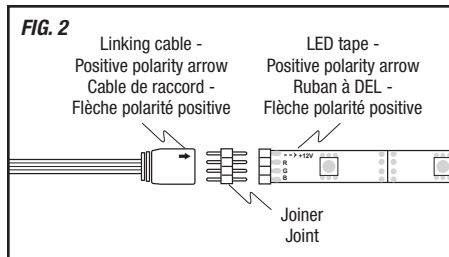


CABINET, COVE & DISPLAY • ARMOIRE, GORGE ET PRÉSENTOIR

COLOUR CHANGING LED TAPE LIGHT KIT

ENSEMBLE DE RUBAN DE DEL AUX COULEURS CHANGEANTES

LED-TP4-123K-RGB

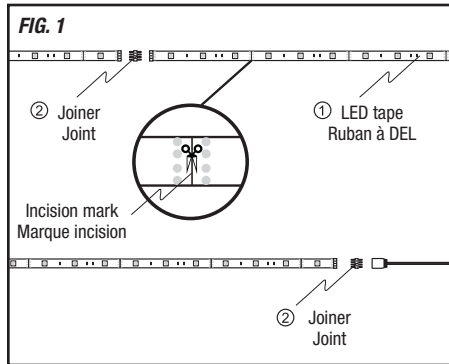

11. Turn on LED lights by aiming LED remote control (7) to the IR sensor on the colour changing controller (5).
12. IR Sensor (located on the colour changing controller (5) must be in line of sight to the LED remote control (7) and must be free from any obstructions.

INSTRUCTIONS D'INSTALLATION

AVERTISSEMENT : Assurez-vous de débrancher l'électricité du réceptacle avant de commencer l'installation ou bien d'en faire la maintenance.

COMPOSANTS D'ASSEMBLAGE

1. Ruban à DEL 50 cm (x 3)
2. Joint (x 6)
3. Câble de raccord 38-5/8 po / 98 cm (x 3)
4. Faisceau à 4 prises
5. Commande de changement de couleurs avec détecteur IR
6. Pilote d'alimentation CA/CC
7. Télécommande pour DEL

INSTRUCTIONS D'ASSEMBLAGE

1. Videz prudemment le contenu de l'emballage sur une surface propre.
2. Enlignez le ruban à DEL (1) à la longueur désirée.
3. Le ruban DEL peut être coupé seulement aux endroits où il y a des marques indiquées (incisions). [Fig. 1]
4. VEUILLEZ NOTER : Les incisions doivent être enlignées avec la polarité positive (+12V-->) du ruban à DEL (1) sinon la partie coupé ne sera pas vis-à-vis.

INSTALLATION INSTRUCTIONS



WARNING: Make certain power supply driver is unplugged from the receptacle before starting installation or attempting any maintenance.

ASSEMBLY COMPONENTS:

1. 20"/50cm LED Tape (x 3)
2. Joiners (x 6)
3. 38-5/8" / 98cm Linking Cables (x 3)
4. 4-Port Wiring Hub
5. Colour Changing Controller with IR Sensor
6. AC/DC Power Supply Driver
7. LED Remote Control

ASSEMBLY INSTRUCTIONS:

1. Carefully unpack contents onto a clean surface.
2. Align LED tape (1) to the desired length required.
3. LED tape (1) can be cut only where the incisions mark is indicated. [Fig. 1]
4. PLEASE NOTE: Incisions must align with the positive polarity (+12V-->) of LED tape (1) or the cut section will not light up.
5. Attach joiner (2) to the LED tape (1), then connect to the linking cable (3) in-line with the positive polarity (+12V-->) of the LED tape (1). Alternatively, attach remaining 2 sections of LED tape using joiners (6) and following polarity on adjacent links. [Fig. 2]
6. Connect all linking cables (3) to the 4-port wiring hub (4), and then attach the 4-port wiring hub (4) to the colour changing controller (5) [Fig. 3]. Ensure the connection to positive polarity is completed by aligning the arrows indicated from either connector. Alternatively, if all LED tape (1) is connected in-line, (where no 4-port hub (4) is required), connect the LED tape (1) direct to the colour changing controller (5) in-line with the positive polarity (+12V-->) [Fig. 4].
7. The surface area where the LED tape will be applied must be cleaned for dust (etc.) to establish a firm adhesive.
8. Once all positioning is confirmed, remove paper strip from the back of the LED tape (1) and apply firmly to the desired location.
9. Install AC/DC power supply driver (6) to colour changing controller (5) to complete assembly.
10. Plug in AC/DC power supply driver (6) to outlet receptacle.

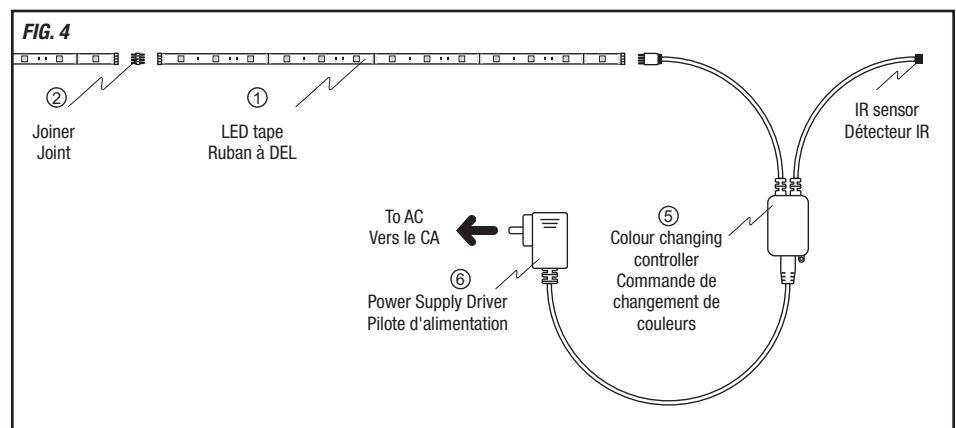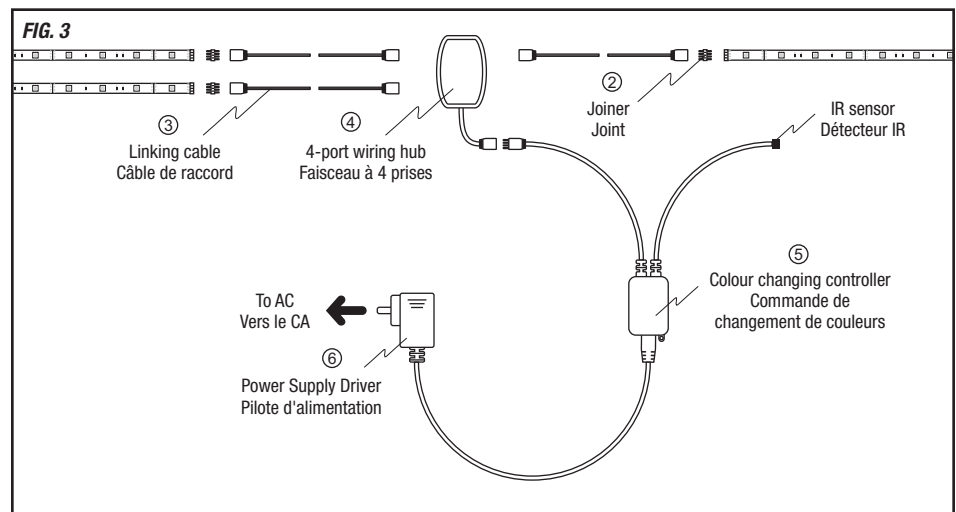

Liteline Corporation

Info@liteline.com
www.liteline.com

8 Abacus Road, Brampton
Ontario, Canada L6T 5B7




416-996-1856
1-866-730-7704



905-794-1990
1-888-738-9736

**COLOUR CHANGING REMOTE CONTROL
TÉLECOMMANDE POUR LE CHANGEMENT DES COULEURS**

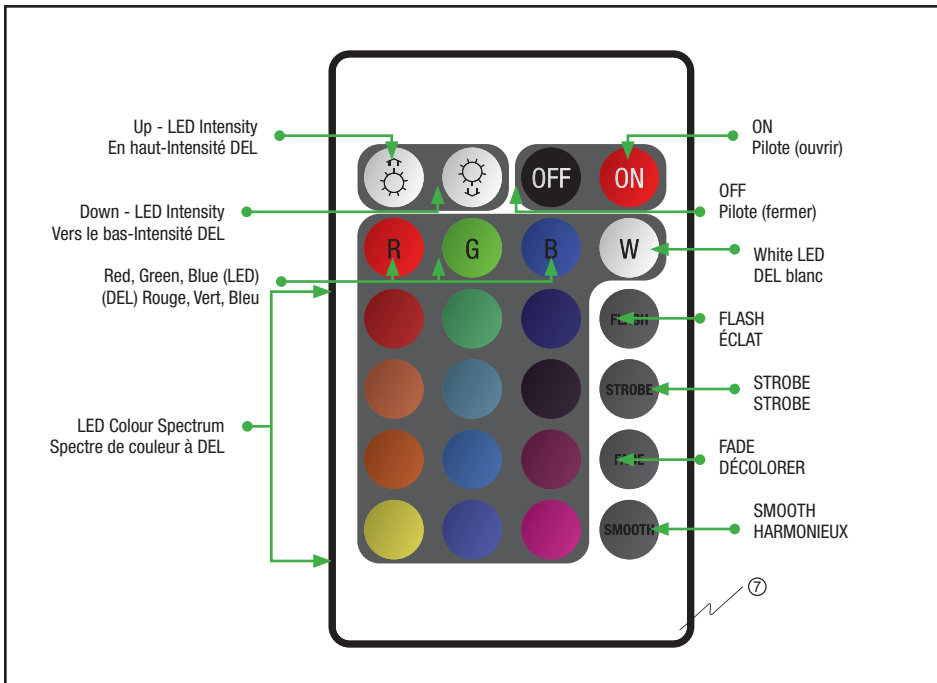

ON: power on.
 OFF: power off.
 Red LED: change colour to static red.
 Green LED: change colour to static green.
 Blue LED: change colour to static blue.
 White LED: change colour to static white.
 LED Colour Spectrum: change colour to static colour indicated by the button.
 FLASH: 7-colour jump change (Red -> Green -> Yellow -> Blue -> Purple -> Cyan -> White)
 STROBE: White (fade-in/fade-out)
 FADE: 7-colour gradual change (Red -> Yellow -> Green -> Cyan -> Blue -> Purple -> White)
 SMOOTH: 3-colour jump change (Red -> Green -> Blue)
 UP / LED Intensity: brightens static colours; increases speeds change in transitional functionality (long press [press + hold] for a faster stepping up)
 DOWN / LED Intensity: decreases brightness in static colours; slows down speed change in transitional functionality (long press [press + hold] for a faster stepping down)

These instructions do not claim to cover all details or variations in the equipment, procedure, or process described, nor to provide directions for meeting every possible contingency during installation, operation or maintenance. When additional information is desired to satisfy a problem not covered sufficiently for user's purpose, please call the technical support toll free number listed below.

CAUTION: No user serviceable parts inside. Do not attempt repairs.

ON : Pilote (ouvrir).
 OFF : Pilote (fermer).
 DEL rouge : change la couleur à rouge statique.
 DEL vert : change la couleur à vert statique.
 DEL bleu : change la couleur à bleu statique.
 DEL blanc : change la couleur à blanc statique.
 Spectre de couleur à DEL : change la couleur à une couleur statique indiquée par le bouton.
 ÉCLAT : changements de 7 couleurs (sautantes) (rouge -> vert -> jaune -> bleu -> mauve -> cyan -> blanc)
 STROBE : blanc (foncé à pâle/pâle à foncé)
 DÉCOLORER : changement de couleur graduel (rouge -> jaune -> vert -> cyan -> bleu -> mauve -> blanc)
 HARMONIEUX : changement par saut de 3 couleurs (rouge -> vert -> bleu)
 En haut-Intensité DEL : fait briller les couleurs statiques, augmente la vitesse durant le fonctionnement (presser longtemps (presser + retenir) pour augmenter la vitesse.
 Vers le bas-Intensité DEL : baisse la brillance des couleurs statiques, ralentit la vitesse de changement de couleurs durant le fonctionnement (presser longtemps (presser + retenir) pour ralentir plus vite.

Ces instructions ne prétendent pas couvrir tous les détails ni toutes les variations de l'équipement, des directives ou du procédé décrit, ni de parer à tout éventualité qui pourrait survenir pendant l'installation, le fonctionnement ou l'entretien. Si des renseignements supplémentaires sont requis pour remédier à un problème non suffisamment couvert aux fins de l'utilisateur, prière notre représentant de soutien technique au numéro ci-dessous.

MISE EN GARDE : Aucun utilisateur ne doit faire l'entretien ou la réparation des parties à l'intérieur. N'essayez pas de réparer.