


**JCR - FIBERLINE™ SERIES**

- Only for Use in Approved Enclosed Halogen Fixtures
- Focused Beam for Optical Applications
- 50mm Dichroic Coated Reflector
- 2-Pin Base - GU5.3
- Universal Burn Position

Watts	Ushio Ordering Code	Ushio Lamp Description	Dimension MOL (A)	Reflector Type	Filament Type	Working Distance (mm)	Luminous Flux* lm	Color Temp K	Avg Life h	Burn Position
<b>FIBERLINE™ 2-Pin Base – GU5.3</b>										
50	1003125	JCR12V-50W/FO, ENL/HO	44.9	Specular	C-8	40.0	360	3000	4000	Univ
75	1003239	JCR12V-75W/FO	44.9	Specular	C-8	40.0	500	3000	3500	Univ

\* In 13mm fiber (fill factor 100)

The **Fiberline™** MR-16 lamps have the high luminous output and long lifetime needed for fiber illuminators and other optical applications. The filaments and elliptical reflectors are precision aligned for optimal light concentrations into an optical aperture or fiber bundle. The UV cut quartz capsule reduces damage to synthetic fibers or optical elements in the fixture.

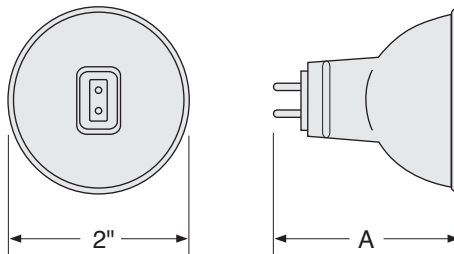

GU5.3