

SPECIFICATION

NEXLEDS®
NEXLEDS LTD



3 CCT
Changeable
3000K 4000K 5000K

VIDEO



0°~90°
Adjustable

ADJUSTABLE LED Wall Pack Light

NX-FCWP-80W-X-DV-F

Specification

PRODUCT NAME :	LED Adjustable Wall Pack
MODEL NO. :	NX-FCWP-80W-X-DV-F
SPECIFICATION :	AC120-347V; 50/60Hz; 740mA; 80W-60W-40W
WORKING TEMP :	-40°C-45°C
POWER FACTOR :	0.9
CRI(RA) :	>70
HOUSING COLOR :	Grey
LIGHT SOURCE :	Luminus SMD 2835 Chip
LUMEN :	10400 lm
LIFE TIME :	50000 hrs
BEAM ANGLE :	100°115°
ADJUSTABLE ANGLE:	0°~90°
PRODUCT SIZE :	9.25"×8.46"×6.1" inch
IP :	IP65
APPLICATION :	Park, Warehouse, Factory and so on
WARRANTY :	5 years
STANDARD :	UL, DLC
DIMMABLE:	0-10V dimming
COLOR TEMP :	3000K-4000K-5000K Changeable



www.nexleds.ca



Email: sales@nexleds.ca

NEXLEDS®


NEXLEDS LTD

Feature:


- Aesthetic, utility appearance, and patented;
- Optically designed PC cover, almost no dark macula, which makes the whole lamp emit light evenly and meets the requirements of DLC Premium 5.1;
- Adopt high light transmission and anti-UV PC lampshade;
- Low-voltage light control sensor can be installed, which is safe and reliable;
- Power and CCT selective are available to meet the different needs of customers and reduce the inventory pressure ;
- Easy and fast installation , and traditional junction box installation method is retained;
- Standard respirator extends the service life of lamps;
- IP65, completely waterproof and dustproof;
- Adjustable angle from 0-90°;
- 120-347V power supply;
- 0-10V dimming.



Dimension:

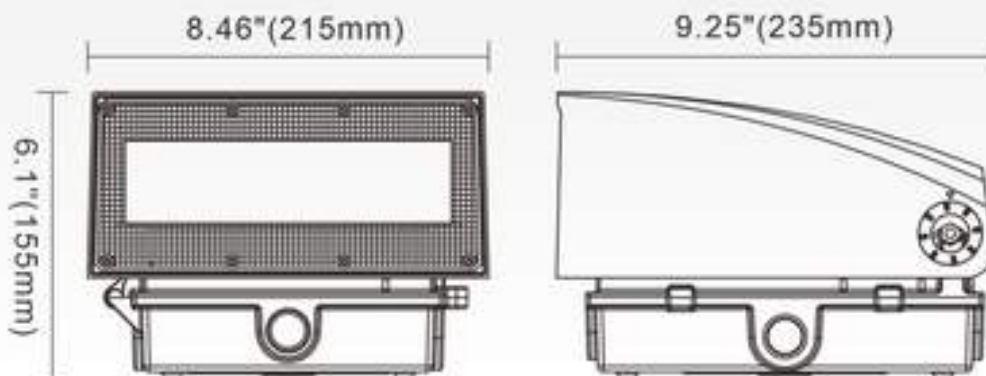

IES Report:

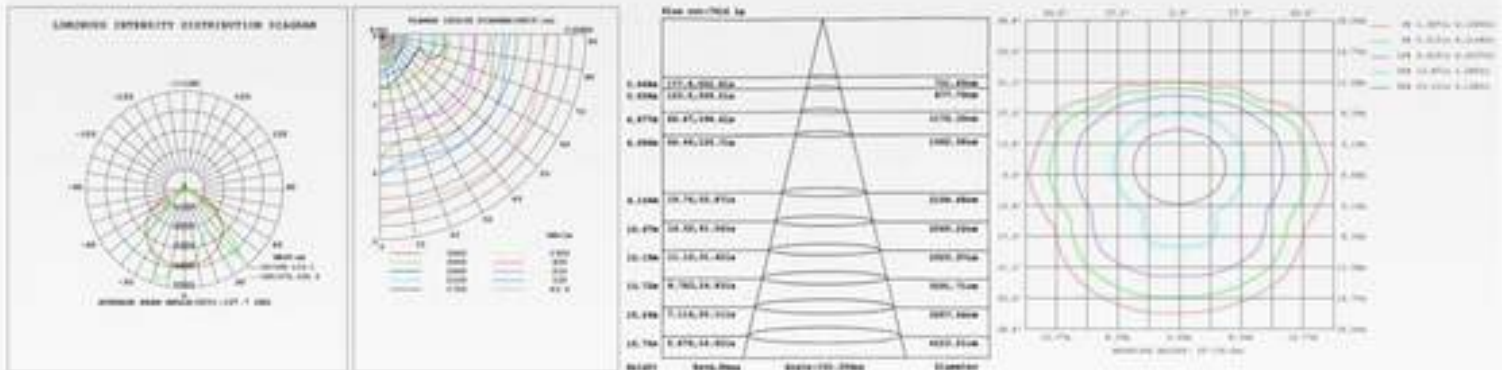

Applications:



Safety Information:

1. Using the standard working voltage: AC120~347V, AC277-480V, 50/60Hz, do not exceed.
2. Be sure the power supply is turned off before installation.
3. Switch off power of the mains supply or the connection lead respectively before doing any works.
4. Please note waterproof, dustproof, electricity prevention and shockproof for the external power wires.
5. Be sure the connection between the wires is in good condition when install the lamps, beware of leakage.
6. Please read the specification carefully before installation.
7. The complete installation must be handled by an electrical expert. 80/60/40W Tunable.

