

USHIO

LED LAMPS

U-LED SERIES



LED DECORATIVE CANDLE & GLOBE LAMPS

U-LED's unique filament LED design breaks new ground in the field of seamless LED integration. During the first generation of LED replacement lamps consumers were told that they would have to get used to a new look for decorative lamps and abandon the old style decorative lamps they had come to love over the years. Well, not anymore!

USHIO America proudly introduces U-LED, a unique LED candle and globe lamp configuration designed to replicate the appearance of incandescent filament lamps. This ground-breaking LED design makes it hard to distinguish between a U-LED lamp and an incandescent candle or globe because the LED's are configured like a traditional incandescent filament mount. There are no visible circuit boards or chips. These candelabra base (E12) lamps consume less than 1 watt of energy and have a life rating of 40,000 hours, making them ideal for decorative chandeliers and ornamental fixtures.

Available in 120V candle, globe and mini-globe shapes.

FEATURES & BENEFITS

- Innovative LED filament design – Replicates the appearance of an incandescent filament lamp
- No visible circuit boards or chips – Doesn't look like an LED lamp
- Clear bulb glass – Doesn't hide the LEDs behind frosted glass
- Energy saving - Save dramatically on energy costs compared to incandescent lamps
- Long life – 40,000 hour average life
- No Mercury or Lead
- No UV or IR


APPLICATIONS

- Chandeliers in Banquet Halls, Hotels, Retail Establishments
- Ornamental Fixtures
- High-End Residential / Commercial Decorative Lighting
- Marquees and Signs




CHARACTERISTICS & SPECIFICATIONS


U-LED CANDLE & GLOBE FILAMENT LED LAMPS

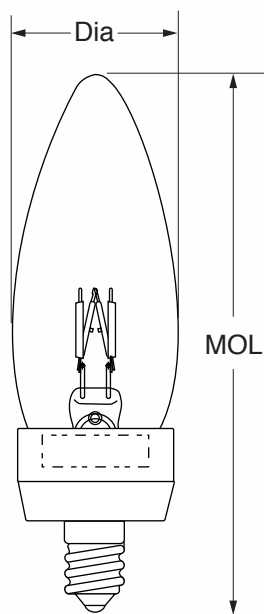

U-LED CANDLE / E12

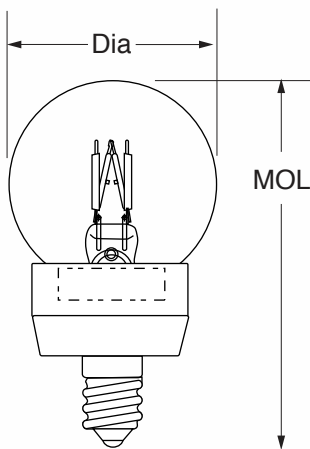

U-LED GLOBE / E12

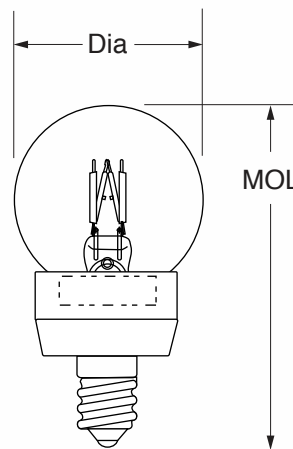

U-LED MINI-GLOBE / E12

Watts (W)	Ushio Ordering Code	Ushio Lamp Description	Volts (V)	Dimensions			Color Temp (K)	Approx Lumens (lm)	Avg Life (h)
				Dia (in)	MOL (mm)	MOL (in)			
0.6	N/A	U-LED Candle	120	1.26	101.1	3.98	2700	36	40,000
0.6	N/A	U-LED Globe	120	1.97	76.2	3.00	2700	36	40,000
0.6	N/A	U-LED Mini-Globe	120	1.57	67.1	2.64	2700	36	40,000

Distributed by:

Form No. S-ULED-0510: The specifications on this sheet supercede all previously published specifications and may be subject to change for design and specification improvement without prior notice.

© 2010 USHIO America, Inc. All rights reserved.