

ULTRA-L™ SERIES LONG COMPACT FLUORESCENT

- Energy Efficient
- Unique Size
- Long Life
- Universal Burn Position
- 82 CRI - Color Rendering Index


Please See Safety & Handling Instructions on Page 90.



Watts	Ushio Ordering Code	Ushio Lamp Description	Dimensions		Luminous Flux		Color Temp K	Avg Rated Life* h	Commercial Life** h	Case Qty
			MOL (mm)	MOL (in)	Nom lm	Min lm				
ULTRA-L™ 4-Pin Base – 2G11 (Sold in Case Quantity only)										
18	3000398	CF-L18SE/830	229	9.0	1250	1075	3000	12000	15500	10
40	3000411	CF-L40SE/830	572	22.5	3150	2709	3000	12000	15500	10
40	3000412	CF-L40SE/835	572	22.5	3150	2709	3500	12000	15500	10
40	3000413	CF-L40SE/841	572	22.5	3150	2709	4100	12000	15500	10
55	3000414	CF-L55SE/830	531	20.9	4800	4128	3000	12000	15500	10
55	3000415	CF-L55SE/835	531	20.9	4800	4128	3500	12000	15500	10
55	3000416	CF-L55SE/841	531	20.9	4800	4128	4100	12000	15500	10

All dimensions shown in inches unless otherwise noted.
 * Based on ANSI / IESNA standards of 3 hours per start
 ** Based on estimated commercial operating standards of 12 hours per start

These lamps are designed to operate on instant start or rapid start ballasts. When using dimmers, dimming systems, or occupancy sensors, the lamp life will also be affected. The dimming system manufacturer can advise the affect of their system on lamp life.

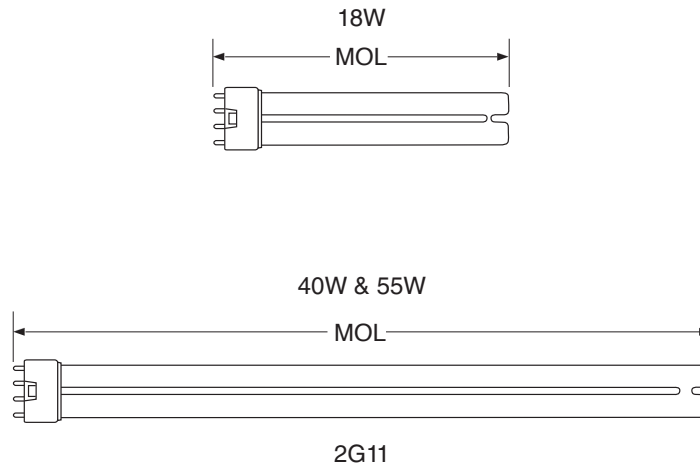

Hg - LAMP CONTAINS MERCURY
 Manage in Accord with Disposal Laws
 See: www.lamprecycle.org