

## SmartMate

# SMARTMATE ELE BAL (2) 13W CFL (4-PIN) 120-277V KIT

Offering maximum versatility, the Philips Advance family of SmartMate ballasts for 4-pin compact fluorescent lamps drive a broad range of quad and triple-tube, circline, 2D, and long twin-tube lamps.

SmartMate ballasts' energy efficient design, compact and lightweight housing, and user-friendly features make these ballasts an ideal choice for fixture manufacturers, retrofitters, and MRO replacement.

#### Product data

#### • General Characteristics

Lamp Type CFQ13W/G24Q Number of Lamps 1/2 piece Input Voltage 120-277 V Line Frequency 50/60 Hz Ballast Type Electronic Fluorescent Base Model ICF2S13H1LD Housing Housing Dimensions 4.98" x 2.4" x 0.98" Metal/Plastic Housing Material Suitable for Outdoor

Starting Method Programmed Start
Family Name Programmed Start
SmartMate

#### • Operating Characteristics

Automatic restart Yes Ignition time 1.5 s Input Power Gear 29-29 W Ballast factor 1 - Ballast Efficacy Factor 0.98 Lamp Current Crest 7- Sound Rating A

Sound Rating A Max THD 10 %

#### Wiring Characteristics

Color input terminals BLK & WHT Color output terminals RED, YEL & BLU nals

Connector type Poke-In
Wire Striplength 0.375 mm
Lamp Connection Series
Wire Gauge 18AWG

Wire Length by No wires Color Solid Wire Type Allowed Wiring Yes Config(Remote) Allowed Wiring Yes Config(Tandem) Allowed Wiring Yes Config(Through) 1-L = 15' / 2-L = 6' Max Dist. Ball to Lamp(Remote) Max Dist. Ball to 2-L: Red = 6'Lamp(Tandem) Max Dist.Ball to 2-L: Red = 6'Lamp(Through)

### • System Chars on driver level

Rated Lamp Watts 13W

#### • Temperature Characteristics

T-case maximum 75 C

#### Product Dimensions

Length A1	4.60 in
Length A2	4.20 in
Length A3	2.00 in
Width B1	3.00 in
Height C1	1.29 in

## Approval & Application Chars

EMC Immunity FCC Non-Consumer Approbation Marks UL, CSA, RoHS UL Listed Yes




## **SmartMate**

CSA certificate	Yes
CEC Listing	Yes
CEE Rated	No
Circle E logo	No
CSA E	No
cUL certificate	No
DOE	No
Energy Star	No
FIDE Certificate	No
NEMA Premium	No
NOM certificate	Yes
RoHS Compliant	Yes
SASO Certificate	No
UL Recognized	No

#### • Product Data

Product number ICF2S13H1LDK ELE BAL (2) 13W CFL (4-PIN) 120-277V KIT Full product name ELE BAL (2) 13W CFL (4-PIN) 120-277V KIT Short product name Pieces per Sku eop\_pck\_cfg Skus/Case 12 12 781087102916 30781087117751 Bar code on pack Bar code on case Logistics code(s) 913700500811 0.250 kg eop\_net\_weight\_pp

## Dimensional drawing

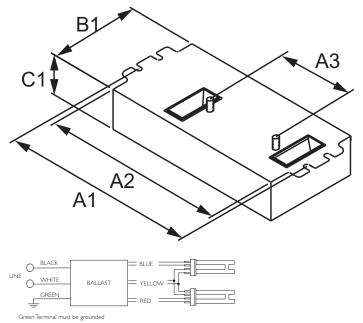

## SMARTMATE ELE BAL (2) 13W CFL (4-PIN) 120-277V KIT

Product	A1 (Norm)	A2 (Norm)	A3 (Norm)	B1 (Norm)	C1 (Norm)
ELE BAL (2) 13W CFL (4-PIN)	4.60	4.20	2.00	3.00	1.29
120-277V KIT					



© 2014 Koninklijke Philips N.V. (Royal Philips) All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.