

# SmartMate

# SMARTMATE ELE BAL (2) 18W CFL (4-PIN) 120-277V

Offering maximum versatility, the Philips Advance family of SmartMate ballasts for 4-pin compact fluorescent lamps drive a broad range of quad and triple-tube, circline, 2D, and long twin-tube lamps. SmartMate ballasts' energy efficient design, compact and lightweight housing, and user-friendly features make these ballasts an ideal choice for fixture manufacturers, retrofitters, and MRO replacement.

#### Product data

#### • General Characteristics

Lamp Type CFQ18W/G24Q Number of Lamps 1/2 piece Input Voltage 120-277 V Line Frequency 50/60 Hz Ballast Type Electronic Fluorescent Base Model ICF2S18H1LD Housing Housing Dimensions 4.98" x 2.4" x 0.98" Metal/Plastic Housing Material Suitable for Outdoor **Programmed Start** Starting Method

SmartMate

• Operating Characteristics

Family Name

Automatic restart Yes Ignition time 1.5 s 35-35 W Input Power Gear Ballast factor 0.95 -Ballast Efficacy Factor 2.71 -Power Factor 0.98 Lamp Current Crest 1.5 -Factor

Sound Rating

Max THD 10 %

#### • Wiring Characteristics

Color input terminals **BLK & WHT** RED, YEL & BLU Color output terminals

Connector type Poke-In Wire Striplength 0.375 mm Lamp Connection Series Wire Gauge 18AWG

Wire Length by No wires Color Solid Wire Type Allowed Wiring Yes Config(Remote) Allowed Wiring Yes Config(Tandem) Allowed Wiring Yes Config(Through) 1-L = 15' / 2-L = 6' Max Dist. Ball to Lamp(Remote) Max Dist. Ball to 2-L: Red = 6' Lamp(Tandem) Max Dist.Ball to 2-L: Red = 6'Lamp(Through)

#### • System Chars on driver level

Rated Lamp Watts 18W

#### • Temperature Characteristics

T-case maximum 75 C

#### • Product Dimensions

Length A1 4.60 in Length A2 4.20 in Length A3 2.00 in Width B1 3.00 in Height C1 1.29 in

#### • Approval & Application Chars

FCC Non-Consumer **EMC** Immunity Approbation Marks UL, CSA, RoHS UL Listed Yes




## **SmartMate**

CSA certificate	Yes
CEC Listing	Yes
CEE Rated	No
Circle E logo	No
CSA E	No
cUL certificate	No
DOE	No
Energy Star	No
FIDE Certificate	No
NEMA Premium	No
NOM certificate	No
RoHS Compliant	Yes
SASO Certificate	No
UL Recognized	No

#### • Product Data

Product number ICF2S18H1LDK ELE BAL (2) 18W CFL (4-PIN) 120-277V KIT Full product name ELE BAL (2) 18W CFL (4-PIN) 120-277V KIT Short product name Pieces per Sku eop\_pck\_cfg Skus/Case 12 12 781087102909 Bar code on pack 30781087117768 Bar code on case Logistics code(s) 913700500821 0.250 kg eop\_net\_weight\_pp

## Dimensional drawing

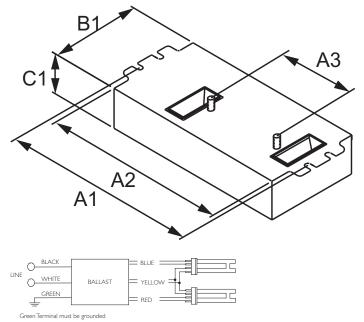

#### SMARTMATE ELE BAL (2) 18W CFL (4-PIN) 120-277V KIT

Product	A1 (Norm)	A2 (Norm)	A3 (Norm)	B1 (Norm)	C1 (Norm)
ELE BAL (2) 18W CFL (4-PIN)	4.60	4.20	2.00	3.00	1.29
120-277V KIT					



© 2014 Koninklijke Philips N.V. (Royal Philips) All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.