

Centium T5HO

CENTIUM ELE BALLAST (2) F54/T5HO 120-277V

No matter what the conditions require, operating at a variety of line voltages between 120V to 480V, whether located in high ambient temperature environments (requiring a 90° C rating) or not, our family of Philips Advance Centium ballasts are ideal for a wide variety of applications.

Product data

General Characteristics

Lamp Type F54T5/HO Number of Lamps 1/2 piece Input Voltage 120-277 V Line Frequency 50/60 Hz Ballast Type Electronic Fluorescent Base Model ICN2S5490CT Housing Т Housing Dimensions 14.17" x 1.18" x 1.06" Metal Housing Material Suitable for Outdoor Yes use? Starting Method Programmed Start Family Name Centium

• Operating Characteristics

Automatic restart	Yes
Ignition time	1.5 s
Input Power Gear	120-117 W
Ballast factor	1 -
Ballast Efficacy Factor	0.83 -
Power Factor	0.98
Lamp Current Crest	1.7 -
Factor	
Sound Rating	А
Max THD	10 %

• Wiring Characteristics

Color input terminals Color output termi- nals	BLK & WHT RED, YEL & BLU		
Connector type	Poke-In		
Wire Striplength	0.375mm		
Lamp Connection	Series		
Wire Gauge	18AWG		

Wire Length by	No wires
Color	
Wire Type	Solid
Allowed Wiring	Yes
Config(Remote)	
Allowed Wiring	Yes
Config(Tandem)	
Allowed Wiring	Yes
Config(Through)	
Max Dist. Ball to	20'
Lamp(Remote)	
Max Dist. Ball to	Blue = 20'
Lamp(Tandem)	
Max Dist.Ball to	Blue = 20'
Lamp(Through)	

• System Chars on driver level

Rated Lamp Watts 54W

• Temperature Characteristics

T-case maximum	90 C
----------------	------

• Product Dimensions

Length A1	14.17 in
Length A2	13.78 in
Width B1	1.18 in
Height C1	1.06 in

• Approval & Application Chars

EMC Immunity Approbation Marks UL Listed CSA certificate FCC Non-Consumer UL, CSA, RoHS Yes Yes




Centium T5HO

CEC Listing	No
CEE Rated	No
Circle E logo	No
CSA E	No
cUL certificate	No
DOE	No
Energy Star	No
FIDE Certificate	No
NEMA Premium	No
NOM certificate	No
RoHS Compliant	Yes
SASO Certificate	No
UL Recognized	No

• Product Data

Product number Full product name	ICN2S5490CT35M ELE BALLAST (2) F54/T5HO 120-277V
Short product name	ELE BALLAST (2) F54/T5HO 120-277V
Pieces per Sku	1
Skus/Case	18
Bar code on pack	781087131824
Bar code on case	50781087131836
Logistics code(s)	913701253402
eop_net_weight_pp	0.441 kg

Dimensional drawing

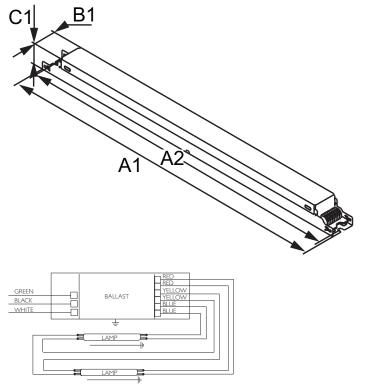

CENTIUM ELE BALLAST (2) F54/T5HO 120-277V

Product	A1 (Norm)	A2 (Norm)	A3 (Norm)	B1 (Norm)	C1 (Norm)
ELE BALLAST (2) F54/T5HO 120-277V	14.17	13.78	-	1.18	1.06



 $\ensuremath{\mathbb{C}}$ 2014 Koninklijke Philips N.V. (Royal Philips) All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting