

UR226347MHT-BL



BL= Bottom Lead

| | | | |
|-------------------------|---------------|------------------------------|------------------|
| Ballast Type: | Electronic | Starting Method: | Programmed Start |
| Lamp Connection: | Series | Input Voltage: | 277 to 347 |
| Input Frequency: | 50/60 Hz | Sound Rating: | A |
| Remote Mounting: | 10 ft Maximum | Warranty: | Three Years |
| EOL Protection: | Yes | Max Case Temperature: | 70°C |

ELECTRICAL SPECIFICATIONS

| Lamp Type | # of Lamps | Rated Lamp Watts | Min. Start Temp. (°F/°C) | Input Current (Amps) | Input Power (Watts) | Ballast Factor | Max THD % | Power Factor | Max L.C.C.F. | B.E.F |
|-----------|------------|------------------|--------------------------|----------------------|---------------------|----------------|-----------|--------------|--------------|-------|
| CFL 26W | 1 | 26 | -20/-29 | 0.11 / 0.08 | 28 | 1.02 | 10 | 0.99 | 1.5 | 3.64 |
| | 2 | | | 0.20 / 0.16 | 54 | 0.98 | | | | 1.81 |
| CFL 32W | 1 | 32 | | 0.13 / 0.10 | 34 | 1.00 | | | | 2.94 |
| CFL 42W | 1 | 42 | | 0.16 / 0.13 | 44 | 1.00 | | | | 2.27 |
| 2D 28W | 1 | 28 | | 0.11 / 0.09 | 30 | 1.00 | | | | 3.33 |
| FT 24W | 1 | 24 | | 0.10 / 0.08 | 26 | 0.95 | | | | 3.65 |
| | 2 | | | 0.18 / 0.15 | 50 | 0.90 | | | | 1.80 |
| FT36W | 1 | 36 | | 0.14 / 0.11 | 38 | 0.90 | | | | 2.37 |
| FT39W,40W | 1 | 40 | | 0.16 / 0.13 | 42 | 0.90 | | | | 2.14 |

REGULATORY COMPLIANCE

- Meets ANSI Standard C82.11
- Meets ANSI Standard C62.41
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)

- No PCB's
- cULus Listed (Class P, Type 1 Outdoor, Type HL)



ULTRASAVE LIGHTING LTD.

12-140 AMBER STREET, MARKHAM, ON L3R 3J8

TEL 905.940.0888


FAX 905.940.0338

WWW.ULTRASAVE.CA

Data published here is based on the result of a test under a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. H2911USL

PHYSICAL CHARACTERISTICS


WIRING DIAGRAM

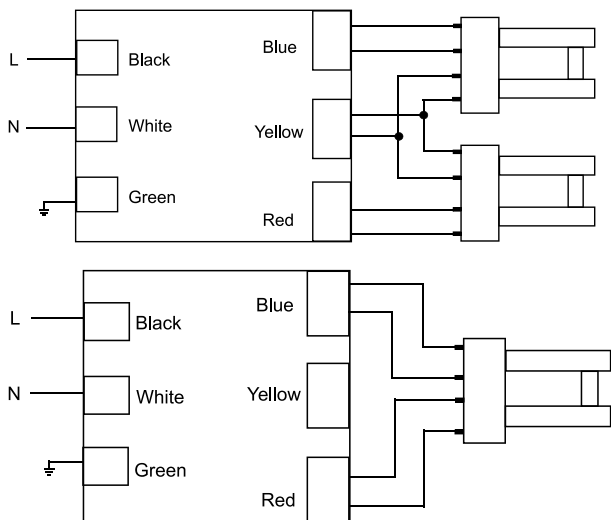

CASE DIMENSIONS

| | |
|---------------------|-------|
| Overall (L) | 4.56" |
| Width (W) | 2.45" |
| Height (H) | 1.16" |
| Mounting (M) | 2.00" |

HOT SPOT LOCATION

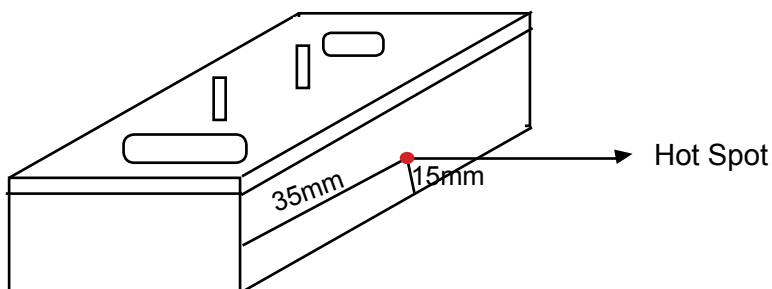

ORDERING INFORMATION

| Model # | Carton Weight | Carton Dimensions LxWxH | Carton Quantity | Skid Quantity |
|----------------|---------------|-------------------------|-----------------|---------------|
| UR226347MHT-BL | 14.40 lbs | 13.19" x 10.04" x 4.33" | 20 | 1000 |

ULTRASAVE LIGHTING LTD.

12-140 AMBER STREET, MARKHAM, ON L3R 3J8

TEL 905.940.0888

FAX 905.940.0338

WWW.ULTRASAVE.CA

Data published here is based on the result of a test under a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. H2911USL