

ER235120MHT-W



Ballast Type:	Electronic	Starting Method:	Programmed Start
Lamp Connection:	Series	Input Voltage:	120 to 277
Input Frequency:	50/60 Hz	Sound Rating:	A
Remote Mounting:	18 ft Maximum	Warranty:	Five Years
End-of-Life Protection:	Yes	Max. Case Temperature:	90°C

ELECTRICAL SPECIFICATIONS

Lamp Type	# of Lamps	Rated Lamp Watts	Min. Start Temp. (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	Max THD %	Power Factor	Max. L.C.C.F.	B.E.F
T5 28W	1	28	-20 / -29	0.30 / 0.12	33	1.06	10	0.99	1.70	3.21
	2			0.54 / 0.23	64	1.00				1.56
T5 35W	1	35		0.38 / 0.16	45	1.03				2.29
	2			0.74 / 0.32	87	0.98				1.13

REGULATORY COMPLIANCE

- Meets ANSI Standard C82.11
- Meets ANSI Standard C62.41
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)

- No PCB's
- cULus Listed (Class P, Type 1 Outdoor, Type HL)
- RoHS Compliant



ULTRASAVE LIGHTING LTD.

12-140 AMBER STREET, MARKHAM, ON L3R 3J8

TEL 905.940.0888



FAX 905.940.0338

WWW.ULTRASAVE.CA

Data published here is based on the result of a test under a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. J2607USL

PHYSICAL CHARACTERISTICS

WIRING DIAGRAM

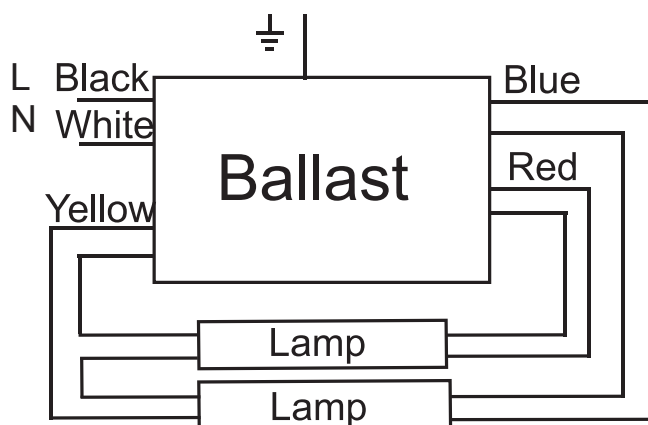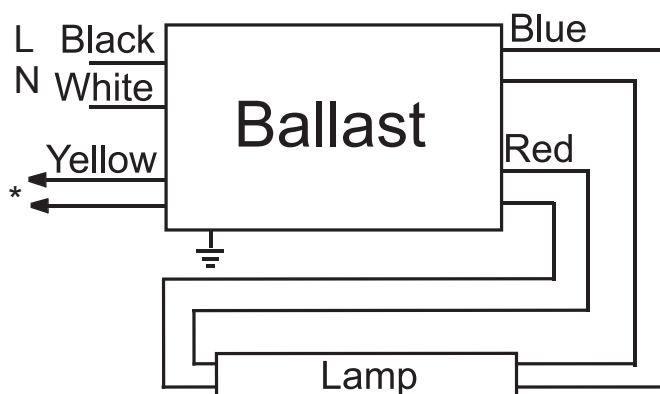

* Cap off each Yellow wire separately

LEAD LENGTH

Wire	in
Black	18
White	18
Blue	31
Red	31
Yellow	46

CASE DIMENSIONS

Overall (L)	11.50"
Width (W)	1.32"
Height (H)	1.05"
Mounting (M)	11.25"

ORDERING INFORMATION

Model #	Carton Weight	Carton Dimensions LxWxH	Carton Quantity	Skid Quantity
ER235120MHT-W	28.70	11.02" x 10.63" x 9.06"	20	1000

ULTRASAVE LIGHTING LTD.

12-140 AMBER STREET, MARKHAM, ON L3R 3J8

TEL 905.940.0888

FAX 905.940.0338

WWW.ULTRASAVE.CA

Data published here is based on the result of a test under a controlled environment. Actual performance can vary depending on operating conditions.
Specifications are subject to change without notice. J2607USL