

ighting Solutions closer to nature

DESCRIPTION

The STR LED Wraparound Retrofit is a true alternative to convert conventional fluorescent fixtures to LED. It is a one piece design that can be installed in 15 minutes and will save up to 30% energy cost over T8.

SPECIFICATION FEATURES

Construction

Die formed 22 gauge galvanized steel painted high gloss white

Controls

The STR Retrofit is powered by Ultrasave drivers that can be adjusted to different lumen packages by just changing the driver cable

Electrical

Long Life LED System complete with electrical driver to deliver the optimal performance. LED's available in a 3500K, 4000K and 5000K with a typical CRI: 80. Rated for 94,000 hours. Electronic drivers are available in 120/277 and 347 Volt applications

Driver and Module Access

Drivers can be accessed by removing the Retrofit from the exciting fixture and the driver is located in the underneath

Finish

22 gauge galvanized steel and high gloss enamel paint finish ensures maximum bonding and rust inhibition


Compliance

Modules and Drivers are UL recognized components and indoor luminaires are cULus listed

Warranty

5 years



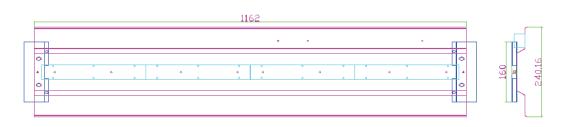

 $\begin{array}{l} \textbf{STR40LED02} \ / \ \textbf{STR40LED04} \\ \textbf{Dimension} \\ mm \ | \ 1162(L) \times 240(W) \times 27(D) \\ inch \ | \ 46"(L) \times 9"(W) \times 1"(D) \\ \end{array}$







ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Delivered Lumens (Im)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Efficacy (Im/W)	Status
	STR40LED04	4410 4410 3240 2250	42 42 31 22	120M / 347 120M / 347 120M / 347 120M / 347	4000K 3500K / 5000K 3500K / 4000K / 5000K 3500K / 4000K / 5000K	105 99 / 110 99 / 104 / 110 97 / 102 / 107	Stock MTO MTO MTO
*	STR40LED02	3000 3000	31 31	120M / 347 120M / 347	4000K 3500K / 5000K	96 91 / 100	Stock MTO

*STR40LED02 has 2 modules only.

OPTIONAL ACCESSORIESDimming Drivers (D) 120M/347V

SHIPPING DATA Model No. STR40LED04 STR40LED02

Weight 2.8kg / 6.2lbs 2.1kg / 4.7lbs

