

DESCRIPTION

The EEL LED Wall Pack is IP54 rated and it offers maximum light output for general purpose area and security lighting through a classic refractor design. This versatile luminaire is ideal to match the same existing design.

SPECIFICATION FEATURES

Construction

Die-cast aluminum housing

Finish

Cast aluminum powder coated bronze

Controls

The LED Wall Pack is powered by Ultrasave Drivers and Modules

Shielding

The borosilicate glass lens provides classic design

Electrical

Long Life LED System complete with electrical driver to deliver the optimal performance. LED's available in a 3500K, 4000K and 5000K with a typical CRI: 80. Rated for 94,000 hours. Electronic drivers are available in 120/277 and 347 Volt applications

Compliance

Modules and Drivers are UL recognized components and the luminaire is cULus listed

Warranty

5 years



Driver and Module Access

Drivers can be accessed by unscrewing the glass frame and swinging it open



**LED
WALL PACK**

powered by
ULTRASAVE

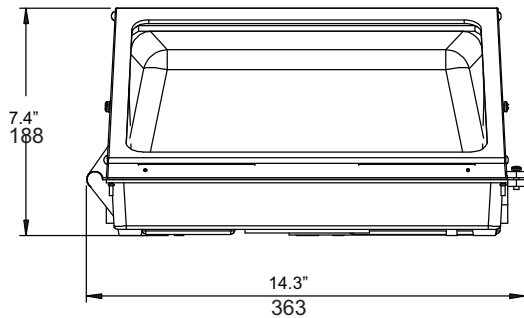

WHLF6-40LED06

Dimension

mm | 363(L) x 231(W) x 188(D)
inch | 14.3"(L) x 9.1"(W) x 7.4"(D)

ORDERING CODE, ENERGY AND PERFORMANCE DATA



Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Efficacy (lm/W)	Status
WHLF6-40LED06	3300 3300	31 31	120M / 347 120M / 347	4000K 3500K / 5000K	106 99 / 110	Stock MTO

SHIPPING DATA

Model No.
WHLF6-40LED06

Weight
4.5kg / 10lbs



Energy Efficient Lighting Company Limited
331 Amber Street, Unit B, Markham, ON L3R 3J7 Canada
Tel: 905-415-8878 • 1-855-415-8878 | Fax: 905-415-8872 • 1-855-415-8872
Email: marketing@eelighting.ca | URL: www.eelighting.ca

Specifications and dimensions subject to change without notice.
Consult your Energy Efficient Lighting Representative
for availability and ordering information.