





21811 - 5" ARCHITECTURAL LED RECESSED

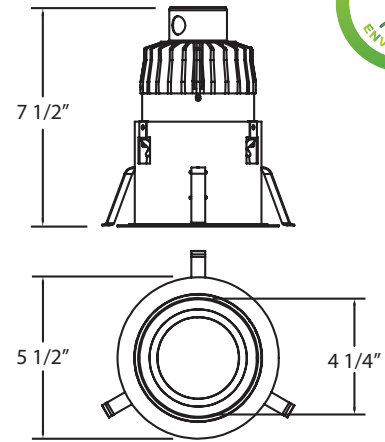

- DIMMABLE LED DRIVER INCLUDED
- RETROFIT NON-IC

24W LED



h(m)	D(m)	E(lx)
30°		
0.5	0.288	10500
1	0.576	2625
2	1.153	656
3	1.73	291
4	2.307	164

Model	Finishes	Lumen	LED Kelvin	LED Life	Current	Cut Hole Size	Beam Angle	CRI	Lamping
21811	-012 White	2000 (lm)	3000K	50,000 (h)	1400 (mA)	4 3/4"	30°	85+	24W BRIDGELUX LED



* For new construction and insulated ceiling housing information, please consult factory.

