



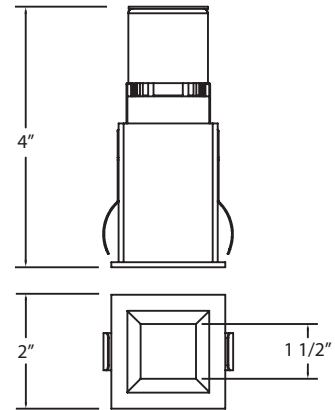



23284 - 2" SQUARE MINI ARCHITECTURAL LED RECESSED

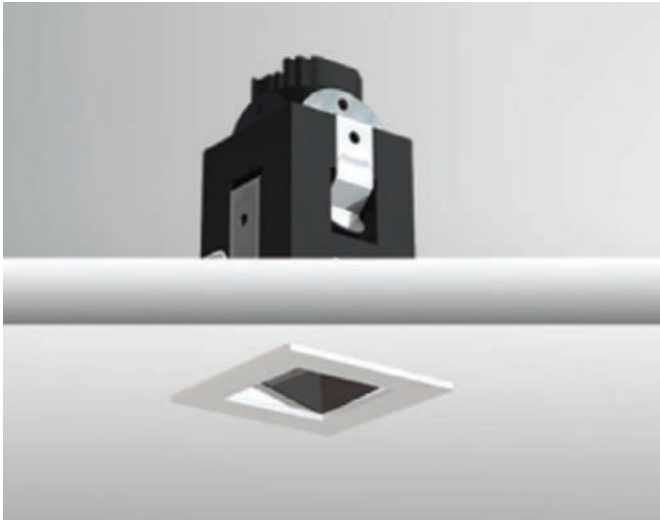

- DIMMABLE LED DRIVER INCLUDED
- RETROFIT NON-IC

Model	Finishes	Lumen	LED Kelvin	LED Life	Current	Cut Hole Size	Beam Angle	CRI	Lamping
23284	-012 White	114 (lm)	3000K	50,000 (h)	350 (mA)	1 3/4" x 1 3/4"	40°	85+	1W BRIDGELUX LED

21968 - 4" SQUARE ARCHITECTURAL LED RECESSED

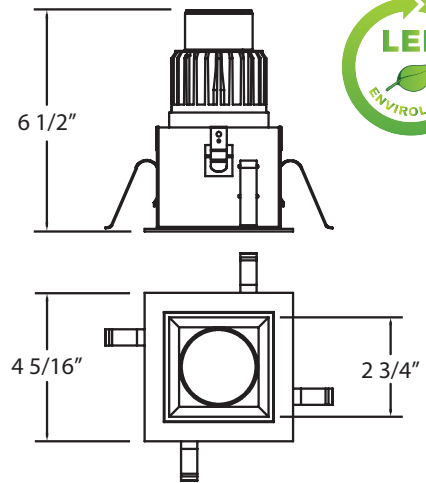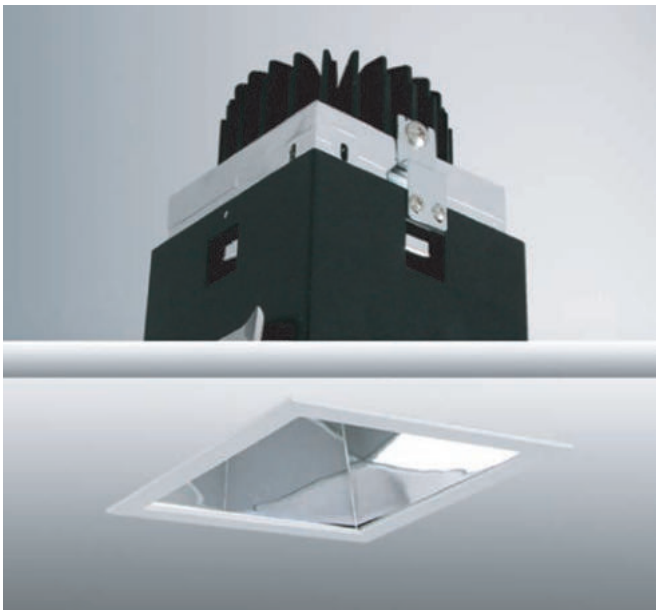

- DIMMABLE LED DRIVER INCLUDED
- RETROFIT NON-IC

13W LED

h(m)	D(m)	F(lx)
	40"	
0.5	0.403	4164
1	0.807	1041
2	1.615	260
3	2.423	115
4	3.231	65

Model	Finishes	Lumen	LED Kelvin	LED Life	Current	Cut Hole Size	Beam Angle	CRI	Lamping
21968	-013 White	930 (lm)	3000K	50,000 (h)	700 (mA)	3 3/4" x 3 3/4"	40°	85+	13W BRIDGELUX LED