





23283 - 2" MINI ARCHITECTURAL LED RECESSED

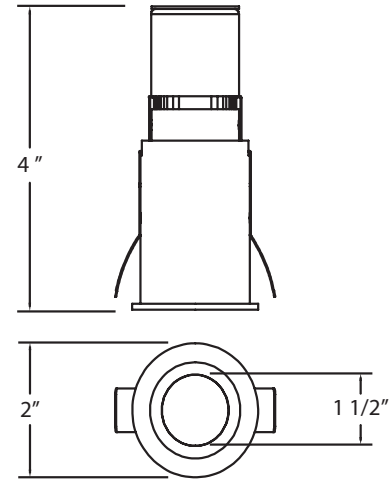

- DIMMABLE LED DRIVER INCLUDED
- RETROFIT NON-IC

Model	Finishes	Lumen	LED Kelvin	LED Life	Current	Cut Hole Size	Beam Angle	CRI	Lamping
23283	-015 White	114 (lm)	3000K	50,000 (h)	350 (mA)	1 3/4"	40°	85+	1W BRIDGELUX LED

21809 - 4" ARCHITECTURAL LED RECESSED

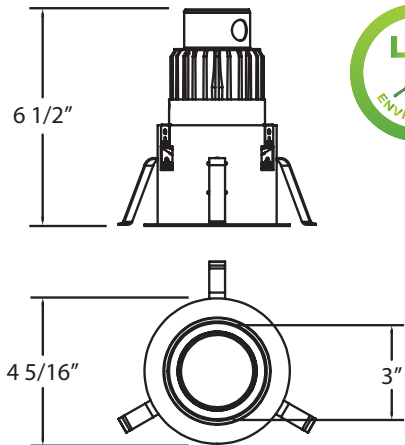

- DIMMABLE LED DRIVER INCLUDED
- RETROFIT NON-IC

13W LED

	h(m)	D(m)	F(lx)
		40"	
0.5	0.403	4164	
1	0.807	1041	
2	1.615	260	
3	2.423	115	
4	3.231	65	

Model	Finishes	Lumen	LED Kelvin	LED Life	Current	Cut Hole Size	Beam Angle	CRI	Lamping
21809	-019 White	930 (lm)	3000K	50,000 (h)	1050 (mA)	3 3/4"	40°	85+	1 X 13W LED BRIDGELUX