

LED Canopy Light

Fotonz Inc.

Project Name: _____

Catalog Name: _____

Voltage: _____

Notes: _____

Fixture Schedule: _____


Product Description:

The Design Lights Consortium®-qualified energy-efficient LED Ceiling Canopy Fixtures are designed for Parking garage, gas station, and warehouse. 40- and 60-watt model LED fixtures are energy-efficient replacements for 175- and 250-watt metal halide fixtures. The LED Ceiling Canopy Fixtures provide excellent light and continuous energy savings for up to 50,000 hours.



Features:

- High Power Factor >0.98
- Uniformed and Consistent Color
- Voltage: 120V-277V, 347V is available
- Environment Temperature -20° to 50°
- Environment Humidity <95%
- High pressure die casting housing and anti-static powder painting
- Standard mounting connector for easy installation and low maintenance
- 5 year warranty

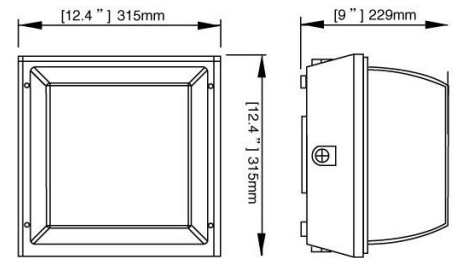

Ordering Information: Based on model number

Model	Wattage	Equivalent Wattage	Lumens	Volts	CCT
FT-CP-40W	40W	175W MH	3560	120V-277V	5000K
FT-CP-60W	60W	250W MH	5410	120V277V	5000K

Specifications:

	Specification	FT-CP-40W	FT-CP-60W
Certification	Certification	ETL, FCC, LM80, LM79, DLC	ETL, FCC, LM80, LM79, DLC
	Material Usage	RoHS compliant	RoHS compliant
	Environment	Indoor / outdoor	Indoor / outdoor
	LED Class	L70 rated to 50,000 hours	L70 rated to 50,000 hours
General Performance	Color Temperature	5000K	5000K
	Lumens	3560	5410
	Efficacy CRI	89 lumen/W ≥75	89 lumen/W ≥75
	Color Consistency	Uniform color	Uniform color
	Lumen Maintenance (L70)	50,000 hrs	50,000 hrs
Electrical	Power Factor	98%	98%
	Input Voltage	120V-277V 50/60 Hz	120V-277V 50/60 Hz
	Power Consumption	40 Watts	60 Watts
Physical	Dimensions	315x315x224mm	315x315x224mm
	N./G.W.:	5.5KG/6.5KG	5.5KG/6.5KG
	Housing	High pressure die casting housing	High pressure die casting housing
	Lens	UV stabilized plastic lens	UV stabilized plastic lens
	Mounting	Standard mounting connector	Standard mounting connector
	Operating Temperature	-20° to 50°	-20° to 50°
	Humidity	<95%	<95%