CABINET, COVE & DISPLAY • ARMOIRE, GORGE ET PRÉSENTOIR

5-METER LED TAPE • 5-MÈTRE RUBAN DEL

LED-TP7-5M

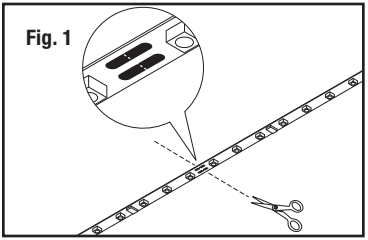

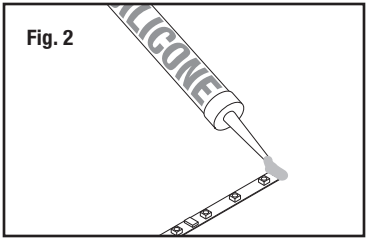

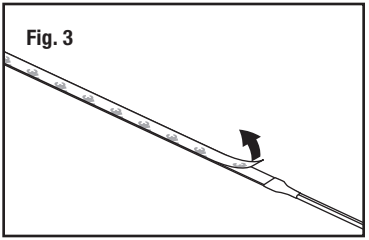

IMPORTANT: Read all instructions before installing fixtures. Retain for future reference.
SAFETY: For your safety, this fixture must be wired in accordance to local electrical codes and ordinances. All work should be done by a qualified electrician.
WARNING: Make certain power is OFF from the electrical panel before starting installation or attempting any maintenance.

INCLUDED COMPONENTS:
- 5-meter LED tape roll with DC 2.1 connector

ADDITIONAL COMPONENTS (SOLD SEPARATELY):
24V LED driver is required.
- 60W LED plug-in driver (LED-DVR-24V-60W)
- 60W LED hardwire box driver (LED-HWB-24V-60W)
- 60W Outdoor LED driver (LED-HW3-24V-60W)
- 40W LED 2-wire dimmable Lutron® driver with hardwire box (LED-HWBDIM2-24-40)
- 40W LED 3-wire dimmable Lutron® driver with hardwire box (LED-HWBDIM3-24-40)
- Power feed with bare leads to water tight connector (LED-TP-72-PF), or DC 2.1 to DC 2.1 power feed (LED-TP-72-DC-PF)

ASSEMBLY INSTRUCTIONS:
1. Open package and place all components on to a clean surface.
2. Turn power OFF from the electrical panel before starting installation.
3. The surface area where the LED tape will be applied must be cleaned from dust (etc.) to establish a firm adhesive.
4. If cutting tape to a custom length, incisions must align with the cutting line of LED tape (located every 10cm) or the cut section will not light up [Fig.1]. Incision must be sealed with silicone (not included) [Fig.2].
5. Once all positioning is confirmed, remove paper strip from the back of the LED tape and apply firmly to the desired location [Fig.3].
6. Make DC 2.1 connection to 24V constant voltage driver (sold separately) [Fig.4].
7. Rest driver to the desired secured location. Driver must be located indoors unless approved for outdoor use.
8. Once assembly is complete, turn on power to confirm fixture is working properly.

IMPORTANT : Lire toutes les instructions avant d'installer rencontre. Conserver pour référence future.
SÉCURITÉ : Pour votre sécurité, ce dispositif doivent être câblés conformément aux codes électriques locaux et des ordonnances. Tous les travaux doivent être effectués par un électricien qualifié.
AVERTISSEMENT : S'assurer est hors tension à partir du panneau électrique avant de commencer l'installation ou toute tentative de maintenance.

COMPOSANTS INCLUS :
- 5-mètre DEL compteur rouleau de ruban avec DC 2.1 connecteur

COMPOSANTS SUPPLÉMENTAIRES (VENDUS SÉPARÉMENT) :
24 V pilote à DEL est requis.
- 60W Pilote enfichable pour DEL (LED-DVR-24V-60W)
- 60W Boîte de câblage pour DEL (LED-HWB-24V-60W)
- 60W Pilote pour DEL, extérieur (LED-HW3-24V-60W)
- 40W Pilote Lutron® 2 fils d'intensité variable pour DEL avec boîte de câblage (LED-HWBDIM2-24-40)
- 40W Pilote Lutron® 3 fils d'intensité variable pour DEL avec boîte de câblage (LED-HWBDIM3-24-40)
- Fil d'alimentation avec fil nus à connecteur étanche (LED-TP-72-PF), ou fil d'alimentation CC 2.1 à CC 2.1 (LED-TP-72-DC-PF)

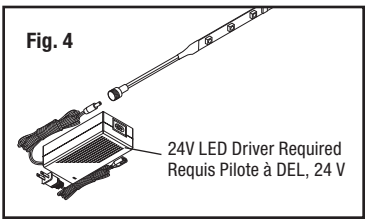

INSTRUCTIONS DE MONTAGE :
1. Ouvrez l'emballage et placer tous les composants sur une surface propre.
2. Éteignez l'alimentation du panneau électrique avant de commencer l'installation.
3. La surface où le voyant bande seront appliquées doivent être nettoyés à partir de la poussière (etc.) d'établir une entreprise adhésif.
4. Si couper la bande à une longueur personnalisée, incisions doivent s'aligner avec la ligne de coupe de DEL bande (situé tous les 10 cm) ou la coupe ne s'allume pas (Fig.1]. Incision doit être scellé avec de la silicone (non inclus) [Fig.2].
5. Une fois tous le positionnement est confirmé, retirer bande de papier à l'arrière de la bande de DEL et appliquer fermement vers l'emplacement souhaité [Fig.3].
6. Faire DC 2.1 connexion à 24 V tension contante pilote (vendu séparément) [Fig.4].
7. Reste pilote souhaité emplacement sécurisé. Pilote doit être situé à l'intérieur à moins d'être approuvée pour une utilisation en extérieur.
8. Une fois le montage terminé, mettez-la sous tension pour confirmer le dispositif fonctionne correctement.

Liteline

Liteline Corporation
Info@ liteline.com
www.liteline.com
8 Abacus Road, Brampton
Ontario, Canada L6T 5B7
416-996-1856
1-866-730-7704
905-794-1990
1-888-738-9736

REV5/11.8.13