




RMS STEEL NEW NBC2010 compliant

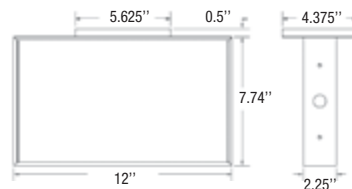

Approvals:
CSA Certified to C22.2 #141
and C860

EMERGENCY SERIES

Description

The clean lines of the series RMS of commercial steel signs present a fully modern appearance. The steel provides for a rigid, durable and lightweight sign. Available in AC only, AC/DC and internally Self-Powered versions.

Electrical external DC supply

- LED Ultra-bright light source
- 120/347VAC Input, field selectable
- 1.8 Watt power consumption single or double face
- Emergency DC wattages as follows:
6VDC = 0.9W / 12VDC = 0.9W / 24VDC = 0.9W

Electrical self-powered

- LED Ultra-bright light source
- 120/347VAC Input, field selectable
- 1.8 Watt power consumption single or double face
- High-performance, Ni-Cad battery
- 90 or 120 minutes emergency duration
- Solid state transfer panel and battery charger

Specifications

Supply and install Stanpro Steel LED Running Man sign in accordance with NBC2010, C22.2 No. 141, The equipment shall operate with universal AC input of 120/347V no more than 1.8 watts and universal DC input voltage from 6V to 24V. The housing shall be constructed of rugged steel and have a maximum depth of 2-1/4". The faceplates shall be open face type with an steel contour. The light source shall be high performing light emitting diodes (LED) and the LED lamps shall provide illumination in normal and emergency operation and shall be mounted inside the Running Man housing. A white LED sensitive dif-fuser shall be used to provide an evenly illuminated green and white legend.

The Running Man in a self powered configuration shall be equipped with a nickel cadmium batteries and shall stay illuminated during emergency operation for at least 90 minutes upon AC fail

Warranty

As always, Stanpro is Focused on Quality. For complete warranty details, please see our terms and conditions.



Come standard with three pictogram legends for direction selection.

Ordering Guide



Series	Face #	Colour	DC output	Options
RMS	0 - Universal faces 1 - Single 2 - Double	WH - White (standard) BK - Black GY - Grey SP - Custom colour (please specify)	NDC - AC only UDC - Universal DC backup voltage from 6 to 24VDC IB - Self-powered for 90 minutes IB1 - Self-powered for 120 minutes	TP, OP, PG, BO, WO, K5, Wireguard 0 - AC only <small>Note : Indicators option available for single & double option only</small>



5905 Chemin de la Côte de Liesse, Saint-Laurent, Quebec, H4T 1C3

Tel.: (514) 739-9984 • Toll Free: 1-866-280-2332 • Fax: (514) 739-9912 • www.stanpro.com

The information in this brochure is typical and must not be interpreted as a guarantee of individual product performance and/or characteristics.

Stanpro Lighting Systems Inc. follows a policy of continuous advancements in development. For this reason specifications may change without notice.

