

## CW - Wrap Fluorescent Luminaire



### BENEFIT

- 2xT8 Wraparound fluorescent luminaire for office and other interior lighting
- Universal input voltage 120-277V & 347V

### ELECTRICAL

- cULus listed, 40°C ambient environment
- Energy saving ballasts powered by Ultrasave
- 5 years warranty on ballasts

### CONSTRUCTION / FINISH

- Surface mounted low profile fixture
- Die-formed cold rolled steel finished in high gloss powder paint
- Lens is prismatic acrylic K-12

### APPLICATION


- Indoor commercial lighting: office environment, residential building public areas, lobby, etc.

### ORDERING CODE

Model Number	Description	No. of Lamp	Type of Lamp	Lamp Wattage (W)	Input Voltage (V)	System Wattage (W)
CW232120M	CW WRAP 2 LAMP 32W 120-277V	2	T8	32W	120-277V	55W
CW232347	CW WRAP 2 LAMP 32W 347V	2	T8	32W	347V	56W

### PHOTOMETRIC

CW232

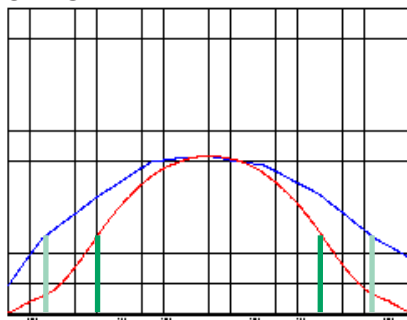


**SPECIFICATION**

Item	Parameter	CW232120M	CW232347
Electrical#	Input ( $V_{AC}$ )	120-277V	347V
	Frequency (Hz)	50-60Hz	50-60Hz
	Fixture Wattage (W)	55W	56W
	Ballast Factor	0.88	0.88
	Beam Angle	100°x150°	
	Fixture Efficiency (%)	60.4%	
	Lamp Type	T8	
	Number of Lamp	2	
	Lamp Wattage (W)	32W	
Mechanical	Dimension (mm)	1219(L) x 284(D) x 82.5(H)	
	Product Weight (kg)	2.5 kg	
	Cover	Prismatic Acrylic K-12	
Temperature	Ambient (°C)	40°C	
Standard Compliance	Approval Luminaire	cULus	
	Environment	RoHS	

**\*Note:**

- Due to the special condition of manufacturing processes, the typical data of technical parameters can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.
- Exceeding maximum ratings for operation wattage will cause hazardous overload and will likely destroy the lamps and ballasts.

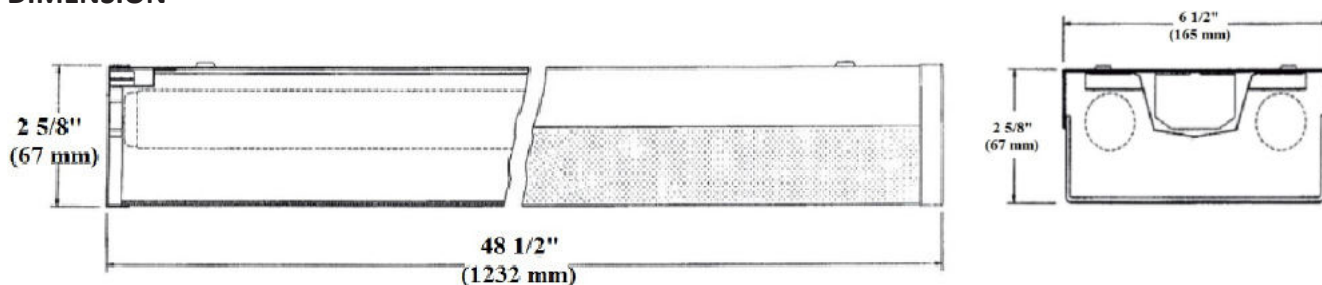**DIMENSION**

**RELATED & FURTHER INFORMATION**

- T8 Ballasts

**Ultrasave Lighting Ltd**

Tel: (905) 940-0888 / 1-866-733-9217

Fax: (905) 940-0338 / 1-866-733-8831

URL: www.ultrasave.ca