

RF - LED TROFFER RETROFIT KIT

Application:

- Office and other interior lighting requirements
- 100° wide flood angle is ideal for general lighting



CONSTRUCTION / FEATURES

- 24 gauge galvanized steel with high gloss white finish
- LM-80 qualified LEDs
- One piece panel designed for easy handling and pre-aligned LED arrays
- Pre-punched holes for easy installation
- Molex® connectors - easy to install and replace

ELECTRICAL SPECIFICATIONS

- High Efficacy with over 100 Lm/W
- Extremely long life of 50,000 hrs
- Good for 11 years (12 hrs/day)
- Allows frequent On-Off switching
- Instant full light output even in low temperature setting
- 5-year warranty on LED drivers and modules by Ultrasave
- cULus listed, -40°C to 40°C ambient
- DLC Listed




ULTRASAVE LIGHTING LTD.

www.ultrasave.ca


TECHNICAL INQUIRY, PLEASE CALL 905.940.0888 OR 1.866.733.9217

Data published here are based on the result of testing under controlled environmental conditions. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. C2614USL



PHYSICAL CHARACTERISTICS

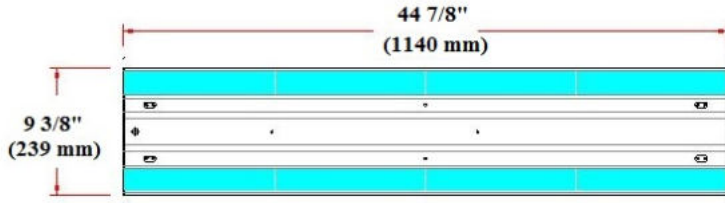

RF80LED08

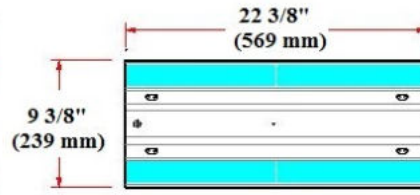

RF40LED04

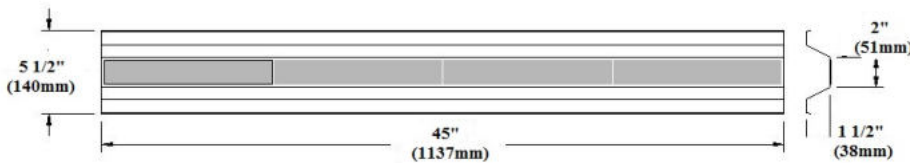

RF14-40LED04

Model #	Input Voltage (V)	Input Current (A)	Input Power (Watt)	Max. THD (%)	Light Output (Lm)
RF40LED04-120M	120 to 277	0.38 / 0.17	42	15	4,400
RF40LED04-347	347	0.13	42	15	4,400
RF80LED08-120M	120 to 277	0.74 / 0.33	83	15	8,800
RF80LED08-347	347	0.26	83	15	8,800
RF14-40LED04-120M	120 to 277	0.38 / 0.17	42	15	4,400
RF14-40LED04-347	347	0.13	42	15	4,400

Model #	Efficacy Lumen/W	Module #	# of Modules (PCS)	LED Driver #	# of LED Driver (PCS)	Color Temp. (K)
RF40LED04-120M	>102	LED1100/40	4	LED40-37V120M-MC	1	4,000
RF40LED04-347	>102	LED1100/40	4	LED40-37V347-MC	1	4,000
RF80LED08-120M	>102	LED1100/40	8	LED40-37V120M-MC	1	4,000
RF80LED08-347	>102	LED1100/40	8	LED40-37V347-MC	1	4,000
RF14-40LED04-120M	>102	LED1100/40	4	LED40-37V120M-MC	1	4,000
RF14-40LED04-347	>102	LED1100/40	4	LED40-37V347-MC	1	4,000

ULTRASAVE LIGHTING LTD.

www.ultrasave.ca

TECHNICAL INQUIRY, PLEASE CALL 905.940.0888 OR 1.866.733.9217

Data published here are based on the result of testing under controlled environmental conditions. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. C2614USL

ORDERING INFORMATION

Model #	Quantity/Box (pcs)	G. Weight (lbs)	Box Dimensions (L" x W" x H")
RF40LED04-120M	1	4	23.23 x 9.92 x 1.97
RF40LED04-347	1	4	23.23 x 9.92 x 1.97
RF80LED08-120M	1	7	48.00 x 9.92 x 1.97
RF80LED08-347	1	7	48.00 x 9.92 x 1.97
RF14-40LED04-120M	1	4	48.00 x 4.96 x 1.97
RF14-40LED04-347	1	4	48.00 x 4.96 x 1.97

ULTRASAVE LIGHTING LTD.

www.ultrasave.ca

TECHNICAL INQUIRY, PLEASE CALL 905.940.0888 OR 1.866.733.9217

Data published here are based on the result of testing under controlled environmental conditions. Actual performance can vary depending on operating conditions.

Specifications are subject to change without notice. C2614USL