

ULTRA-DE™ SERIES

- Energy Efficient
- Long Life 10,000 Hours Average Rated Life
- Universal Burn Position


Please See Safety & Handling Instructions on Page 90.



Watts	Ushio Ordering Code	Ushio Lamp Description	Volts V	Lamp Current A	MOL		Nom. lm	Min. lm	Color Temp K	Avg Rated Life* h	Commercial Life** h	Case Qty
					(mm)	(in)						
ULTRA-DE™ Double Tube 4-Pin Base – G24q-1 – for Electronic Ballasts – Dimmable												
13	3000159	CF13DE/827	91	0.175	131	5.2	900	810	2700	10000	12500	50
13	3000246	CF13DE/835	91	0.175	131	5.2	900	810	3500	10000	12500	50
13	3000160	CF13DE/841	91	0.175	131	5.2	900	810	4100	10000	12500	50
13	3000235	CF13DE/865	91	0.175	131	5.2	860	770	6500	10000	12500	50
ULTRA-DE™ Double Tube 4-Pin Base – G24q-2 – for Electronic Ballasts – Dimmable												
18	3000056	CF18DE/827	100	0.220	146	5.8	1200	1080	2700	10000	12500	50
18	3000143	CF18DE/835	100	0.220	146	5.8	1200	1080	3500	10000	12500	50
18	3000136	CF18DE/841	100	0.220	146	5.8	1200	1080	4100	10000	12500	50
ULTRA-DE™ Double Tube 4-Pin Base – G24q-3 – for Electronic Ballasts – Dimmable												
26	3000059	CF26DE/827	105	0.325	165	6.5	1800	1620	2700	10000	12500	50
26	3000144	CF26DE/835	105	0.325	165	6.5	1800	1620	3500	10000	12500	50
26	3000137	CF26DE/841	105	0.325	165	6.5	1800	1620	4100	10000	12500	50
26	3000238	CF26DE/865	105	0.325	165	6.5	1710	1540	6500	10000	12500	50

All dimensions shown in inches unless otherwise noted.
 * Based on ANSI / IESNA standards of 3 hours per start
 ** Based on estimated commercial operating standards of 12 hours per start

When using dimmers, dimming systems, or occupancy sensors, the lamp life will also be affected. The dimming system manufacturer can advise the affect of their system on lamp life.

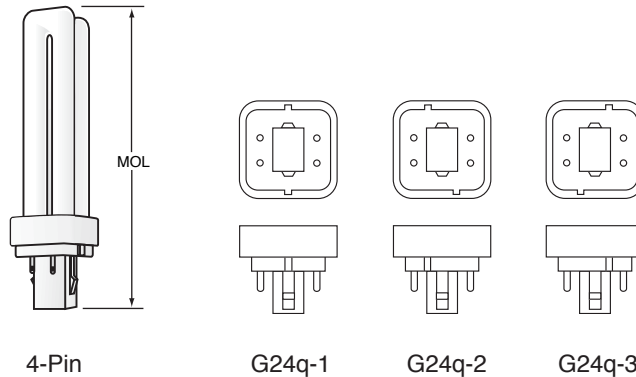

Hg - LAMP CONTAINS MERCURY
 Manage in Accord with Disposal Laws
 See: www.lamprecycle.org