A-LINE by Liteline

ATF7250

30W/40W/50W LED Wall Wash Track Fixture, Color Selectable, 3,100~5,100 Lumens

Track Lighting

Job Information	
Project Name	
Type	
Location	
Quantity	
Date	



Description

This 120V[1] low glare wall wash track head does it all with a built on CCT switch to select from 3000 K, 3500 K and 4000 K, and a selectable wattage switch from 30W, 40W or 50W. It offers 90-degree tilt, and a 260-degree rotation to highlight exactly where you want. Designed for 6' spacings, reducing fixture count. This fixture is perfect for lighting up a menu board at a restaurant. Dimmable 100%-10% when used with TRIAC/ELV dimming controls.

Features

Body
Constructed of die-cast aluminum, the body features an aesthetically pleasing smooth shape with an on/off switch on track connector (model specific).

Beam Control
The fixtures utilizes a reflector and a micro-prism acrylic lens for even light distribution with 90° × 60° beam angle.

Adjustability
Adjustable up to 90° tilt and 360° rotation to allow for spotlight into multiple directions.


LED Characteristics
High powered Samsung LED chips maintain uniform intensity with a typical luminous flux up to 5100 lumens at 50W, with a CRI of 90+. Color temperature switch on the back selects between 3000 K, 3500 K and 4000 K nominal CCTs. Driver has a 0.98 power factor and a max 20% THD.

Compatibility
Fixture is provided with A-Line connector which is compatible with Juno style track. For other connector configurations (Powergear, Halo, Juno, Lightolier, etc.), please contact your A-Line representative.

QuickShip In-Stock
In-Stock products ship within two business days of an order being released.*

SPECIFICATION	
Application	Track
Approved Location	Dry
Beam Angle	90° × 60°
CCT Switch Options	3000 K / 3500 K / 4000 K
Certification	cULus
Colour	BK / SL / WH
CRI	90+
Dimming	Yes
Dimming Tech	TRIAC/ELV
Lumen Maintenance	70% @ 50,000 Hrs
Lumens	Up to 5100
Lumens per Watt	80
Material	Aluminum
Primary Voltage	120[1]
Tilt	90°
Warranty	5 Years
Wattage Switch Options	30 / 40 / 50

Technical Drawings

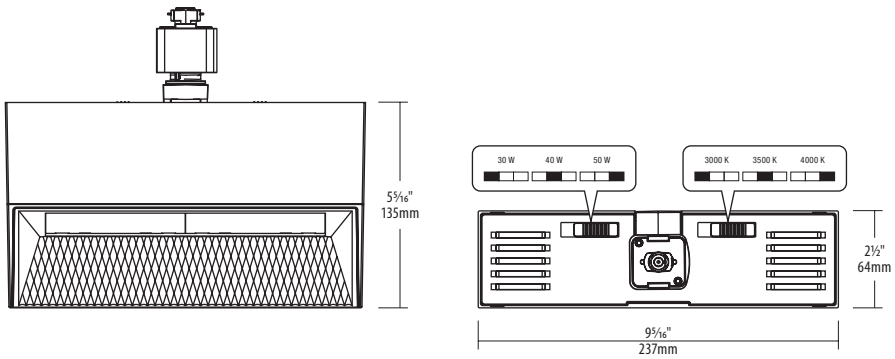

Lumens Chart

Wattage	Color Temp		
	3000 K	3500 K	4000 K
30W	3,100	3,300	3,300
40W	3,740	4,000	4,000
50W	4,670	5,100	5,000

Ordering Guide

Connector Type[1] - ATF7250-90 Finish Color

Blank : A-Line or Juno
H : Halo
L : Lightolier
P2 : Powergear 2-circuit, 120-277V
P3 : Powergear 3-circuit, 120-277V

BK : Black
SL : Silver
WH : White


QUICKSHIP 2-DAY
Highlighted option denotes QuickShip.

Notes:
[1] Input voltage must comply with the Track system; for options A, H, L – 120V only, for options P2, P3 – 120-277V.
* Dimming not available with powergear track options.
* QuickShip option is available on orders of 100 pieces or less. QuickShip lead time may vary for orders greater than 100 pieces. No additional shipment rates apply. Subject to availability.
For additional options please consult your A-Line Lighting representative. Juno is a registered trademark of Juno Lighting Group. Halo is a registered trademark of Cooper Lighting. Due to our continued efforts to improve our products, product specifications are subject to change without notice.


Liteline Corporation
Telephone 416.996.1856 1.866.730.7704
Fax 905.709.5255 1.888.738.9736
Copyright © 2025
All rights reserved.

LITELINE.COM

Photometrics

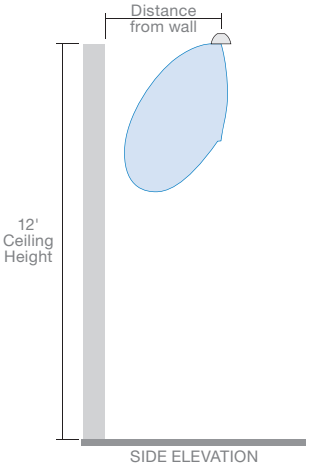


2' FROM WALL

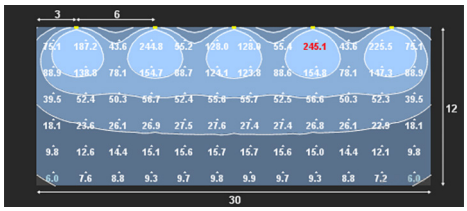


6' ON CENTER, 5 FIXTURES

3' FROM WALL

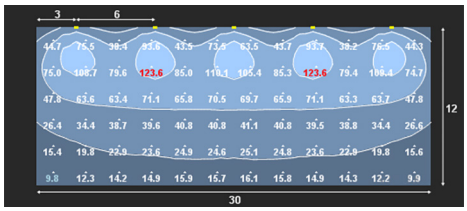

6' ON CENTER, 5 FIXTURES

4' FROM WALL

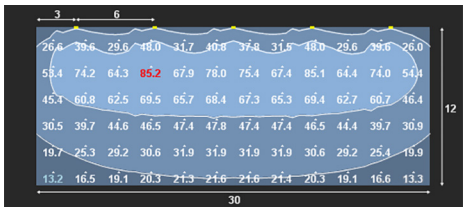

6' ON CENTER, 5 FIXTURES