

SLMT4-DTW-10W

4" SLIMLED MULTI, up to 800 Lumens, 10 Watt,
Dim-to-Warm, "Dead Front" Trim
Recessed Downlighting

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Phone		
Notes		

Features

Body

Durable airtight plastic body with mounting holes. On-face magnets allows for securely attaching a selection of dead-front faceplate trims.

LED Characteristics

This general application light fixture features an 10 watt LED module that maintains uniform intensity producing up to 800 lumens; with a typical CRI of 95. Available in 3000 K Dim-to-Warm color temperature.

Dimming

Color temperature dimming from 3000 K to 2000 K. This fixture is compatible with industry standard forward/reverse phase dimmers, TRIAC/ELV dimmers. For compatible dimmers, visit www.liteline.com/SlimLEDMulti

Beam Spread

The fixture lens provides 110° beam spread.

Mounting

Can be attached to an industry standard 4" octagon boxes with minimum depth of 1.5" (38mm) via mounting holes. See below for appropriate spacing requirements.

LED Driver

Built-in on board driver with 80mA output and 100-135V AC input.

Quick Connect push-in terminals

"Quick connect" push-in terminals for fast and easy wiring.

Operating Temperature

-30°C~40°C (-22°F~104°F)

Environment

- Suitable for wet locations.
- Fire-rated when used in a steel octagon box.


SPECIFICATION

Application	Recessed / Flushmount Downlight
Approved Location	Wet
Beam Angle	110°
CCT	3000 K ~ 2000 K
Certification	cETLus
Color	WH
CRI	95
Dimming	Yes
Dimming Tech	Forward/Reverse phase / TRIAC/ELV
Input	100-135V AC, 60Hz
LM79	Yes
LM80	Yes
Lumens	Up to 800
Lumens per Watt	Up to 80
Power Factor	0.91
Projected Life	70% @ 50,000 hrs
Warranty	Lifetime
Wattage	10W



Description

The SLMT4-DTW-10W is a 10 watt 4" round downlight installed onto 4" octagon box. It is a high-performance, easy to install residential grade downlight solution that offers good light output, energy-efficiency and streamlined design. Suitable for wet locations.

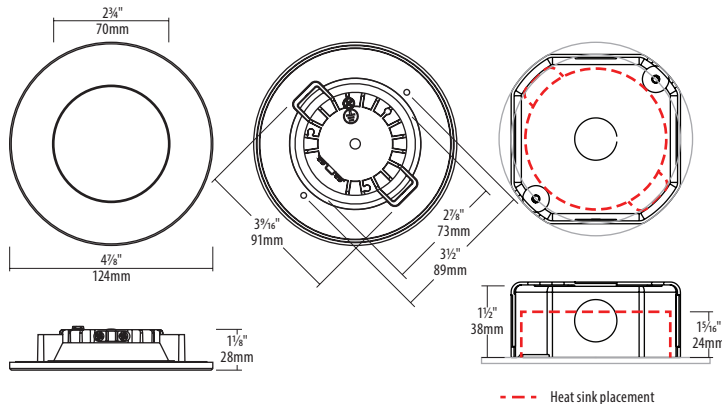

Ordering Guide



SLMT4-DTW-10W

4" SLIMLED MULTI Dim-to-Warm round downlight, 10W, with white magnetic trim.

Notes:

¹ Refer to Environment for more details.

Accessories are sold separately. For additional options please consult your Liteline representative.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Accessories



SLMT4-RT-BK

Round trim for SLIMLED MULTI series, Black.



SLMT4-RT-BN

Round trim for SLIMLED MULTI series, Brushed nickel.
NOTE: Not dead-front.



SLM4-RST-WHWH

Round trim for SLIMLED MULTI series, White/White.



SLM4-RST-WHSP

Round trim for SLIMLED MULTI series, White/Specular.



SLM4-RST-WHSS

Round trim for SLIMLED MULTI series, White/Semi-specular.



SLM4-RST-WHBG

Round trim for SLIMLED MULTI series, White/Gold.



SLM4-RST-BKBK

Round trim for SLIMLED MULTI series, Black/Black.



SLM4-RST-BKSP

Round trim for SLIMLED MULTI series, Black/Specular.



SLM4-RST-BKSS

Round trim for SLIMLED MULTI series, Black/Semi-specular.



SLM4-RST-BKBG

Round trim for SLIMLED MULTI series, Black/Gold.



SLMT4-ST-BK

Square trim for SLIMLED MULTI series, Black.



SLMT4-ST-SL

Square trim for SLIMLED MULTI series, Silver.



SLMT4-ST-WH

Square trim for SLIMLED MULTI series, White.



SLM4-SST-WHWH

Square trim for SLIMLED MULTI series, White/White.



SLM4-SST-WHSP

Square trim for SLIMLED MULTI series, White/Specular.



SLM4-SST-WHSS

Square trim for SLIMLED MULTI series, White/Semi-specular.



SLM4-SST-WHBG

Square trim for SLIMLED MULTI series, White/Gold.



SLM4-SST-BKBK

Square trim for SLIMLED MULTI series, Black/Black.



SLM4-SST-BKSP

Square trim for SLIMLED MULTI series, Black/Specular.



SLM4-SST-BKSS

Square trim for SLIMLED MULTI series, Black/Semi-specular.



SLM4-SST-BKBG

Square trim for SLIMLED MULTI series, Black/Gold.



LC-CRTL-3WAY-1

OnCloud Smart Wi-Fi 3-way switch. Suitable for 3-way or 4-way switch applications.



LC-CRTL-DIM-1

OnCloud Smart Wi-Fi dimmer. Features an ON/OFF press and a 7 level touch slider.



SLMT4-CBPLT

Concrete box mounting plate kit, for SLIMLED MULTI.



SLMT4-SCREWS

10 pack of 1.5" Replacement screws. Can be used for large gaps between ceiling material and junction box.