

SPECIFICATION

NEXLEDS®
NEXLEDS LTD

18W	2700K (1389LM)	3000K (1409LM)	3500K (1437LM)	4000K (1460LM)	5000K (1426LM)
24W	2700K (2191LM)	3000K (2203LM)	3500K (2217LM)	4000K (2256LM)	5000K (2231LM)
24W	2700K (2260LM)	3000K (2308LM)	3500K (2375LM)	4000K (2400LM)	5000K (2388LM)
28W	2700K (2480LM)	3000K (2550LM)	3500K (2600LM)	4000K (2800LM)	5000K (2730LM)

5 CCT
Changeable



VIDEO



9"/11"/13"/15" Die-cast Flush Mount Panel

NX-9SMPL18W-5CCT-WH

NX-11SMPL24W-5CCT-WH

NX-13SMPL24W-5CCT-WH

NX-15SMPL28W-5CCT-WH

Specification

PRODUCT NAME:	9" Die-cast Flush Mount Panel	11" Die-cast Flush Mount Panel	13" Die-cast Flush Mount Panel	15" Die-cast Flush Mount Panel
MODEL NO.:	NX-9SMPL18W-5CCT-WH	NX-11SMPL24W-5CCT-WH	NX-13SMPL24W-5CCT-WH	NX-15SMPL28W-5CCT-WH
SPECIFICATION :	AC120V; 50/60Hz; 18W;	AC120V; 50/60Hz; 24W;	AC120V; 50/60Hz; 24W;	AC120V; 50/60Hz; 28W;
WORKING TEMP:	-4(°F)~+122(°F)	-4(°F)~+122(°F)	-4(°F)~+122(°F)	-4(°F)~+122(°F)
POWER FACTOR:	>0.90; Flicker free	>0.90; Flicker free	>0.90; Flicker free	>0.90; Flicker free
CRI(RA) :	>90	>90	>90	>90
COLOR:	White Color	White Color	White Color	White Color
LIGHT SOURCE:	SMD2835 Chip	SMD2835 Chip	SMD2835 Chip	SMD2835 Chip
LUMEN :	1460lm	2256lm	2400lm	2800lm
LIFE TIME :	50000 hrs	50000 hrs	50000 hrs	50000 hrs
BEAM ANGLE :	120°	120°	120°	120°
PRODUCT SIZE:	D(8.86 inch)*H(0.79inch)	D(10.98 inch)*H(0.98inch)	D(12.8 inch)*H(0.98inch)	D(14.96 inch)*H(0.98inch)
IP:	Suitable for Wet location	Suitable for Wet location	Suitable for Wet location	Suitable for Wet location
APPLICATION :	Home, Shop, Hotel	Home, Shop, Hotel	Home, Shop, Hotel	Home, Shop, Hotel
WARRANTY:	5 years	5 years	5 years	5 years
STANDARD:	ETL	ETL	ETL	ETL
DIMMABLE:	Triac Dimming	Triac Dimming	Triac Dimming	Triac Dimming
COLOR TEMP:	2700K-3000K-3500K-4000K-5000K Changleable			



www.nexleds.ca



Email: sales@nexleds.ca

NEXLEDS®

NEXLEDS LTD

SPECIFICATION

NEXLEDS®
NEXLEDS LTD

Feature:

- Emits evenly, without halo and shadow;
- Fit 2.75 or 3.5 inch J-Box;
- Support surface mount;
- Die-cast trim;
- Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.

Die-cast trim

Precision casting, excellent heat dissipation, high corrosion; 9" lamp thickness only 0.79"; 11/13/15" lamp thickness only 0.98"; Black Model Available;




Color temperature optional 2700K-5000K



Mounting bracket


With multiple apertures, can be installed into any 2.75 or 3.5 inch junction box.

2.75" Junction Box installation hole



3.5" Junction Box installation hole

Dimension:

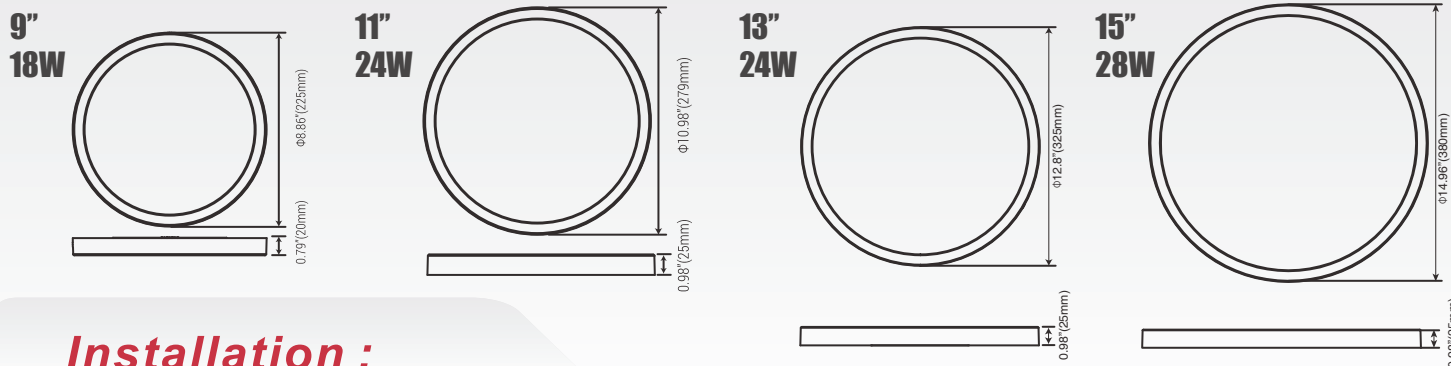

Installation :

1.Remove the bracket from the fixture by twisting in anticlockwise direction, see Fig1.

2.Refer to the hole position on the bracket and do the matching to J-Box. Attach them with screws, see Fig2.

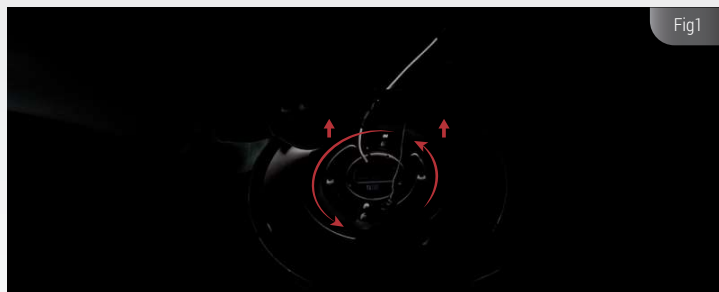


Fig1



Fig2

3.Connect supply wires to wires on fixture/bracket with wire nuts. Attach white to white, black to black, and copper wire to green wire as grounding connection, select lamp color desired with the CCT switch, see Fig3.

4.Arrange the wires into the J-Box. Align the 2 screw points on fixture to the wider side of long holes on the bracket, twist in clockwise direction until fixing stable. Turn on the power after installation, check the fixture can work well, see Fig4.

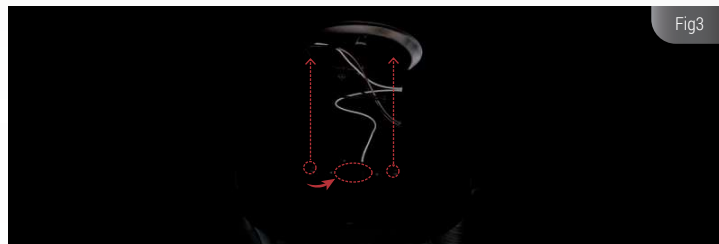


Fig3

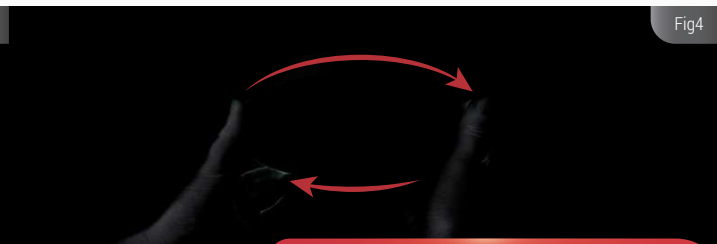


Fig4



www.nexleds.ca



Email: sales@nexleds.ca

NEXLEDS®

NEXLEDS LTD