



50W-40W-30W

Changeable

3000K-3500K-4000K-5000K

Changeable



VIDEO

LED DOWNLIGHT 50W/40W/30W 110VAC

NX-LAL4F-50W-L-DV-TCP


Specification

Product Name	NX-LAL4F-50W-L-DV-TCP
Model	NX-LAL4F-50W-L-DV-TCP
Power	50W/40W/30W
Color Temperature	3000K-3500K-4000K-5000K Tunable
Beam Angle	40°/60°/80°
Light Output (lm)	4000lm/5000lm/6000lm
Life Span (hrs)	>50,000hrs
Input Voltage	110VAC
Frequency	50/60Hz
Dimming	Yes
Application	Indoor Commercial Lighting
Standard	UL, DLC

Features:

1. Remote control hanging is included for convenience.
2. Positive spring and built-in shock absorber to prevent the hanging light from falling.
3. CCT (Color Temperature) 3000K, 3500K, 4000K, 5000K.
4. LED lighting with a long life span of 50,000 hours.
5. Energy saving with 10W power consumption.
6. Available with integrated 12VDC and 12VDC/24VDC power supply.
7. Multiple mounting options for the purpose of saving installation cost.

Product Dimension:

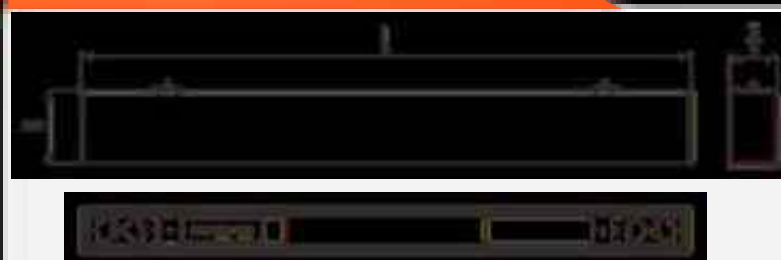


LxWxH	
4FT.	L:48 in. x W:1.96 in. x H:2.75 in.

Function Description:

Power: 50W/40W/30W

CCT: 3000K, 3500K, 4000K, 5000K

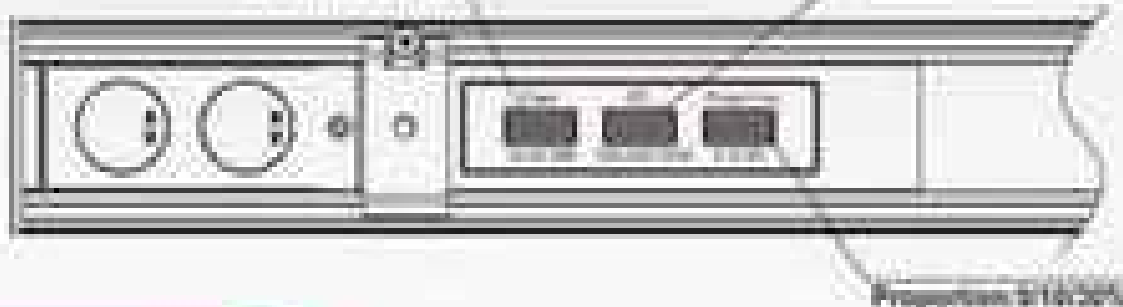

Instruction:

Suspending Installation -2FT4FT8FT(Included)

Parts List



LED Light fixture (Included)



LED Mounting Bracket (Included)



LED Mounting Screw (Included)




LED Mounting Nut (Included)



LED Mounting Plate (Included)


Industrial and Commercial Applications

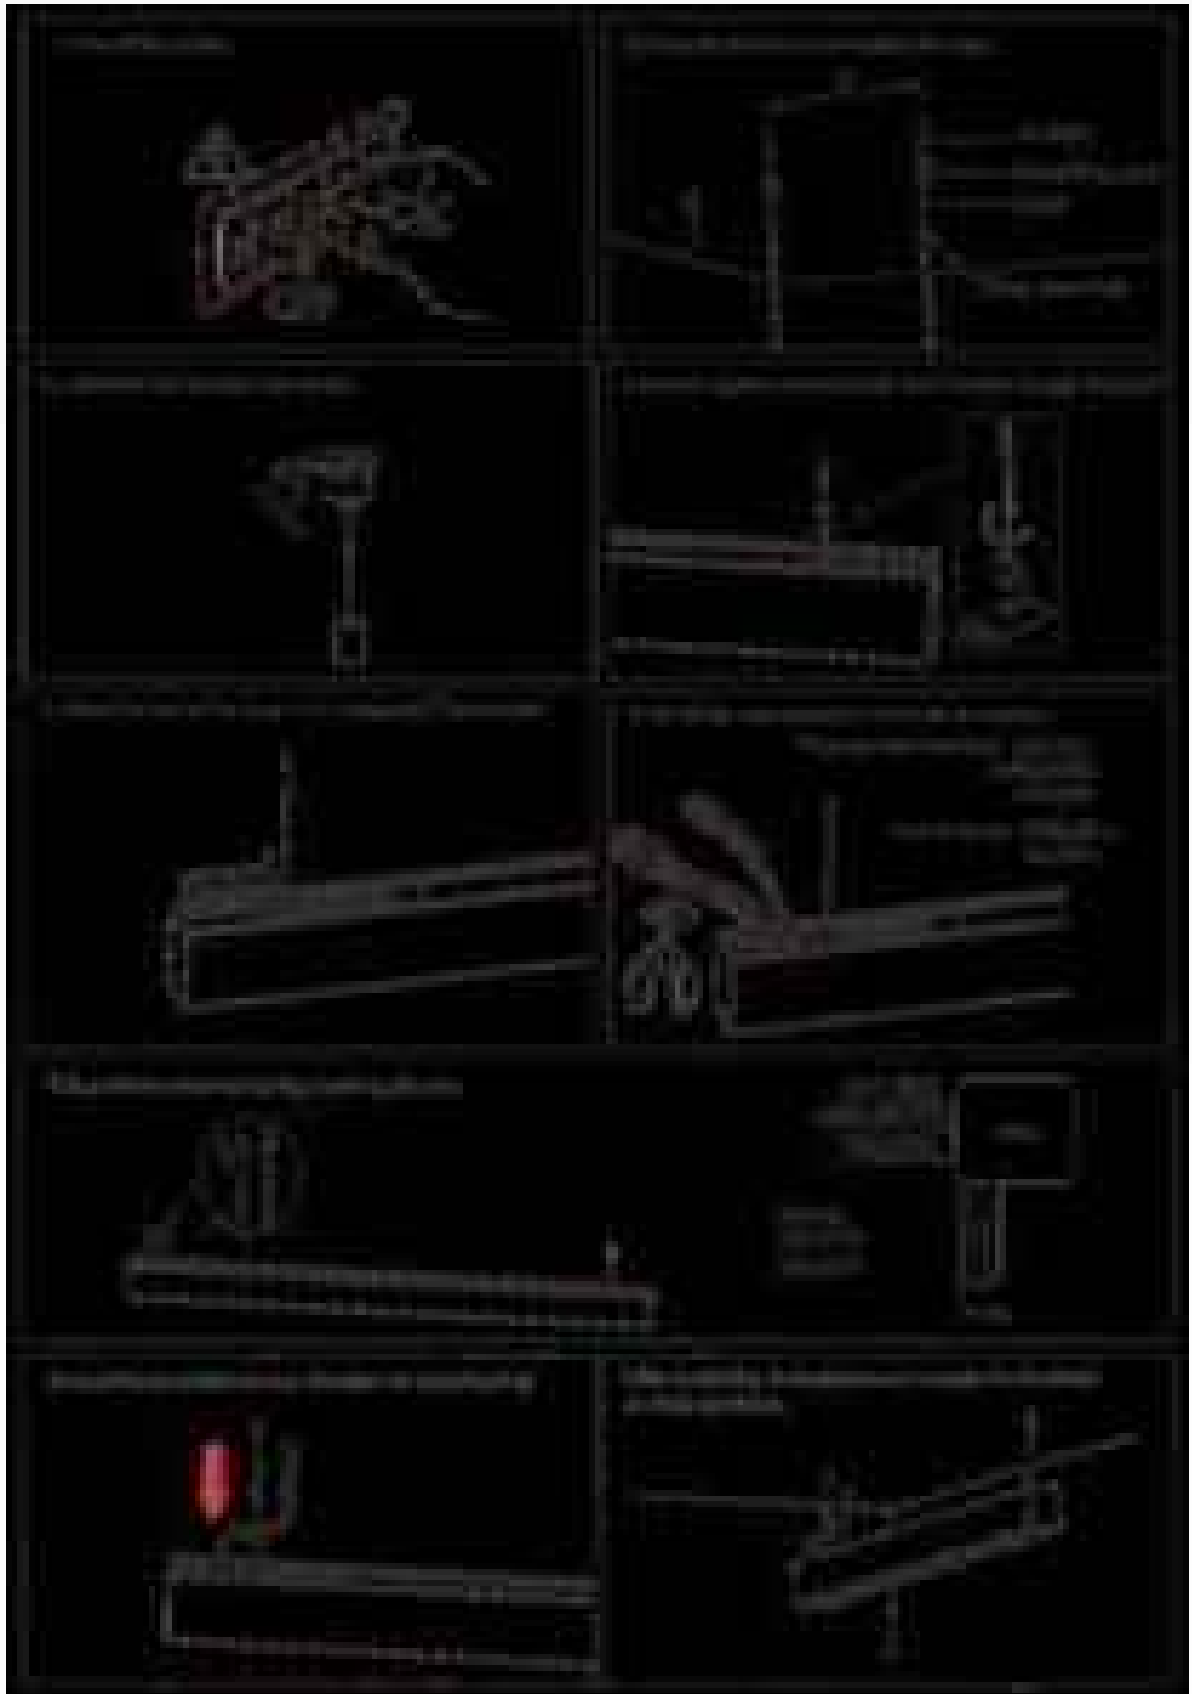




Instruction:

Ceiling Box Installation Instructions

Part List

						
1x Ceiling Box	1x Ceiling Box	1x Screw	1x Screw	1x Screw	1x Screw	1x Screw

Installation Instructions


Instructions:

Main assembly instructions		Notes



Specialty light bar using and installation instructions				Notes

INTRODUCTION:

Before using this light fixture, please read the following instructions:

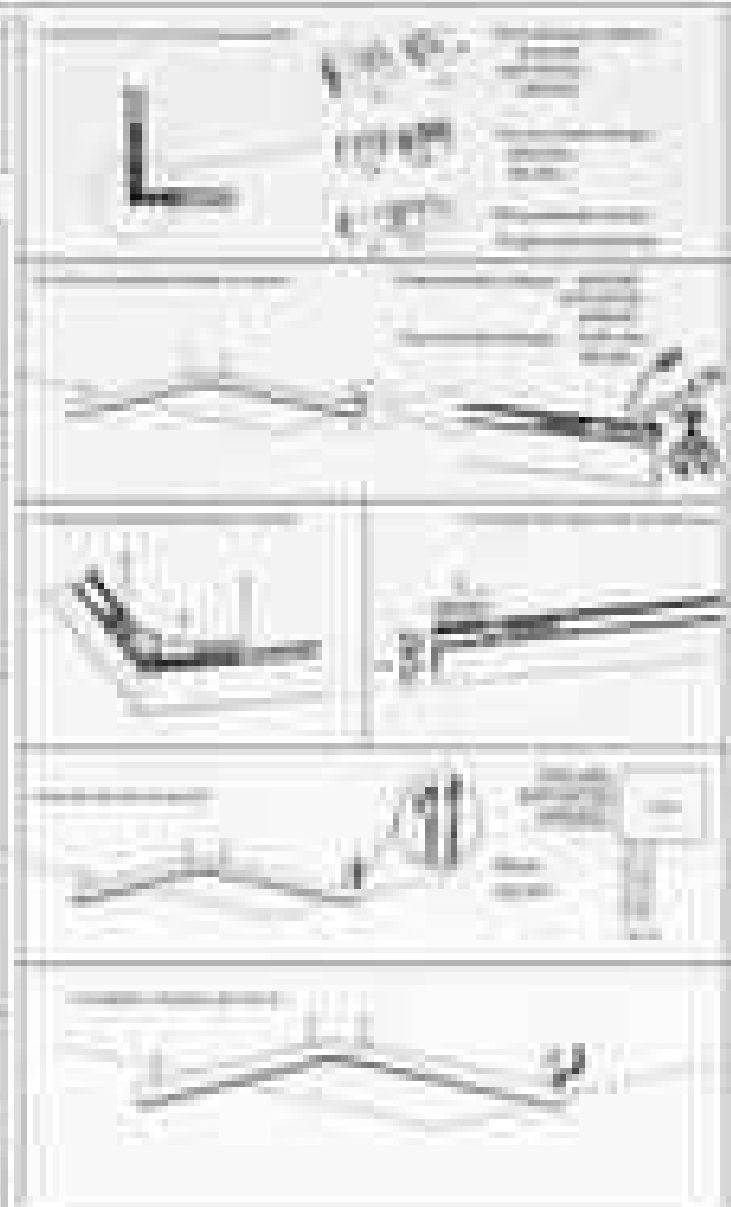


Installation:

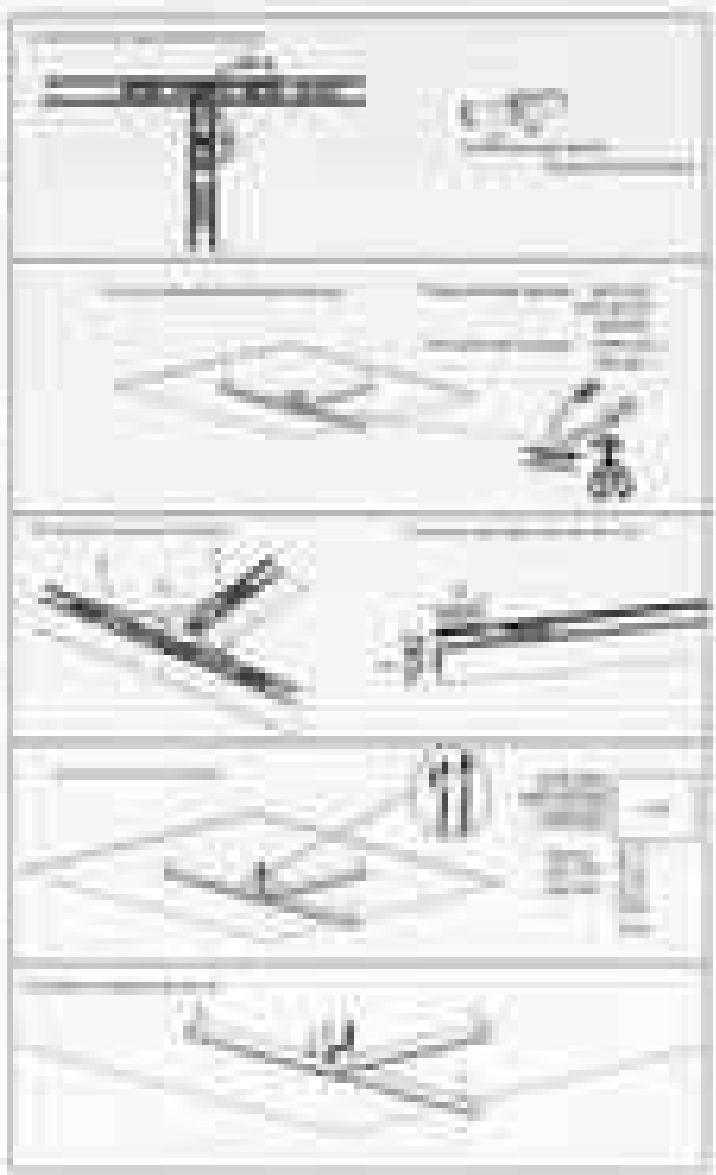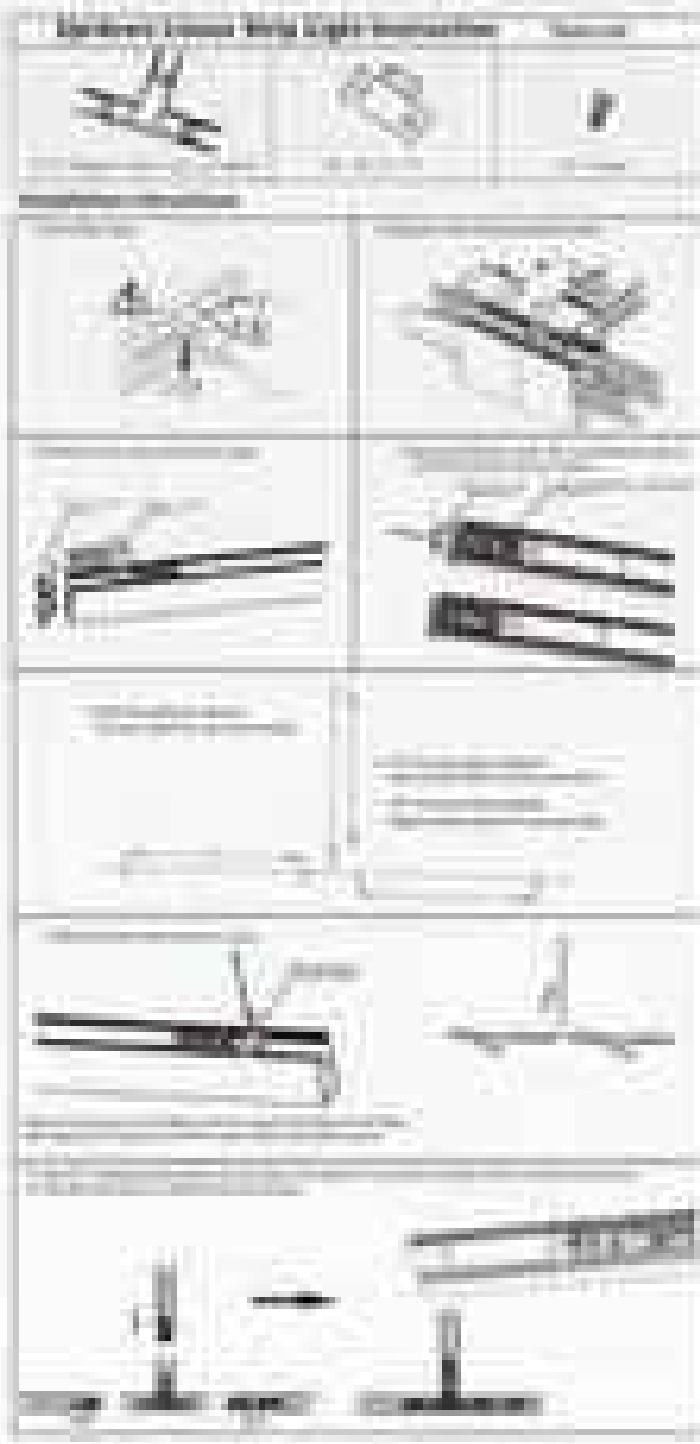


T

Instruction:

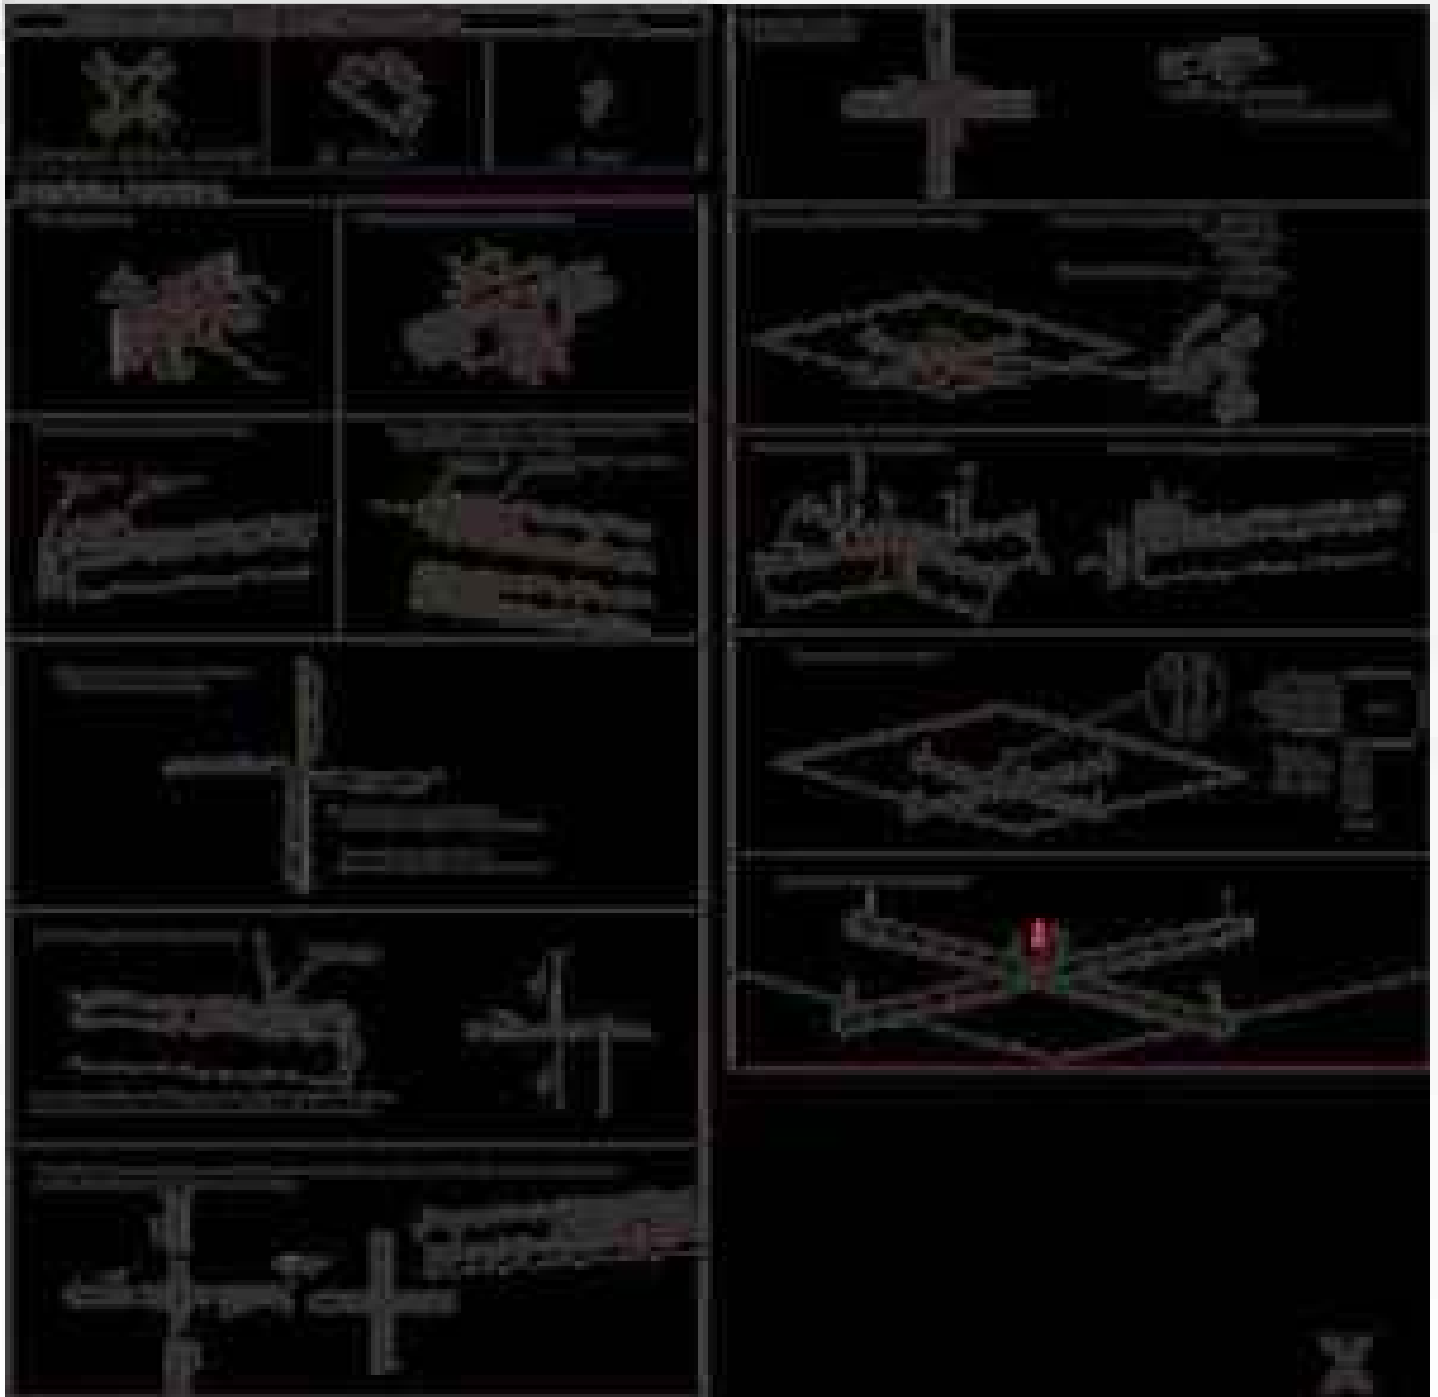


Instruction:

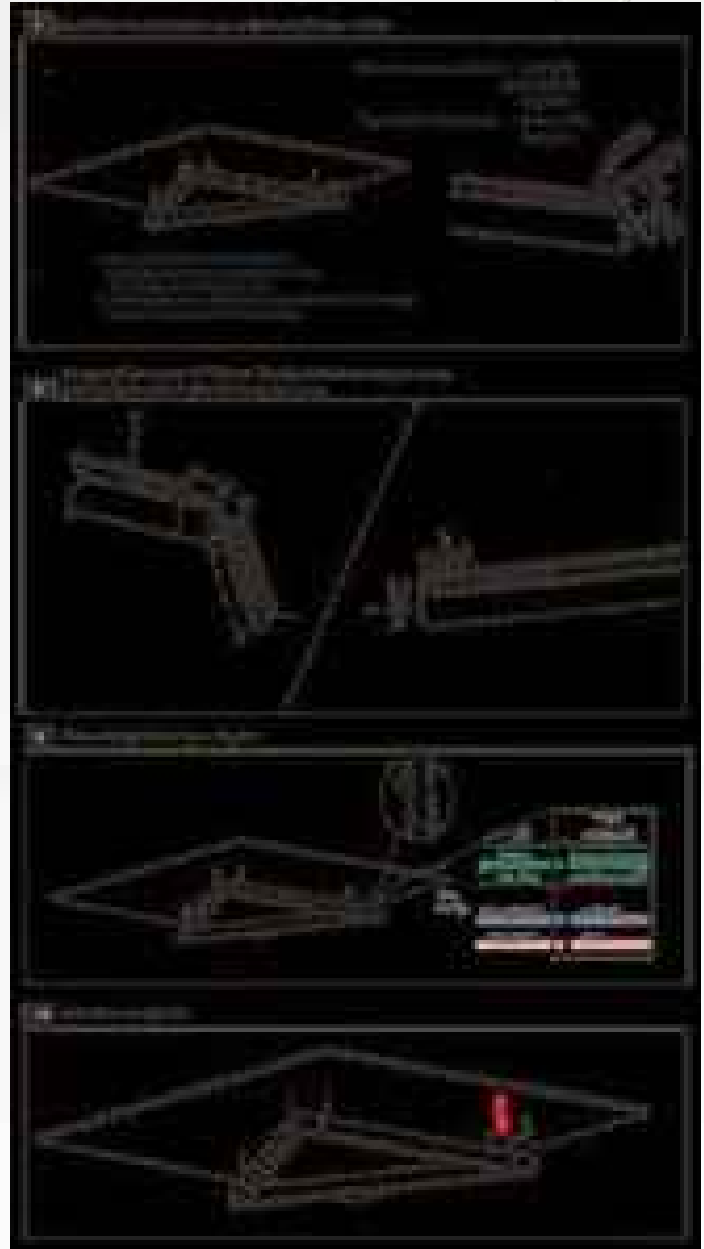



Instruction:

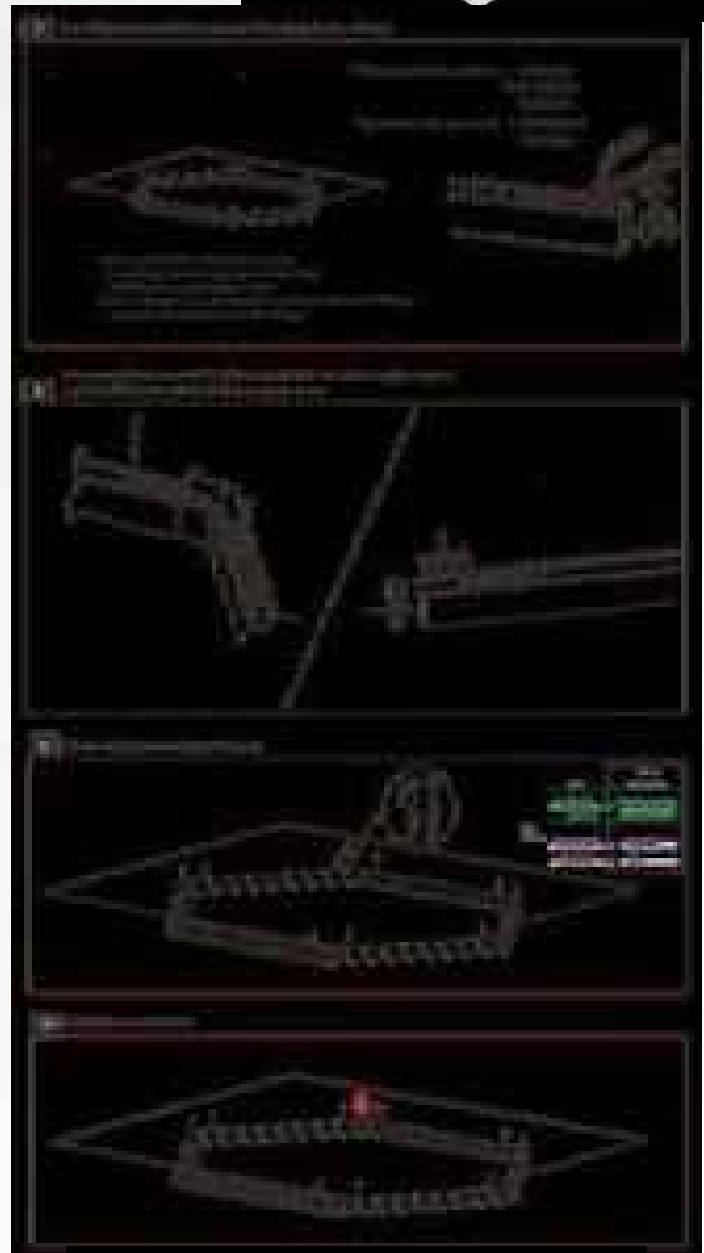

Applications:



Note:

1. The installation and performance shall be completed by electricians or professionals.
 2. Please follow the power supply instructions and safety precautions.
 3. The warranty is void if the product is not installed according to the instructions.
 4. Please keep away from the power supply and keep the product away from the heat.
 5. Working temperature: 40°F - 140°F, storage temperature: 40°F - 140°F.

Important:

Please do not touch the product directly with your hands. If you need to touch the product, please wear gloves. The product is not designed to be used in wet or damp areas. The product is not designed to be used in areas with high humidity. The product is not designed to be used in areas with high temperature. The product is not designed to be used in areas with high vibration. The product is not designed to be used in areas with high magnetic field.

Warning:

- ⚠️ Do not touch the product directly with your hands. If you need to touch the product, please wear gloves.
- ⚠️ Do not touch the product directly with your hands. If you need to touch the product, please wear gloves.
- ⚠️ Do not touch the product directly with your hands. If you need to touch the product, please wear gloves.
- ⚠️ Do not touch the product directly with your hands. If you need to touch the product, please wear gloves.
- ⚠️ Do not touch the product directly with your hands. If you need to touch the product, please wear gloves.
- ⚠️ Do not touch the product directly with your hands. If you need to touch the product, please wear gloves.