


SPECIFICATION

NEXLEDS®
NEXLEDS LTD

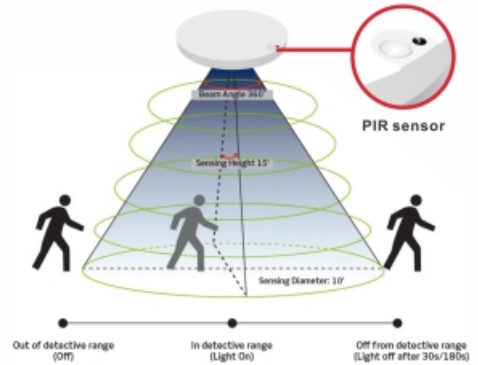

**3 CCT
CHANGEABLE**

3000K 4000K 5000K



3000K	4000K	5000K
10W: 1000 lm 15W: 1350 lm 18W: 1750 lm	10W: 1050 lm 15W: 1450 lm 18W: 1850 lm	10W: 1000 lm 15W: 1350 lm 18W: 1750 lm

Frameless Sensor LED Downlight

NX-SMDSE9-18W

10W-15W-18W

Specification

Product Name :	Frameless Sensor LED Downlight
Model No. :	NX-SMDSE9-18W
Specification :	AC100-130V; 50/60Hz; 10W (87mA) / 15W (129mA) / 18W (160mA) 10W-15W-18W changeable
Working Temp :	-20~50(°C)
Power Factor :	0.95
CRI(ra) :	>80
Color :	White Color
Material :	PC
Light Source :	SMD2835
Lumen :	90~105 lm / W
Life Time :	50000 hrs
Beam Angle :	120°
Product Size :	9.1 inch
IP :	IP20
Application :	Home, Shop, Hotel
Warranty :	5 years
Standard :	ETL
Color Temp :	3000K-4000K- 5000K changeable
Sensor Detective Time:	30s and 180s changeable
Sensor Working Height:	8ft~15ft
Sensor Trigger Diameter:	6ft~10ft
Photocell Working Lux:	<13lux
Sensor Control:	On/off changeable



www.nexleds.ca



Email: sales@nexleds.ca





NEXLEDS®

NEXLEDS LTD

SPECIFICATION

NEXLEDS®
NEXLEDS LTD

Feature:

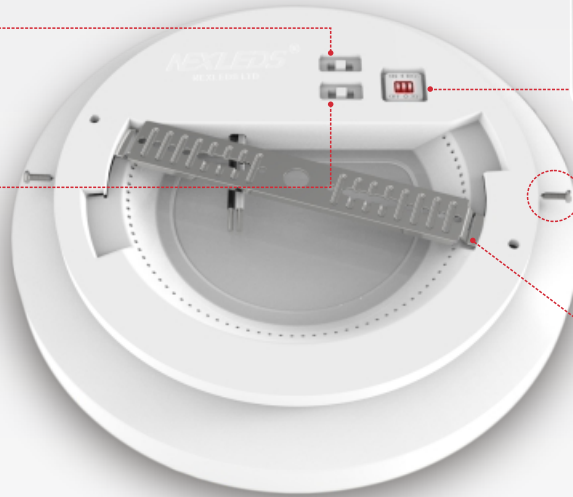


- Switch 2: Night motion sensor mode
- Switch 3: Sensor ON/OFF
- Switch 1: 30/180s sensor duration time setting
- Switch 2: All motion sensor mode

lock the screw after bracket twisting-on





Motion sensor &
Light sensor
Panel light

EASY & FAST installation

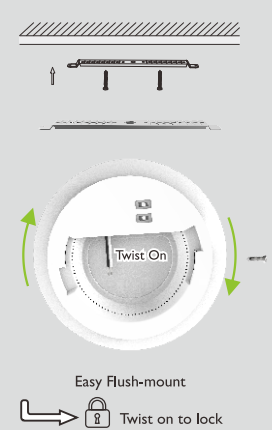

White PC

Dimension:

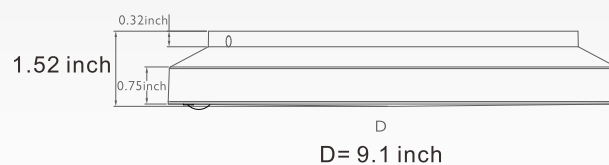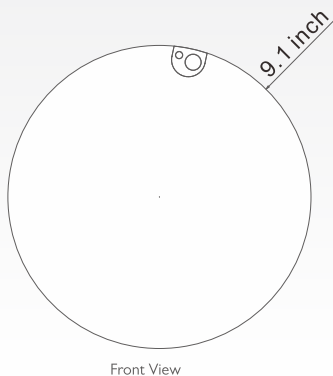

www.nexleds.ca









Email: sales@nexleds.ca

NEXLEDS

NEXLEDS LTD

Surface-mounted

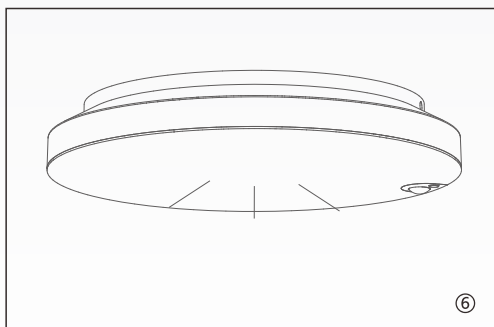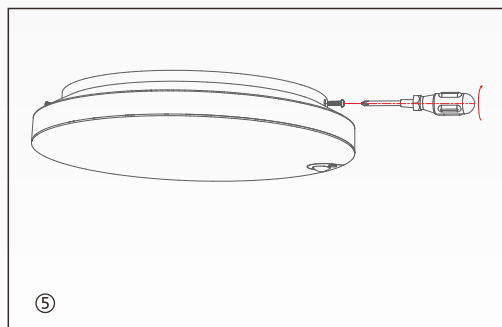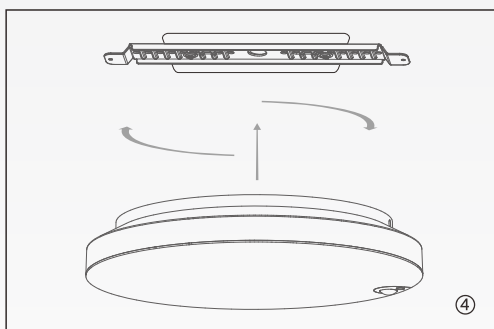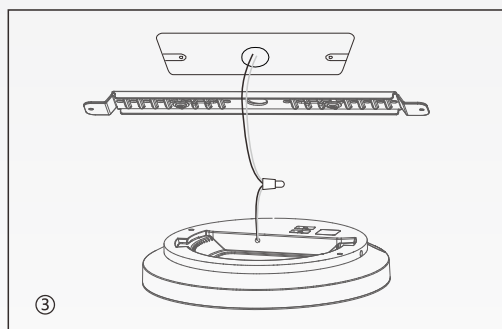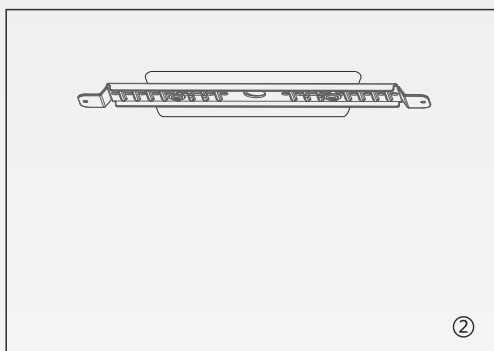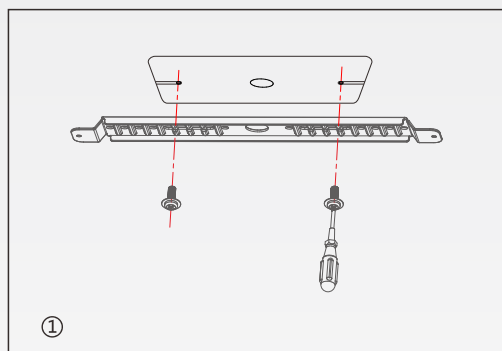

1. Screw the mounting bracket to the ceiling.
2. After the mounting bracket is fixed, it is as shown above.
3. Connect power cable with terminal .
4. Fixed mounting bracket.
5. Connect to mains-L-N, and install it clockwise.
6. Turn on the mains to light up the product.

Applications:



Hotel



Corridor



Balcony



Front of door



Elevator Exit

