

Date:

Type:

Project Name:

Part Number:

Ballast-compatible LED T8 U TUBE



FEATURES

- Replacement for Conventional Fluorescent Lamp
- UL Type-A, compatible with most electronic instant-start, programmed-start ballasts
- Improved Lamp Durability with Coated Plastic
- Suitable for use in enclosed fixture
- Suitable for use in dry and damp locations
- NSF Listed: NSF/ANSI Standard 2 - Food Equipment
- High luminous efficiency
- Operating Temperature: -20°C/-4°F to 45°C/113°F
- 50,000+ Hour Lifetime(L70)

APPLICATIONS


- Office Lighting
- Commercial Applications
- Residential
- Food Service Equipment



SPECIFICATION

ORDER #	MODEL #	WATTS	BASE	VOLTAGE(V)	HOUR RATING	BEAM ANGLE	INITIAL LUMENS	CCT(K)
R43002	WLL-LEDT8BC13/840/U	13W	G13	BF	50,000	330°	1850lm	4000K
R43003	WLL-LEDT8BC13/850/U	13W	G13	BF	50,000	330°	1900lm	5000K

DIMENSION

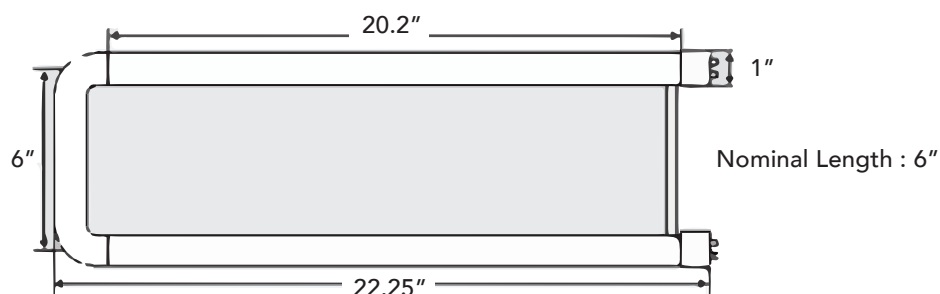

905-604-4666



info@renolighting.com



www.renolighting.com