

Date:

Type:

Project Name:

Part Number:

Ballast-compatible LED T8 TUBE (Type A)



FEATURES

- Replacement for Conventional Fluorescent Lamp
- UL Type-A, compatible with most electronic instant-start, programmed-start ballasts
- Improved Lamp Durability with Shatterproof Coated Glass
- Suitable for use in enclosed fixture
- Suitable for use in dry and damp locations
- NSF Listed: NSF/ANSI Standard 2 - Food Equipment
- High luminous efficiency
- Operating Temperature: -20°C/-4°F to 45°C/113°F
- 50,000+ Hour Lifetime(L70)
- 5 Year Warranty

APPLICATIONS

- Office Lighting
- Retail Lighting
- Residential
- Food Service Equipment


Shatterproof

SPECIFICATION

ORDER #	MODEL #	LENGTH	WATTS	BASE	VOLTAGE(V)	HOUR RATING	BEAM ANGLE	INITIAL LUMENS	CCT(K)	CRI
R41009	WLL-LEDT8BC9/840	2'	9W	G13	BF	50,000	330°	1300	4000K	83+
R41010	WLL-LEDT8BC9/850	2'	9W	G13	BF	50,000	330°	1350	5000K	83+
R41011	WLL-LEDT8BC11/840	3'	11W	G13	BF	50,000	330°	1600	4000K	83+
R41012	WLL-LEDT8BC11/850	3'	11W	G13	BF	50,000	330°	1650	5000K	83+
R41005	WLL-LEDT8BC10.5/830/G2	4'	10.5W	G13	BF	50,000	330°	1650	3000K	83+
R41003	WLL-LEDT8BC15/840/G2	4'	15W	G13	BF	50,000	330°	2100	4000K	83+
R41004	WLL-LEDT8BC15/850/G2	4'	15W	G13	BF	50,000	330°	2200	5000K	83+



905-604-4666



info@renolighting.com



www.renolighting.com

RENO GLASS VS PLASTIC

Plastic Tube




RENO Glass




DIMENSIONS

■ 2FT

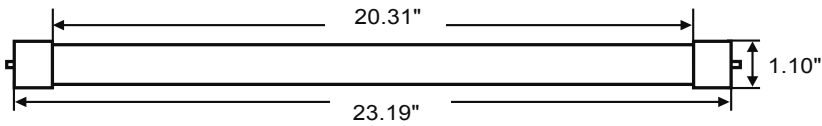

■ 3FT

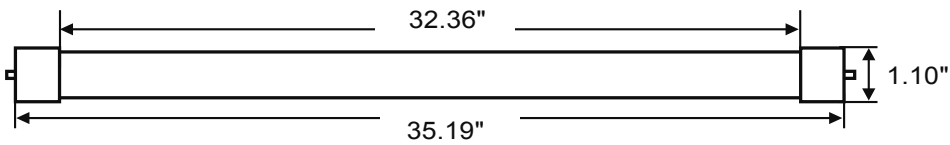

■ 4FT

