

Date:

Type:

Project Name:

Part Number:

BOLLARD LIGHT



BL01A



BL01B

DESCRIPTION

The RENO LED Bollard fixture provides glare-free lighting that replaces 70-100 watt metal halide fixtures. The housing is made of die cast aluminum with a flush mounting base, polycarbonate lens.

FEATURES

- Energy savings up to 80% compared to metal halide bollards
- Up to 50,000 hour L70 lifetime, TM-21 standards @ 25°C
Dual Voltage 120-347V
- Multi CCT selectable. 3000K/4000K/5000K
- Color Finish: Black or Bronze (special order)
- IP65 Rated. Temperature range of -40°C to +45°C
- 5 Year Warranty

APPLICATIONS

- Pathway Lighting
- Perimeter Lighting
- Entryway Lighting




SPECIFICATION

ORDER #	MODEL#	WATTS	VOLTS	LUMENS OUTPUT	BEAM ANGLE	CCT	POWER FACTOR	CRI
R56001	RENO-BL01A-25W-DV-MCCT	25W	120-347V	3000	360°	3000K/4000K/5000K	0.9	80
R56002	RENO-BL01B-25W-DV-MCCT	25W	120-347V	3000	360°	3000K/4000K/5000K	0.9	80



LUMINOUS EMITTANCE

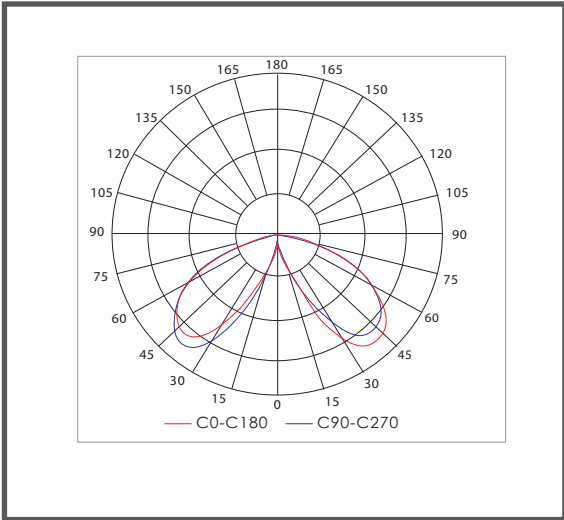

DIMENSION

