

## LED FLOOD LIGHT



### DESCRIPTION

Reno compact flood lights are water resistant rated at IP65. Creating bright, security and spot lighting for a variety of applications such as perimeter, entryway, facades, landscapes, retail and residential complexes and architectural lighting. Can mount in almost any angle with a yoke-style arm and Knuckle Mount Attachment

### FEATURES

- Die-cast aluminum housing with Glass Lens
- (prevent yellowing)
- L70 rated chip for over 100,000 projected life hours
- 1/2" NPT stainless steel threaded nipple
- Dual Voltage 120-347V
- -40°C~ to 50°C operating temperature
- 5 Year Warranty
- Custom colours available/ Black colour default
- Selectable Multi CCT



### APPLICATIONS

- Parking Area
- Walkway
- Commercial Building

## SPECIFICATION

| ORDER # | MODEL#                 | WATTS | VOLTAGE(V) | MOUNTING | INITIAL LUMENS | CCT       | CRI |
|---------|------------------------|-------|------------|----------|----------------|-----------|-----|
| R54005  | RENO-FL-30W-MCCT-DV-KN | 30W   | 120-347V   | KNUCKLE  | 4050           | 35/40/50K | 80  |
| R54006  | RENO-FL-30W-MCCT-DV-YK | 30W   | 120-347V   | YOKE     | 4050           | 35/40/50K | 80  |
| R54007  | RENO-FL-50W-MCCT-DV-KN | 50W   | 120-347V   | KNUCKLE  | 6750           | 35/40/50K | 80  |
| R54008  | RENO-FL-50W-MCCT-DV-YK | 50W   | 120-347V   | YOKE     | 6750           | 35/40/50K | 80  |
| R54009  | RENO-FL-75W-MCCT-DV-YK | 75W   | 120-347V   | YOKE     | 10125          | 35/40/50K | 80  |



RENO<sup>TM</sup>  
LIGHTING

Date:


Type:

Project Name:


Part Number:

## DIMENSION

30W

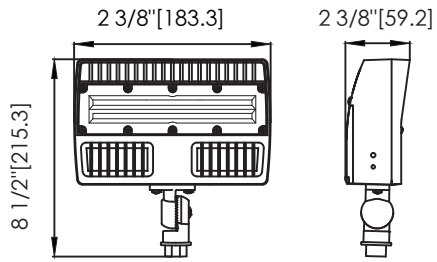

50W/75W

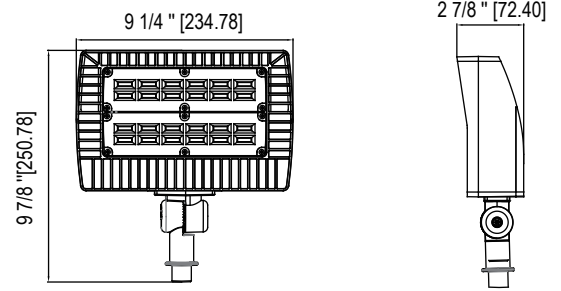

905-604-4666



info@renolighting.com



www.renolighting.com