

Date:	Type:
Project Name:	Part Number:

LED Linear Strip 2ft, 4ft. & 8ft.



FEATURES

- Dual Voltage 120-347V
- 0-10V Continuous Dimming
- Surface or Suspension Mounting options
- Easy and Safe Installation
- The field adjustable Multi-Colour
- Frosted Polycarbonate Lens
- 100,000 hours Lifespan
- Ambient Temperature: -30°C - +50°C
- Suitable for Damp Locations
- Includes Coverplate and V-Hangers

APPLICATIONS

- Parking Garage
- Stairwell
- Low Bay Application
- Warehouse




SPECIFICATION

ORDER #	MODEL#	LUMENS OUTPUT	LUMINOUS EFFICACY	WATTS	VOLTAGE	POWER FACTOR	CCT	CRI
R33009	RENO-LSN2-22W-DV-MCCT(2FT)	3041lm	130lm/W	22W	120-347V	0.9	3500/4000/5000K	≥ 80

AVAILABLE ACCESSORIES

ORDER #	DESCRIPTION
R39501	L-Bracket for 90° Installation
R39502	I-Bracket for Straight continuous Installation
R39402	Microwave sensor for LED strip fixture

OPTIONAL

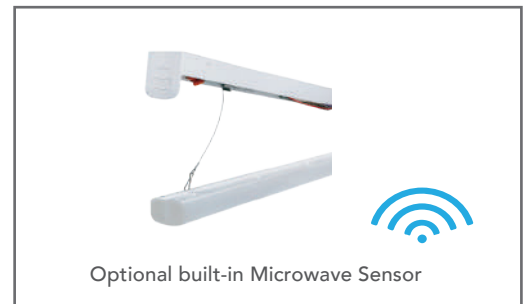



Date:


Type:

Project Name:

Part Number:

DIMENSION for 2ft.

FRONT




BACK




DIMENSION for 4ft.

FRONT




BACK



DIMENSION for 8ft.

FRONT



BACK




0°H

90°H

45°H

RENO-LSN4-34W-DV-MCCT(4FT)

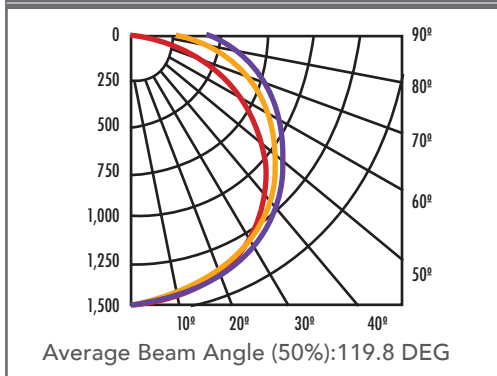

RENO-LSN8-68W-DV-MCCT(8FT)

