

Date:	Type:
Project Name:	Part Number:

## MAKO SERIES

### LED VAPOR TIGHT FIXTURE



#### DESCRIPTION

Reno linear vapor tight is housed in polycarbonate silicon perimeter gasket with brackets for mounting. Engineered for powerful lighting. The Reno linear vapor tight has an IP65 protection grade and is DLC and UL certified, making it a great lighting solution for your industrial application.

#### APPLICATIONS

- Parking Area
- Stairwell
- Low Bay Application
- Utility Lighting

#### FEATURES

- Surface mount and suspension kit optional
- One-piece polycarbonate housing body and frosted polycarbonate lens
- DLC Premium and UL listed
- All components have UL certification
- Protection Grade IP65
- Operating temperature: -22°F - 122°F
- Dual Voltage 120-347V
- Rated Life. > 70,000 hours
- 10-year Limited warranty
- 0-10V Dimming

#### SPECIFICATION

ORDER #	MODEL#	LUMENS OUTPUT	EFFICACY (lm/w)	IP RATING	WATTS	VOLTS	POWER FACTOR	CCT	CRI
R33103	RENO-LVP4-40W-DV-MCCT(4FT)	5400lm	130	IP65	40W	120-347V	0.9	3500K/4000K/5000K	80
R33104	RENO-LVP4-60W-DV-MCCT(4FT)	7800lm	130	IP65	60W	120-347V	0.9	3500K/4000K/5000K	80
R33108	RENO-LVP8-100W-DV-MCCT(8FT)	13550lm	130	IP65	100W	120-347V	0.9	3500K/4000K/5000K	80

Date:

Type:



Project Name:

Part Number:

## DIMENSION



4 FT

47.28 in.

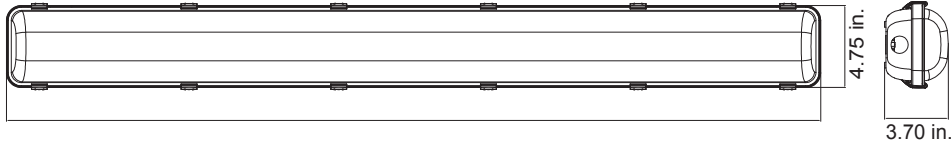


8 FT

94.49 in.

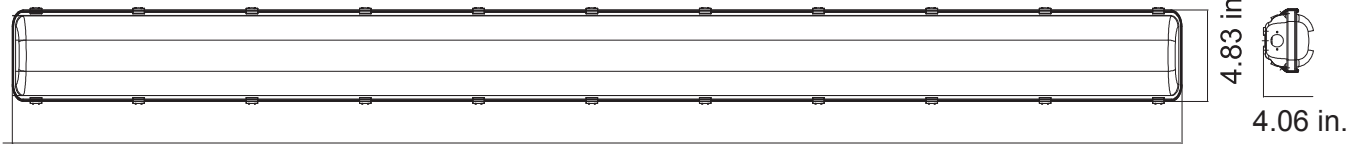

## LUMINOUS EMITTANCE

40W




■ 0° H ■ 90° H ■ Max Cd: 60° H

### FLOOD SUMMARY

	Efficiency %	Lumens	Horiz. Spread	Vert. Spread
Field (10%):	96.1	4,949.9	n/a	160.3
Beam (50%):	65.6	3,375.4	113.7	109.7
Total:	100	5,152.4		

60W



■ 0° H ■ 90° H ■ Max Cd: 60° H

### FLOOD SUMMARY

	Efficiency %	Lumens	Horiz. Spread	Vert. Spread
Field (10%):	95.8	7,303.7	n/a	160.6
Beam (50%):	65.1	4,963.4	118	109.1
Total:	100.1	7,634.1		

