



WALLPACK : FULL CUTOFF

DESCRIPTION

A stylish and slim adjustable wallpack featuring 130lpw efficiency and 0°-90° adjustability.

FEATURES

- 0°-90° adjustable
- Easy installation and maintenance

LISTINGS

- UL Listed for wet locations
- IP65 Rated
- DesignLights Consortium® Premium Qualified - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance

LED CHARACTERISTICS

- Rated lifetime L70: 50,000 hours
- 4000K/5000K CCT
- CRI: 70+

ELECTRICAL

- Input voltage: 120-277V; 120-347V
- Power Factor: >.90
- THD: <20%

CONSTRUCTION

- Integrated aluminum heat sink
- Polycarbonate lens
- Corrosion-resistant coating
- -40°F to 122°F (-40°C to 50°C) operating temperature

WARRANTY

- 5 year limited warranty; see eiko.com for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



12W/35W



50W/75W

APPLICATIONS

- Industrial Parks
- Loading Docks
- Utility Sheds
- Entryways
- Walkways
- Storage Areas
- Security



ORDERING INFORMATION

EXAMPLE: WPA-156-12W-740-UD-BZ

Model	Lumens	Watts	CRI/CCT	Voltage	Dimming	Finish
WPA : Adjustable Wallpack	156 - 1,560 lm	12W - 12W	740 - 70 CRI; 4000K 750 - 70 CRI; 5000K	U - 120-277V H - 120-347V*	D - Dimmable	BZ - Bronze
	455 - 4,550 lm	35W - 35W				
	650 - 6,500 lm	50W - 50W				
	975 - 9,750 lm	75W - 75W				

*120-347V not available on 12W version


PERFORMANCE SUMMARY


Order Code	Item #	Watts	Lumens	CCT	CRI	Volts	Dimming	DLC Premium
11139	WPA-156-12W-740-UD-BZ	12W	1,560	4000K	70+	120-277V	0-10V	✓
11140	WPA-156-12W-750-UD-BZ	12W	1,560	5000K	70+	120-277V	0-10V	✓
11141	WPA-455-35W-740-UD-BZ	35W	4,550	4000K	70+	120-277V	0-10V	✓
11142	WPA-455-35W-750-UD-BZ	35W	4,550	5000K	70+	120-277V	0-10V	✓
11144	WPA-650-50W-740-UD-BZ	50W	6,500	4000K	70+	120-277V	0-10V	✓
11145	WPA-650-50W-750-UD-BZ	50W	6,500	5000K	70+	120-277V	0-10V	✓
11146	WPA-975-75W-740-UD-BZ	75W	9,750	4000K	70+	120-277V	0-10V	✓
11147	WPA-975-75W-750-UD-BZ	75W	9,750	5000K	70+	120-277V	0-10V	✓
11148	WPA-455-35W-740-HD-BZ	35W	4,550	4000K	70+	120-347V	0-10V	✓
11149	WPA-455-35W-750-HD-BZ	35W	4,550	5000K	70+	120-347V	0-10V	✓
11150	WPA-650-50W-740-HD-BZ	50W	6,500	4000K	70+	120-347V	0-10V	✓
11151	WPA-650-50W-750-HD-BZ	50W	6,500	5000K	70+	120-347V	0-10V	✓
11152	WPA-975-75W-740-HD-BZ	75W	9,750	4000K	70+	120-347V	0-10V	✓
11153	WPA-975-75W-750-HD-BZ	75W	9,750	5000K	70+	120-347V	0-10V	✓

AVAILABLE ACCESSORIES


Order Code	Item #	Description
11154	WPAYOKESM	Adjustable Wall Pack Yoke Mount Small (12W/35W models)
11155	WPAKNUCKLESM	Adjustable Wall Pack Knuckle Mount Small (12W/35W models)
11156	WPAYOKEMD	Adjustable Wall Pack Yoke Mount Medium (50W/75W models)
11157	WPAKNUCKLEMD	Adjustable Wall Pack Knuckle Mount Medium (50W/75W models)

DIMENSIONS

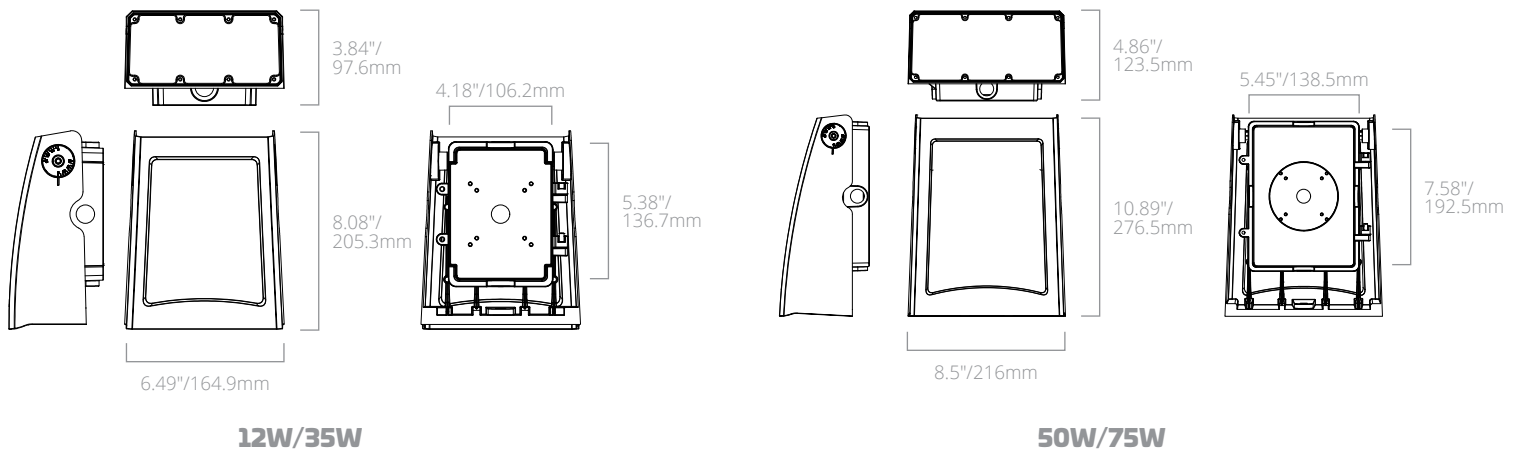


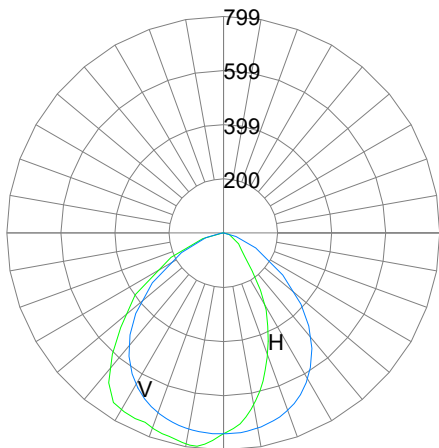


12W

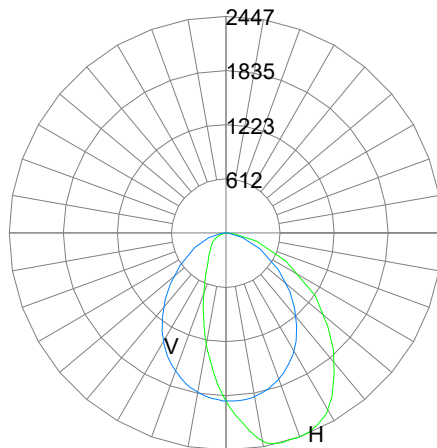

35W

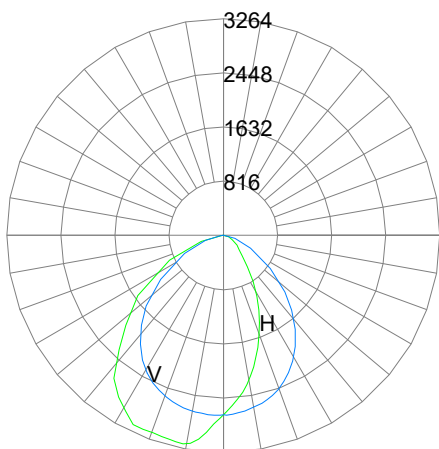

50W

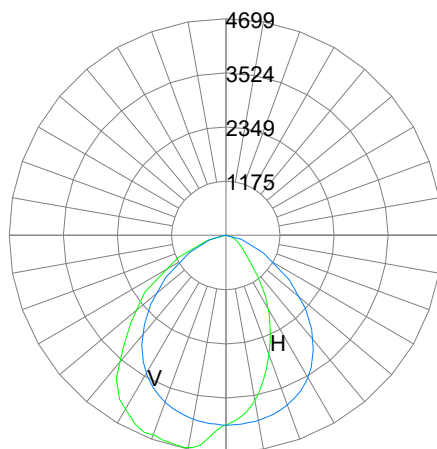

75W