



WMG : LED WALLPACK GLASS

DESCRIPTION

- Dimming standard on 3C, 4C and 5C models
- UV stabilized powder-coated bronze finish
- Enclosure and hardware are corrosion resistant

LISTINGS

- UL Listed for wet locations
- IP65 Rated
- DesignLights Consortium® Qualified - meets DLC requirements for efficacy and lumen maintenance

LED CHARACTERISTICS

- Rated lifetime L70: 50,000 hours
- 4000K, 5000K CCT
- CRI: 70+

ELECTRICAL

- Input voltage: 120-277V; 347-480V
- Power Factor: >.90
- THD: <20%

THERMAL

- -40°F to 104°F (-40°C to 40°C) operating temperature

CONSTRUCTION

- Die-cast aluminum body with traditional HID appearance
- Multiple ½" NPS entry points for conduit and accessories
- Fully sealed and gasketed
- Borosilicate tempered glass lens

WARRANTY

- 5 year limited warranty; see eiko.com for warranty details

| | |
|----------------|---------|
| project name | type |
| catalog number | |
| comments | voltage |
| approved by | date |



WMG-1C



WMG-2C/3C/4C



WMG-5C

APPLICATIONS

- Industrial Parks
- Loading Docks
- Utility Sheds
- Entryways
- Walkways
- Storage Areas
- Security



ORDERING INFORMATION



EXAMPLE: WMG-1C-40K-U

| Model | Package | CCT | Voltage |
|--------------------------|---|--|--|
| WMG : LED Wallpack Glass | 1C - 30W; 3,200 lm 2C - 40W; 4,600 lm / 50W; 5,800 lm 3C - 60W; 7,000 lm 4C - 80W; 9,800 lm 5C - 120W; 13,000 lm | 40K - 4000K 50K - 5000K | U - 120-277V V - 347-480V |

PERFORMANCE SUMMARY

| Order Code | Item # | Watts | Lumens | CCT | CRI | Volts | Dimming | DLC |
|------------|--------------|-------|--------|-------|-----|----------|---------|-----|
| 09802 | WMG-1C-40K-U | 30W | 3,200 | 4000K | 70+ | 120-277V | N/A | ✓ |
| 09574 | WMG-1C-50K-U | 30W | 3,200 | 5000K | 70+ | 120-277V | N/A | ✓ |
| 09803 | WMG-2C-40K-U | 50W | 5,800 | 4000K | 70+ | 120-277V | N/A | ✓ |
| 09807 | WMG-2C-40K-V | 40W | 4,600 | 4000K | 70+ | 347-480V | N/A | ✓ |
| 09575 | WMG-2C-50K-U | 50W | 5,800 | 5000K | 70+ | 120-277V | N/A | ✓ |
| 09596 | WMG-2C-50K-V | 40W | 4,600 | 5000K | 70+ | 347-480V | N/A | ✓ |
| 09804 | WMG-3C-40K-U | 60W | 7,000 | 4000K | 70+ | 120-277V | 0-10V | ✓ |
| 09576 | WMG-3C-50K-U | 60W | 7,000 | 5000K | 70+ | 120-277V | 0-10V | ✓ |
| 09805 | WMG-4C-40K-U | 80W | 9,800 | 4000K | 70+ | 120-277V | 0-10V | ✓ |
| 09577 | WMG-4C-50K-U | 80W | 9,800 | 5000K | 70+ | 120-277V | 0-10V | ✓ |
| 09808 | WMG-4C-40K-V | 80W | 9,800 | 4000K | 70+ | 347-480V | 0-10V | ✓ |
| 09809 | WMG-4C-50K-V | 80W | 9,800 | 5000K | 70+ | 347-480V | 0-10V | ✓ |
| 09806 | WMG-5C-40K-U | 120W | 13,000 | 4000K | 70+ | 120-277V | 0-10V | ✓ |
| 09578 | WMG-5C-50K-U | 120W | 13,000 | 5000K | 70+ | 120-277V | 0-10V | ✓ |


DIMENSIONS

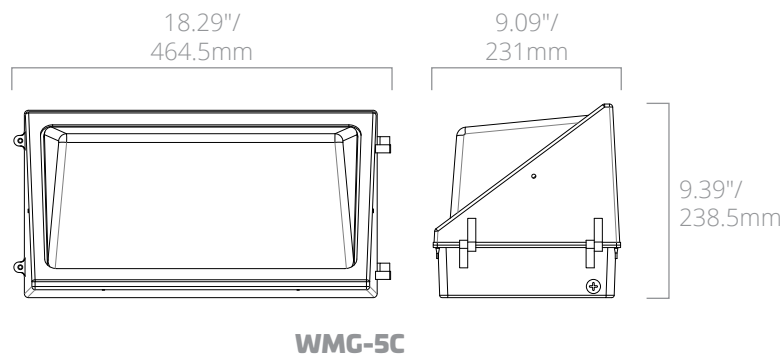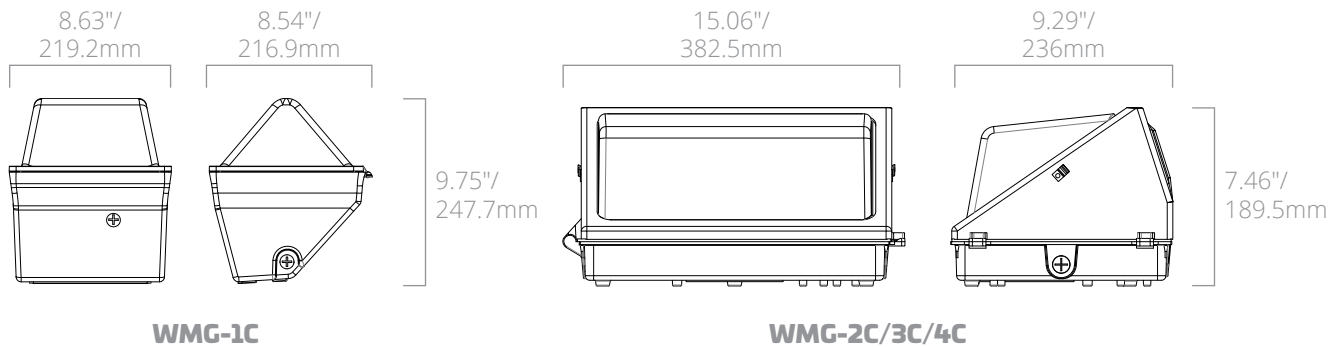


ACCESSORIES

| Order Code | Item # | Description |
|------------|------------|---|
| 09966 | PC1-4036-U | Photocell, Flush Mount, 120-277V |
| 09967 | PC1-4136-U | Photocell, Stem Mount, Side Lens, 120-277V |
| 09968 | PC1-4236-U | Photocell, Stem Swivel Mount, Side Lens, 120-277V |
| 09969 | PC1-4736-U | Photocell, Stem Swivel Mount, Top Lens, 120-277V |


PHOTOMETRICS

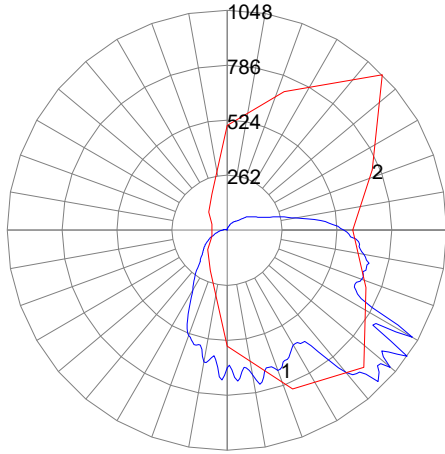


WMG-1C

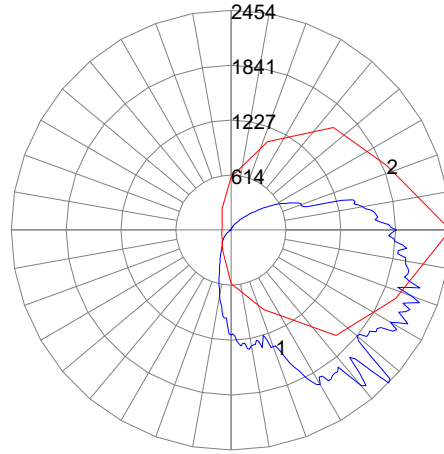


WMG-2C

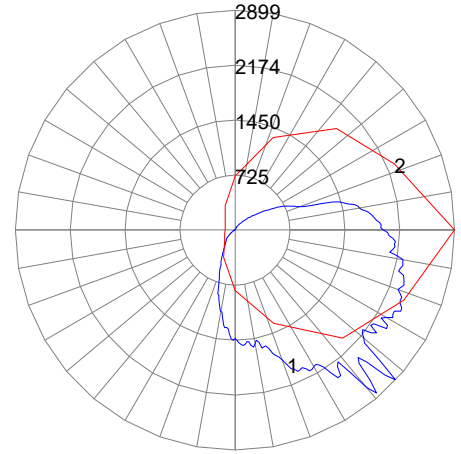

WMG-3C

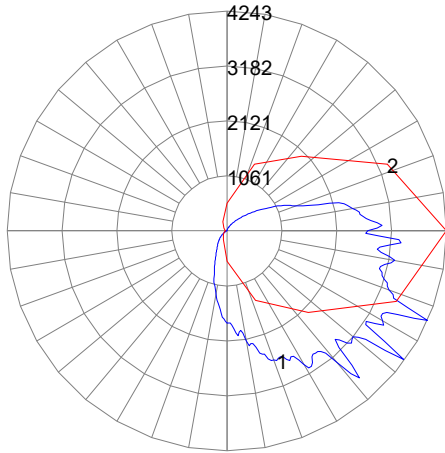

WMG-4C

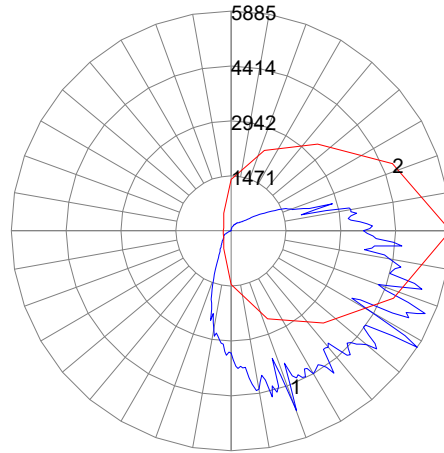

WMG-5C