



## LLW : LED LINEAR WRAP

### DESCRIPTION

A highly efficient LED wrap fixture ideal for lower traffic areas, designed with a high efficacy LED engine to maximize energy savings.

### FEATURES

- 2' and 4' versions
- 110 lumens per watt
- Ideal replacement for less efficient fluorescent wrap fixtures
- Features full length wrap-around U-shaped prismatic acrylic lens

### LISTINGS

- UL Listed for dry/damp locations
- DesignLights Consortium® Premium Qualified - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance

### LED CHARACTERISTICS

- Rated lifetime L70: 50,000 hours
- 4000K CCT
- CRI: 80+

### ELECTRICAL

- Input voltage: 120-277V
- Power Factor: >.90
- THD: <20%

### CONSTRUCTION

- Durable steel body construction with white polyester powder coat finish
- -4°F to 113°F (-20°C to 45°C) operating temperature

### WARRANTY

- 5 year limited warranty; see eiko.com for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



### APPLICATIONS

- Storage areas
- Utility rooms
- Schools
- Stairwell
- Workshops
- Corridors



## ORDERING INFORMATION


EXAMPLE: LLW4-440-40W-8CCT3-UD

Model	Size	Lumens	Watts	CRI/CCT	Voltage
LLW : LED Linear Wrap	2 - 2'	220 - 2,200 lm	20W - 20W	840 - 80 CRI; 4000K	U - 120-277V
	4 - 4'	350 - 3,500 lm	32W - 32W		
		440 - 4,400 lm	40W - 40W		
		528 - 5,280 lm	48W - 48W		


## PERFORMANCE SUMMARY

Order Code	Item #	Watts	Lumens	LPW	CCT	CRI	Volts	DLC
11092	LLW2-220-20W-840-U	20W	2,200	110	4000K	80+	120-277V	✓
11093	LLW4-350-32W-840-U	32W	3,500	109	4000K	80+	120-277V	✓
11094	LLW4-440-40W-840-U	40W	4,400	110	4000K	80+	120-277V	✓
11095	LLW4-528-48W-840-U	48W	5,280	110	4000K	80+	120-277V	✓

## DIMENSIONS

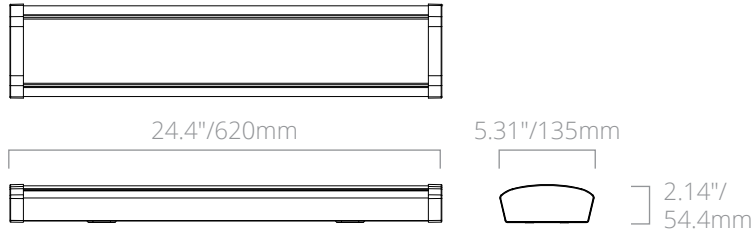

**LLW 2'**

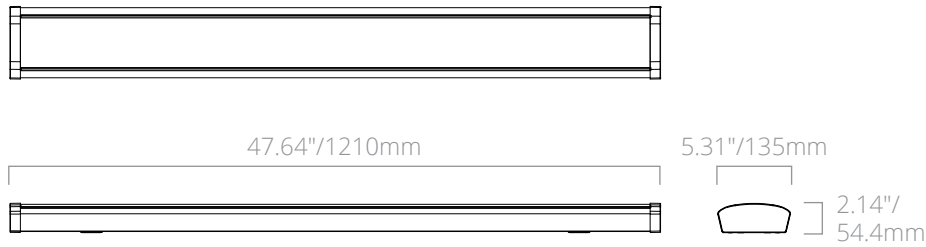

**LLW 4'**