



CONNECTOR BLOKS™

Multiple Primary, Multiple Secondary

AS, AM, AL Series





SPECIFICATIONS

- CSA.
- UL Recognize.

FEATURES

- Compact, versatile and durable.
- 90 °C and 600V.
- High-impact bases.
- One-piece connectors
- No assembly on job site.
- Default SCCR Rating 10,000 Amps.
- Connector Blok™ covers are available in 3 sizes and fits all styles and configurations.

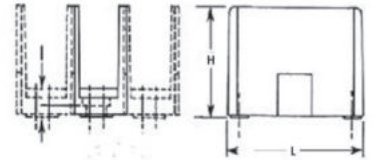

CONNECTOR BLOKS™

CAT. NO.	FIG. NO.	CONFIGURATION				AMPS PER POLE	LENGTH (L) (IN.)	HEIGHT (W) (IN.)	WIDTH (H) (IN.)	STD. PKG. QTY.	STD. CTN. QTY.	
		DRAWING	PRIMARY LINE SIDE	DRAWING	SECONDARY LOAD SIDE							
AS-K2-H6	1		2/0-14 AWG		4-14 AWG	350	2.900	2.714	1.040	1	3	
AM-K2-H6	1		2/0-14 AWG		4-14 AWG	350	4.000	2.620	1.710	1	3	
AM-K2-H12	1		2/0-14 AWG		4-14 AWG	350	4.000	2.620	1.710	1	3	
AM-K2-I6	1		2/0-14 AWG		2-14 AWG	350	4.000	2.620	1.710	1	3	
AL-P2-H12	1		350 MCM-6 AWG		4-14 AWG	620	5.500	3.250	2.900	1	3	
AL-P2-K6	1		350 MCM-6 AWG		2/0-14 AWG	620	5.500	3.250	2.900	1	3	
AL-R2-H12	1		500 MCM-4 AWG		4-14 AWG	760	5.500	3.250	2.900	1	3	
AL-R2-K6	1		500 MCM-4 AWG		2/0-14 AWG	760	5.500	3.250	2.900	1	3	
AL-R2-M4	1		500 MCM-4 AWG		4/0-6 AWG	760	5.500	3.250	2.900	1	3	
ACCESSORIES										CONNECTOR BLOK COVER		STD. CTN. QTY.
CS	2	For use with connector Block AS Series									12	
CM	2	For use with connector Block AM Series									9	
CL	2	For use with connector Block AL Series									6	