

# CONNECTOR BLOKS™

## Splicer Reducer, Primary Secondary

AS, AM, AL Series





### SPECIFICATIONS

- CSA.
- UL Recognize.

### FEATURES

- Compact, versatile and durable.
- 90 °C and 600V.
- High-impact bases.
- One-piece connectors
- No assembly on job site.
- Default SCCR Rating 10,000 Amps.
- Connector Blok™ covers are available in 3 sizes and fits all styles and configurations.

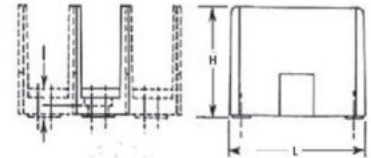

CAT. NO.	FIG. NO.	CONFIGURATION				AMPS PER POLE	LENGTH (L) (IN.)	HEIGHT (W) (IN.)	WIDTH (H) (IN.)	STD. PKG. QTY.	STD. CTN. QTY.
		DRAWING	PRIMARY LINE SIDE	DRAWING	SECONDARY LOAD SIDE						
AS-I1-I1	1		2-14 AWG		2-14 AWG	115	2.900	2.714	1.040	1	3
AS-K1-K1	1		2/0-14 AWG		2/0-14 AWG	175	2.900	2.714	1.040	1	3
AM-N1-N1	1		250MCM-6 AWG		250MCM-6 AWG	310	4.000	2.620	1.710	1	3
AM-P1-P1	1		350MCM-6 AWG		350MCM-6 AWG	350	4.000	2.620	1.710	1	3
AM-R1-R1	1		500MCM-4 AWG		500MCM-4 AWG	380	4.000	2.620	1.710	1	3
AS-K2-K2	1		2/0-14 AWG		2/0-14 AWG	350	2.900	2.714	1.040	1	3
AL-P2-P2	1		350MCM-6 AWG		350MCM-6 AWG	620	5.500	3.250	2.900	1	3
AL-R2-R2	1		500MCM-4 AWG		500MCM-4 AWG	760	5.500	3.250	2.900	1	3
ACCESSORIES		CONNECTOR BLOK COVER									STD. CTN. QTY.
CS	2	For use with connector Blok AS Series									12
CM	2	For use with connector Blok AM Series									9
CL	2	For use with connector Blok AL Series									6