

MINITERMS

Male & Female Plugs & Adapters, Plier Taps & Pin Terminal


PM, PF, PTC, PT Series

SPECIFICATIONS

- **Nylon Male Plugs:** Electro tin plated copper, Nylon, 600V, 75 °C.
- **Nylon Female Plugs:** Electro tin plated copper, Nylon, 600V, 105 °C.
- **Vinyl Piercing Taps:** Electro tin plated copper, Vinyl (PVC), 600V, 75 °C.
- **Vinyl Pin Terminal:** Electro tin plated copper, 600V, 75 °C.
- **Un-Insulated Male/Female Adapters:** Brass, quick disconnect easy-entry, 600V, 105 °C.

FEATURES

- Uninsulated/Nylon Female Plugs are styled with safety and reliability.
- Vinyl Plier Taps have an insulated piercing tap.
- Vinyl Pin Terminals are designed for use in terminal blocks.
- Un-Insulated Male/Female adapters have similar tongue to a quick disconnects for use in terminal blocks or interconnect splices.

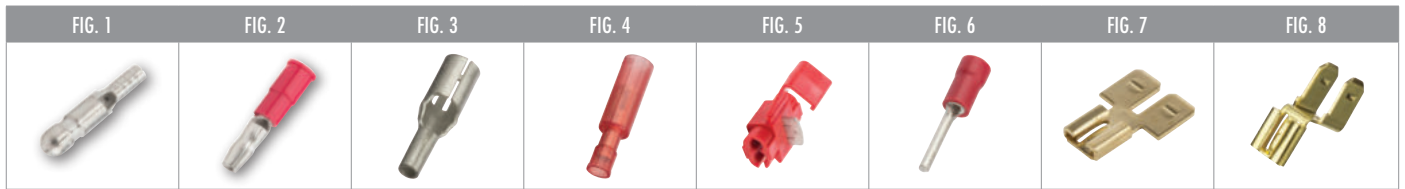

| FIG. NO. | STYLE | INSULATION TYPE | WIRE RANGE | STUD SIZE | RATINGS | LENGTH (L) (IN.) | WIDTH (W) (IN.) | SEAM TYPE | "S" PACKS | | PRO PACKS | | STD PACKS | | BULK PACKS | |
|----------|------------------------|-----------------|------------|-----------|---------|------------------|-----------------|-----------|------------|-----|------------|-----|------------|-----|-----------------|------|
| | | | | | | | | | CAT. NO. | QTY | CAT. NO. | QTY | CAT. NO. | QTY | CAT. NO. | QTY |
| 1 | Plugs Male | Un-insulated | 22-18 | 0.157 | — | 0.630 | 0.145 | Butted | — | — | — | — | PM22-157 | 100 | PM22-157-BULK | 1000 |
| 1 | Plugs Male | Un-insulated | 16-14 | 0.157 | — | 0.630 | 0.136 | Butted | — | — | — | — | PM16-157 | 100 | PM16-157-BULK | 1000 |
| 2 | Plugs Male | Nylon | 22-18 | 0.157 | UR | 0.890 | 0.145 | Butted | — | — | — | — | PM22-157N | 100 | PM22-157N-BULK | 1000 |
| 2 | Plugs Male | Nylon | 16-14 | 0.157 | UR | 0.890 | 0.145 | Butted | — | — | — | — | PM16-157N | 100 | PM16-157N-BULK | 1000 |
| 3 | Plugs Female | Un-insulated | 22-18 | 0.157 | — | 0.680 | 0.194 | Butted | — | — | — | — | PF22-157 | 100 | PF22-157-BULK | 1000 |
| 3 | Plugs Female | Un-insulated | 16-14 | 0.157 | — | 0.680 | 0.185 | Butted | — | — | — | — | PF16-157 | 100 | PF16-157-BULK | 1000 |
| 4 | Plugs Female | Nylon | 22-18 | 0.157 | UR | 1.000 | 0.128 | Butted | — | — | — | — | PF22-157N | 100 | PF22-157N-BULK | 1000 |
| 4 | Plugs Female | Nylon | 22-18 | 0.157 | — | 1.234 | 0.309 | Butted | — | — | — | — | PFS22-157N | 100 | PFS22-157N-BULK | 1000 |
| 4 | Plugs Female | Nylon | 16-14 | 0.157 | UR | 1.000 | 0.150 | Butted | — | — | — | — | PF16-157N | 100 | PF16-157N-BULK | 1000 |
| 4 | Plugs Female | Nylon | 16-14 | 0.157 | — | 1.233 | 0.339 | Butted | — | — | — | — | PFS16-157N | 100 | PFS16-157N-BULK | 1000 |
| 4 | Plugs Female | Nylon | 16-14 | 0.197 | — | 1.233 | 0.339 | Butted | — | — | — | — | PFS16-197N | 100 | PFS16-197N-BULK | 1000 |
| 5 | Plier Tap Connector | Vinyl | 22-18 | n/a | cULus | 0.790 | 0.550 | — | — | — | — | — | PTC22-18 | 100 | PTC22-18-BULK | 500 |
| 5 | Plier Tap Connector | Vinyl | 16-14 | n/a | cULus | 0.790 | 0.550 | — | — | — | — | — | PTC16-14 | 100 | PTC16-14-BULK | 500 |
| 5 | Plier Tap Connector | Vinyl | 12-10 | n/a | cULus | 0.800 | 0.740 | — | — | — | — | — | PTC12-10 | 50 | PTC12-10-BULK | 250 |
| 6 | Pin Terminal | Vinyl | 22-18 | n/a | cULus | 0.930 | 0.078 | Butted | — | — | — | — | PT-22V | 100 | PT-22V-BULK | 1000 |
| 6 | Pin Terminal | Vinyl | 16-14 | n/a | cULus | 0.930 | 0.078 | Butted | — | — | — | — | PT-16V | 100 | PT-16V-BULK | 1000 |
| 6 | Pin Terminal | Vinyl | 12-10 | n/a | cULus | 1.120 | 0.107 | Butted | — | — | — | — | PT-12V | 50 | PT-12V-BULK | 500 |
| 7 | Male/Female Adapter | Un-insulated | n/a | 0.250 | — | 0.825 | 0.564 | — | DMT250-3-S | 15 | DMT250-3-P | 60 | DMT250-3 | 100 | DMT250-3-BULK | 1000 |
| 8 | Male/Female Adapter 90 | Un-insulated | n/a | 0.250 | — | 0.825 | 0.564 | — | — | — | — | — | 250-3-Z | 100 | 250-3-Z-BULK | 1000 |