

# MINITERMS

## High Temperature Spade, Ring, Piggyback & Disconnect

HT Series

### FEATURES

- Un-Insulated Disconnect Females have similar tongue style to a spade. Block spades have longer, flatter sides designed for use in terminal blocks.
- Terminals designed for high temperature operating conditions.

### SPECIFICATIONS

- **Un-Insulated Spade:** Spade style terminal, Nickel plated copper, 900 °F.
- **Un-Insulated Ring Terminal:** Ring style terminal, Nickel plated copper, brazed seam, 900 °F.
- **Un-Insulated Piggyback:** Turned up edges give this space more safety and reliability.
- **Un-Insulated Male Disconnect:** Quick male disconnect with butted seam, 600V, 105 °C.
- **Un-Insulated Female Disconnect:** Female quick disconnect with butted seam, 600V, 105 °C.

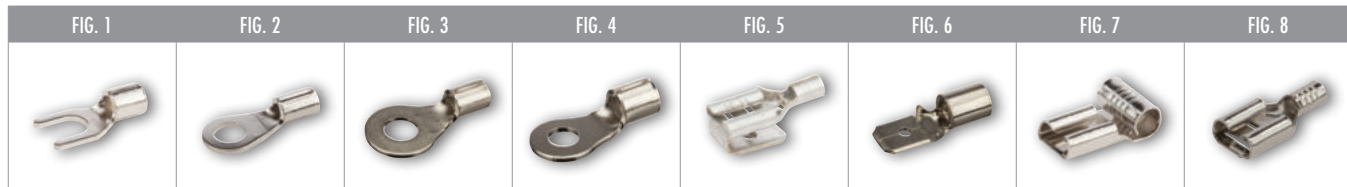


FIG NO.	STYLE	INSULATION TYPE	WIRE RANGE	STUD SIZE	RATINGS	LENGTH (L) (IN.)	WIDTH (W) (IN.)	SEAM TYPE	"S" PACKS		PRO PACKS		STD PACKS		BULK PACKS		
									CAT. NO.	QTY	CAT. NO.	QTY	CAT. NO.	QTY	CAT. NO.	QTY	
1	Spade	Un-insulated	12-10	#10	—	0.499	0.384	Butted	HTS12-10-S	15	—	—	—	—	—	HTS12-10-BULK	1000
2	Ring	Un-insulated	22-18	#10	—	0.443	0.325	Butted	—	—	—	—	HTR22-10	100	—	HTR22-10-BULK	1000
2	Ring	Un-insulated	22-18	#6	—	0.443	0.270	Butted	—	—	—	—	HTR22-6	100	—	HTR22-6-BULK	1000
3	Ring	Un-insulated	16-14	#10	—	0.450	0.384	Butted	—	—	HTR16-10-P	100	HTR16-10	100	—	HTR16-10-BULK	1000
3	Ring	Un-insulated	16-14	#6	—	0.470	0.345	Butted	—	—	—	—	HTR16-6	100	—	HTR16-6-BULK	1000
3	Ring	Un-insulated	16-14	#8	—	0.444	0.390	Butted	—	—	—	—	HTR16-8	100	—	HTR16-8-BULK	1000
4	Ring	Un-insulated	12-10	1/4	—	0.616	0.482	Butted	—	—	—	—	HTR12-14	50	—	HTR12-14-BULK	1000
4	Ring	Un-insulated	12-10	#10	—	0.530	0.384	Butted	—	—	HTR12-10-P	60	HTR12-10	50	—	HTR12-10-BULK	1000
4	Ring	Un-insulated	12-10	#8	—	0.530	0.384	Butted	—	—	—	—	HTR12-8	50	—	HTR12-8-BULK	1000
5	Piggyback	Un-insulated	16-14	0.250	—	0.625	0.291	Butted	—	—	—	—	HTP16-250-3	—	—	HTP16-250-3-BULK	1000
6	Disconnect Male	Un-insulated	12-10	0.250	—	0.685	0.250	Butted	—	—	—	—	HTM12-250-3	50	—	HTM12-250-3-BULK	1000
7	Disconnect Female Flag	Un-insulated	16-14	0.250	—	0.506	0.312	Butted	—	—	HTSF16-250-3-P	60	HTSF16-250-3	60	—	HTSF16-250-3-BULK	1000
7	Disconnect Female Flag	Un-insulated	12-10	0.250	—	0.587	0.294	Butted	—	—	HTSF12-250-3-P	50	HTSF12-250-3	50	—	HTSF12-250-3-BULK	1000
8	Disconnect Female	Un-insulated	16-14	0.250	—	0.500	0.250	Butted	HTF16-250-3-S	15	HTF16-250-3-P	60	HTF16-250-3	50	—	HTF16-250-3-BULK	1000
8	Disconnect Female	Un-insulated	12-10	0.250	—	0.690	0.304	Butted	HTF12-250-3-S	15	—	—	—	—	—	HTF12-250-3-BULK	500