

MINITERMS

Female Disconnects: Piggyback, Sleeved Barrel & Insulated

P, IFS, IF Series

FEATURES

- Female quick disconnects feature turned up edges for greater retention safety and reliability.

SPECIFICATIONS

- Vinyl/Un-Insulated/Nylon Female Piggyback:** Electro tin plated copper with butter seam, Vinyl, 600V, 105 °F.
- Nylon Female Fully Insulated Sleeved Barrel:** Electro tin plated copper, Nylon, 600V, 105 °F. Female fully insulated quick disconnect with butted seam.
- Nylon Female Fully Insulated:** Female, fully insulated quick disconnect, Nylon, 600V, 105 °C.

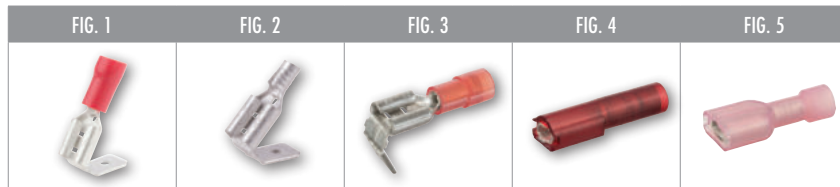


FIG. NO.	STYLE	INSULATION TYPE	WIRE RANGE	STUD SIZE	RATINGS	LENGTH (L) (IN.)	WIDTH (W) (IN.)	"S" PACKS		PRO PACKS		STD PACKS		BULK PACKS	
								CAT. NO.	QTY	CAT. NO.	QTY	CAT. NO.	QTY	CAT. NO.	QTY
1	Female Piggyback	Vinyl	22-18	0.250	cULus	0.826	0.259	-	-	-	-	P22-250-3V	100	P22-250-3V-BULK	1000
1	Female Piggyback	Vinyl	16-14	0.250	cULus	0.826	0.259	P16-250-3V-S	15	P16-250-3V-P	40	P16-250-3V	100	P16-250-3V-BULK	1000
1	Female Piggyback	Vinyl	12-10	0.250	UL	1.010	0.250	-	-	-	-	P12-250-3V	50	P12-250-3V-BULK	500
2	Female Piggyback	Un-insulated	16-14	0.250	-	0.677	0.295	-	-	-	-	P16-250-3	100	P16-250-3-BULK	1000
3	Female Piggyback	Nylon	22-18	0.250	cULus	0.866	0.259	-	-	-	-	P22-250-3N	100	P22-250-3N-BULK	1000
3	Female Piggyback	Nylon	16-14	0.250	cULus	0.866	0.259	-	-	-	-	P16-250-3N	100	P16-250-3N-BULK	1000
4	Female Fully Insulated Sleeved Barrel	Nylon	22-18	0.110	UL	0.800	0.230	-	-	-	-	IFS22-110-2N	100	IFS22-110-2N-BULK	1000
4	Female Fully Insulated Sleeved Barrel	Nylon	22-18	0.110	UL	0.800	0.230	-	-	-	-	IFS22-110-3N	100	IFS22-110-3N-BULK	1000
4	Female Fully Insulated Sleeved Barrel	Nylon	22-18	0.250	UL	0.890	0.380	-	-	-	-	IFS22-250-3N	100	IFS22-250-3N-BULK	1000
4	Female Fully Insulated Sleeved Barrel	Nylon	16-14	0.250	UL	0.890	0.380	-	-	-	-	IFS16-250-3N	100	IFS16-250-3N-BULK	1000
4	Female Fully Insulated Sleeved Barrel	Nylon	12-10	0.250	UL	1.040	0.380	-	-	-	-	IFS12-250-3N	50	IFS12-250-3N-BULK	500
5	Female Fully Insulated	Nylon	22-18	0.110	UL	0.800	0.230	-	-	-	-	IF22-110-2N	100	IF22-110-2N-BULK	1000
5	Female Fully Insulated	Nylon	22-18	0.110	UL	0.800	0.230	-	-	-	-	IF22-110-3N	100	IF22-110-3N-BULK	1000
5	Female Fully Insulated	Nylon	22-18	0.187	UL	0.780	0.320	-	-	-	-	IF22-187-2N	100	IF22-187-2N-BULK	1000
5	Female Fully Insulated	Nylon	22-18	0.187	UL	0.780	0.320	-	-	-	-	IF22-187-3N	100	IF22-187-3N-BULK	1000
5	Female Fully Insulated	Nylon	22-18	0.250	cULus	0.866	0.259	-	-	-	-	IF22-250-3N	100	IF22-250-3N-BULK	1000
5	Female Fully Insulated	Nylon	16-14	0.187	cULus	0.780	0.320	-	-	-	-	IF16-187-2N	100	IF16-187-2N-BULK	1000
5	Female Fully Insulated	Nylon	16-14	0.187	UL	0.780	0.320	-	-	-	-	IF16-187-3N	100	IF16-187-3N-BULK	1000
5	Female Fully Insulated	Nylon	16-14	0.250	cULus	0.866	0.259	IF16-250-3N-S	12	IF16-250-3N-P	50	IF16-250-3N	100	IF16-250-3N-BULK	1000
5	Female Fully Insulated	Nylon	16-14	0.250	-	0.955	0.395	IF16-250-3N-IG-S	10	-	-	IF16-250-3N-IG	100	IF16-250-3N-IG-BULK	1000
5	Female Fully Insulated	Nylon	12-10	0.250	cULus	0.964	0.259	IF12-250-3N-S	12	IF12-250-3N-P	30	IF12-250-3N	50	IF12-250-3N-BULK	500