
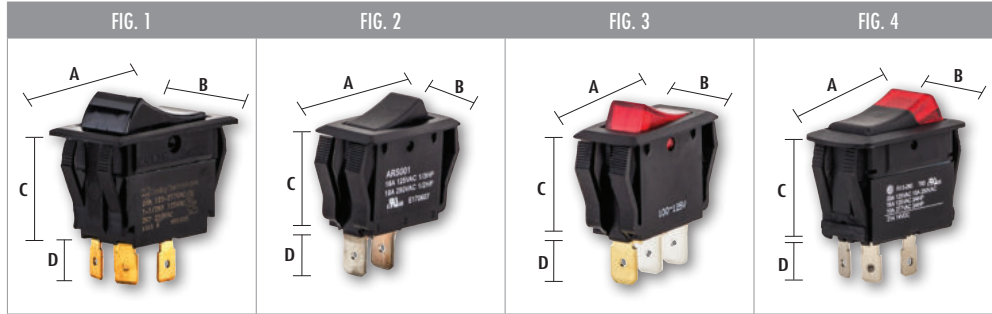


# SWITCHES

## Rocker Switches

### TERMINAL POSITIONS

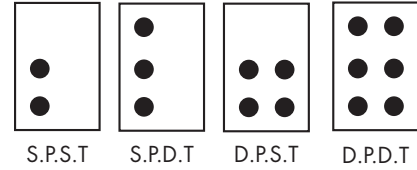

CAT. NO.	FIG. NO.	CIRCUIT FUNC.	POLES & THROWS	RATINGS			VOLTAGE	LAMP COLOR	ACTR. CONTACT	CONNECTION TYPE	STD. CTN. QTY.
				AMPS 125VAC	AMPS 250VAC	HP 125-250VAC					
77010RQ	1	ON-OFF	DPST	20	10	1 1/2 @125,2 @ 250	Non-Lighted	Black	Maintained	0.250 Quikconnect	5
77040RQ	1	ON-ON	DPDT	20	10	1 1/2 @125,2 @ 250	Non-Lighted	Black	Maintained	0.250 Quikconnect	5
77060RQ	1	ON-OFF-ON	DPDT	20	10	1 1/2 @125,2 @ 250	Non-Lighted	Black	Maintained	0.250 Quikconnect	5
77130RQ	1	(ON) OFF (ON)	DPDT	15	10	3/4	Non-Lighted	Black	Momentary	0.250 Quikconnect	5
Dimensions (IN)	1	A: 1.348	B: 0.750	C: 0.762	D: 0.422						
77140RQ (cRUus)	2	ON-OFF	SPST	15	10	-	Non-Lighted	Black	Maintained	0.250 Quikconnect	5
Dimensions (IN)	2	A: 1.250	B: 0.625	C: 0.828	D: 0.406						
77150RQ	3	ON-OFF	SPST	15	7.5	-	-	Red	Maintained	0.250 Quikconnect	5
Dimensions (IN)	3	A: 1.231	B: 0.713	C: 0.812	D: 0.414						
77030RQ	4	ON-OFF	DPST	15	10	3/4 @ 250	125V Incand.	Red	Maintained	0.250 Quikconnect	5
77020RQ	4	ON-OFF	DPST	15	10	3/4 @ 250	125V Neon	Amber	Maintained	0.250 Quikconnect	5
Dimensions (IN)	4	A: 0.426	B: 1.088	C: 0.709	D: 0.345						

( ) = Momentary Position.