
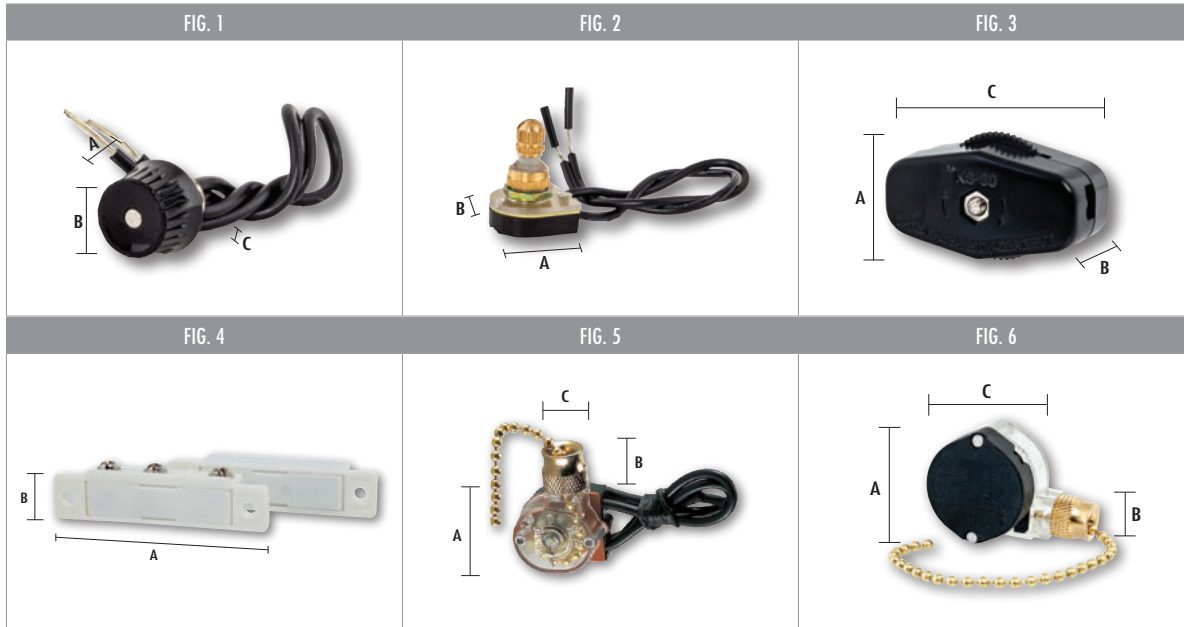


SWITCHES

Rotary Switches & Miscellaneous

TERMINAL POSITIONS

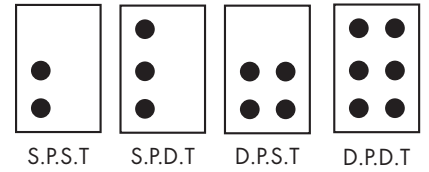

CAT. NO.	FIG. NO.	CIRCUIT FUNC.	POLES & THROWS	AMPS 125VAC	RATINGS AMPS 250VAC	HP 125-250VAC	VOLTAGE	LAMP COLOR	ACTR. CONTACT	CONNECTION TYPE	STD. CTN. QTY.
77300RW	1	ON-OFF	SPST	3	1	Non-Lighted	Rotary Canopy	—	Maintained	Wire Leads	5
Dimensions (IN)	1	A: 0.718	B: 0.600	C: 0.265							
77340RW	2	ON-OFF	SPST	6	3	Non-Lighted	Rotary Canopy	—	Maintained	Wire Leads	5
77320RW	2	OFF-ON-ON-ON	SPST	3	1	Non-Lighted	Rotary Canopy	—	Maintained	Wire Leads	5
Dimensions (IN)	2	A: 1.000	B: 0.844								
79100MS	3	ON-OFF	SPST	6	3	—	—	—	Feed Through Switch	Screws	5
Dimensions (IN)	3	A: 0.844	B: 0.594	C: 1.375							
79200MS	4	N.C. & N.O.	SPDT	5	—	—	—	—	Magnetic Feed Switch	Screws	5
Dimensions (IN)	4	A: 2.500	B: 0.531								
75101CW (cRUus)	5	ON-OFF	SPST	6	3	—	Chain W/Cord	Brass	—	Wire Leads	5
75102CW (cRUus)	5	ON-OFF	SPST	6	3	—	Chain W/Cord	Nickel	—	Wire Leads	5
Dimensions (IN)	5	A: 1.250	B: 0.781	C: 0.594							
75110CW (cRUus)	3	Way/2 Circuit	SP3T	6	3	—	Chain W/Cord	Brass	—	Wire Leads	5
75111CQ (cRUus)	6	OFF-ON-ON-ON	SP3T	6	3	—	Chain W/Cord	Brass	—	Push In	5
Dimensions (IN)	6	A: 1.250	B: 1.125	C: 0.742							