
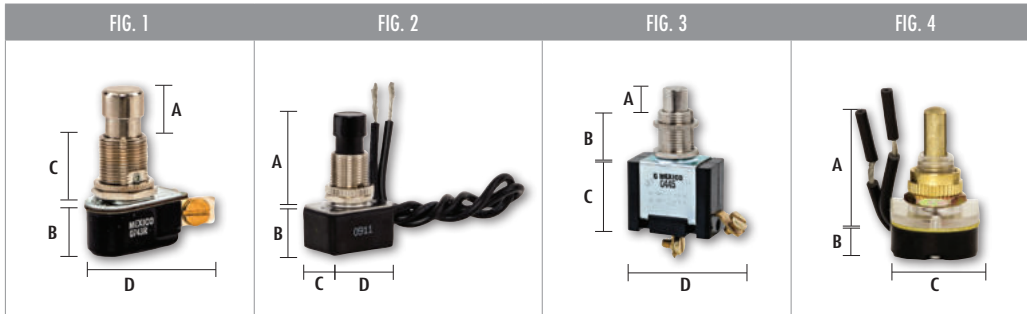


SWITCHES

Pushbutton Switches

TERMINAL POSITIONS

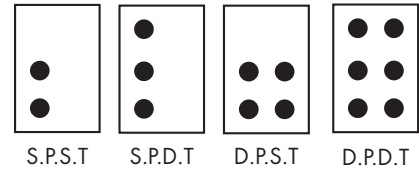

CAT. NO.	FIG. NO.	CIRCUIT FUNC.	POLES & THROWS	RATINGS			ACTUATOR STYLE	ACTUATOR MATERIAL	ACTR. CONTACT	CONN. TYPE	STD. CTN. QTY.
				AMPS 125VAC	AMPS 250VAC	HP 125-250VAC					
76050PS	1	PUSH-ON, PUSH-OFF	SPST	6*	3*	—	Pushbutton	Brass/Nickel	Maintained	Screws	5
76040PW	1	PUSH ON, PUSH OFF	SPST	6	3	1/3 @125	Pushbutton	Brass/Nickel	Maintained	Wire Leads	5
Dimensions (IN)	1	A: 0.437	A: 0.562	C: 0.542	D: 1.183	—	—	—	—	—	—
76010PW	2	PUSH ON, PUSH OFF	SPST	10	5	1/4 @125	Pushbutton	Nylon	Maintained	Wire Leads	5
Dimensions (IN)	2	A: 1.003	B: 0.612	C: 0.550	D: 0.993	—	—	—	—	—	—
76060PS	3	PUSH ON, PUSH OFF	SPST	15	10	—	Pushbutton	Brass/Nickel	Maintained	Screws	5
Dimensions (IN)	3	A: 0.283	B: 0.562	C: 0.982	D: 1.125	—	—	—	—	—	—
76055PS	4	ON-OFF	SPST	6	3	—	Pushbutton	Brass	Maintained	Wire Leads	1
76056PS	4	ON-OFF	SPST	6	3	—	Pushbutton	Nickel	Maintained	Wire Leads	1
76090PW	4	ON-OFF	SPST	6	3	—	Push Canopy	Brass	Maintained	Wire Leads	5
76100PW	4	ON-OFF	SPST	6	3	—	Push Canopy	Bickel	Maintained	Wire Leads	5
Dimensions (IN)	4	A: 0.968	B: 0.313	C: 0.858	—	—	—	—	—	—	—