
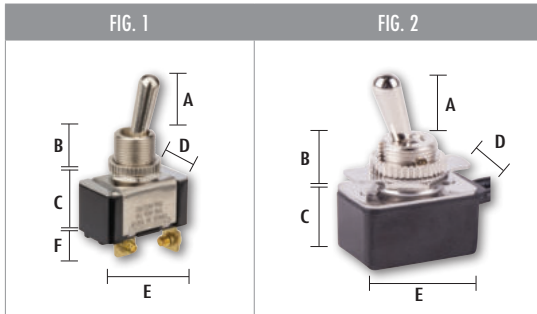


# SWITCHES

## Toggle Switches: Maintained Contact Single Pole

### TERMINAL POSITIONS

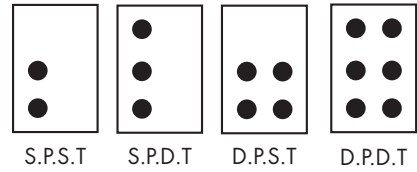

CAT. NO.	FIG. NO.	CIRCUIT FUNC.	POLES & THROWS	RATINGS			ACTUATOR STYLE	ACTUATOR MATERIAL	CONN. TYPE	STD. CTN. QTY.
				AMPS 125VAC	AMPS 250VAC	HP 125-250VAC				
78110TS	1	OFF-ON	SPST	6	3	—	Bat	Brass/Nickel	Screws	5
78120TQ	1	OFF-ON	SPST	20	10	3/4	Bat	Brass/Nickel	0.250 Quikconnect	5
78210TS	1	OFF-ON	SPST	20	10	3/4	Bat	Brass/Nickel	Screws	5
78200TS	1	ON-ON	SPDT	20	10	3/4	Bat	Brass/Nickel	Screws	5
78160TS	1	ON-OFF-ON	SPDT	20	10	3/4	Bat	Brass/Nickel	Screws	5
78070TQ	1	ON-OFF-ON	SPDT	20	10	3/4	Bat	Brass/Nickel	0.250 Quikconnect	5
Dimensions (in)	1	A: .687	B: .465	C: .670	D: .348	E: 1.134	F: .634	THREAD: 15/32-32UNS-2A	KEYWAY: .072 X .038 DP	
78150TW	2	ON-OFF	SPST	10*	4*	1/3	Bat	Brass/Nickel	Wire Leads	5
Dimensions (IN)	2	A: .500	B: .469	C: .685	D: 1.093	E: 1.856	THREAD: 15/32-32		STANDARD 6" WIRE LEADS	