

SWITCHES


Round & Snap-In Rectangular Indicator Lights

SPECIFICATIONS

- 125 Volts Rated.

FEATURES

- High quality indicator lights made of nylon with polycarbonate lens material and neon lamps.
- Connection with 6 inch wire leads.
- More styles and finishes available.
- Available with incandescent lamps.

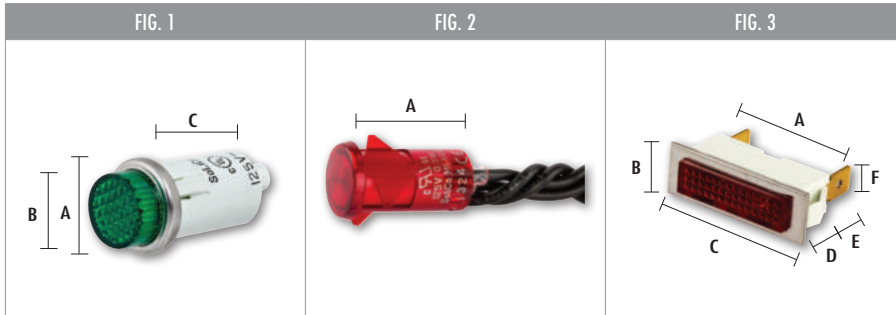

| CAT. NO. | FIG. NO. | PANEL CUTOUT | PANEL THICKNESS | LENS STYLE | LENS COLOR | LENS TYPE | BEZEL COLOR | TYPE OF FIT | CONNECTION TYPE | MTNG. HOLE DIA. | STD. CTN. QTY. |
|-----------------|----------|--------------|----------------------|------------|--------------------------------|-----------|--------------------------------|-------------|-------------------|-----------------|----------------|
| 79770LW | 1 | 0.500 | 0.030 - 0.093 | 0.25 Cyl | Green | Diamond | Stainless | Press | — | 0.500 | 5 |
| 79780LW | 1 | 0.500 | 0.030 - 0.093 | 0.25 Cyl | Red | Diamond | Stainless | Press | — | 0.500 | 5 |
| 79785LW | 1 | 0.500 | 0.030 - 0.093 | 0.25 Cyl | Amber | Diamond | Stainless | Press | — | 0.500 | 5 |
| Dimensions (IN) | 1 | A: 0.210 | B: 0.100 | C: 0.910 | MOUNTING HOLE: 0.500 | | PANEL THICKNESS: 0.030 - 0.093 | | | | |
| 79800LW | 2 | 0.500 | 0.040 - 0.110 | Semi-Dome | Red | Rings | None | Snap In | — | 0.500 | 5 |
| Dimensions (IN) | 2 | A: 1.130 | MOUNTING HOLE: 0.500 | | PANEL THICKNESS: 0.040 - 0.110 | | | | | | |
| 79505LQ | 3 | 0.375 x 1.28 | 0.03 - .10 | — | Red | Diamond | Stainless | — | 0.250 Quikconnect | — | 5 |
| Dimensions (IN) | 3 | A: 1.080 | B: 0.290 | C: 1.380 | D: 0.460 | E: 0.500 | F: 0.370 | G: 0.120 | | | |